CHAPTER 06

Travel beyond the town

Higher speeds reduce the time available between seeing a problem and reaching it. On rural roads and faster routes, plan further ahead and keep enough room to change your mind.

In this chapter

M06-L01 · Read the rural road

M06-L02 · Is passing worth the risk?

M06-L03 · Join faster traffic calmly

M06-L04 · Expect an interrupted route

M06-R · Review and self-assessment

Answers and review guidance

Official references

This material is a learning aid to help you understand Swedish driving theory. It is not an official source and cannot replace official information from Trafikverket and Transportstyrelsen. Always consult their current guidance and the applicable rules.

M06-L01

Read the rural road

Your goal: Identify risks from bends, crests, narrow roads, animals and slow vehicles and justify speed and position changes.

Requirements. Keep right when meeting another vehicle and leave a safe lateral gap. If an obstruction on your side prevents a safe meeting, stop if necessary to let the approaching vehicle pass. Your speed must suit the visible road and foreseeable hazards, with particular care at bends, crests and narrow meetings. Traffic Regulation, chapter 3 §§14–15 and 30

Learning approach. Read the road in sections: the visible straight, the entry to a bend, the portion hidden behind a crest and the next place someone might join. Never extend the clear section in your imagination. A vehicle emerging from a field or a cyclist beyond a bend changes what seemed to be an empty road.

Read the rural road ahead

Independent examples of bends, gradients, narrowings, uneven road and passing places. Gradient numbers are percentages, not a safe-speed formula.

Bends and gradients



A1 · Dangerous bend

Varning för farlig kurva

A hazardous bend lies ahead. The symbol shows its direction; adjust speed before entering it. Left bend.

Transportstyrelsen · official description

Continue the learning



A1-2 · Dangerous bend

Varning för farlig kurva

A hazardous bend lies ahead. The symbol shows its direction; adjust speed before entering it. Right bend.

Transportstyrelsen · official description



A2 · Series of dangerous bends

Varning för flera farliga kurvor

Several hazardous bends lie ahead. The symbol identifies the direction of the first bend. Series of bends, first to the left.

Transportstyrelsen · official description



A2-2 · Series of dangerous bends

Varning för flera farliga kurvor

Several hazardous bends lie ahead. The symbol identifies the direction of the first bend. Series of bends, first to the right.

Transportstyrelsen · official description

Continue the learning



A3 · Steep descent

Varning för nedförslutning

Prepare for a steep downhill section. The number is the gradient in percent, not a speed limit. A descending slope labelled 10 percent.

Transportstyrelsen · official description



A4 · Steep ascent

Varning för stigning

Prepare for a steep uphill section. Read the percentage as a gradient. An ascending slope labelled 10 percent.

Transportstyrelsen · official description

Narrow and uneven roads



A8 · Uneven road

Varning för ojämn väg

Expect surface irregularities or damage that call for a lower speed. Uneven surface inside a warning triangle.

Transportstyrelsen · official description

Continue the learning



A9 · Speed-control hump or dip

Varning för farthinder

A deliberately raised or lowered part of the road is ahead. The graphic distinguishes the form. Raised hump.

Transportstyrelsen · official description



A9-2 · Speed-control hump or dip

Varning för farthinder

A deliberately raised or lowered part of the road is ahead. The graphic distinguishes the form. Dip.

Transportstyrelsen · official description



A25 · Two-way traffic ahead

Varning för mötande trafik

A one-way carriageway changes to a carriageway carrying traffic in both directions. Opposing vertical arrows inside a warning triangle.

Transportstyrelsen · official description

Continue the learning



A27 · Weak or high road edge

Varning för svag vägkant eller hög körbanekant

The edge may be weak or raised relative to the adjacent surface. Keep an appropriate margin. Car at a crumbling road edge inside a warning triangle.

Transportstyrelsen · official description



E18 · Passing place

Mötesplats

This identifies a place for vehicles to pass each other on a narrow road. White M on blue.

Transportstyrelsen · official description

Wild animals and reindeer can appear throughout the year. Trafikverket highlights dawn and dusk and periods of increased animal movement, but the absence of those conditions is not a guarantee. A wildlife fence can be interrupted by access points and does not remove the need to observe. Trafikverket: wildlife

Recognise animal warnings

Each animal symbol has its own meaning. These examples do not imply that unpictured animals are absent.



A19 · Animals ahead

Varning för djur

There is a particular risk of animals on or near the road. Read the animal symbol as part of the warning. Moose silhouette.

Transportstyrelsen · official description



A19-2 · Animals ahead

Varning för djur

There is a particular risk of animals on or near the road. Read the animal symbol as part of the warning. Deer silhouette.

Transportstyrelsen · official description



A19-3 · Animals ahead

Varning för djur

There is a particular risk of animals on or near the road. Read the animal symbol as part of the warning. Cattle silhouette.

Transportstyrelsen · official description

Continue the learning



A19-4 · Animals ahead

Varning för djur

There is a particular risk of animals on or near the road. Read the animal symbol as part of the warning. Horse silhouette.

Transportstyrelsen · official description



A19-5 · Animals ahead

Varning för djur

There is a particular risk of animals on or near the road. Read the animal symbol as part of the warning. Reindeer silhouette.

Transportstyrelsen · official description



A19-6 · Animals ahead

Varning för djur

There is a particular risk of animals on or near the road. Read the animal symbol as part of the warning. Sheep silhouette.

Transportstyrelsen · official description

Continue the learning



A19-7 · Animals ahead

Varning för djur

There is a particular risk of animals on or near the road. Read the animal symbol as part of the warning. Wild boar silhouette.

Transportstyrelsen · official description

A slow vehicle's appearance may resemble a car even when its permitted speed and construction differ. Trafikverket advises other drivers to keep distance and pass only where appropriate. Stay far enough back to see around it and evaluate the road, rather than moving close to demand that it hurry. Slow vehicles and other traffic

Slow vehicles and following space

The 50 m shown on C19 is a particular signed minimum distance, not a universal following gap for slow vehicles.



A31 · Slow vehicles ahead

Varning för långsamtgående fordon

Slow-moving vehicles often cross or enter the road here. Tractor with trailer inside a warning triangle.

Transportstyrelsen · official description

Continue the learning



C19 · Minimum following distance

Minsta avstånd

Keep at least the displayed distance from a motor vehicle ahead travelling in the same direction. 50 metres between two vehicle symbols.

Transportstyrelsen · official description

Plan turns and read animal cues

Turn planning · Choose a safer approach. On an ordinary two-way rural road, heavy traffic may make a direct left turn unsafe. Continue to a suitable, permitted place or route where you can change direction safely, then return to approach the destination with a right turn if that movement is allowed and safe. This can avoid hazardous waiting and crossing the opposing stream at the original entrance. It is a planning alternative, not permission to turn around immediately on the carriageway. If no safe legal return route exists, choose another route or postpone. Trafikverket: example of routing to a turning place

Legal boundary. Before turning or leaving the road, protect oncoming traffic and traffic on the road you enter; take particular care of following traffic. A turnaround must cause neither danger nor obstruction. Signs and access restrictions still apply. Never turn around or reverse on a motorway or expressway. If you can wait safely and legally for a left turn, remember the advice in M04-L02 to keep the front wheels straight; that advice does not make an unsafe turn suitable. Traffic Regulation, chapter 3 §§24, 26, 29 and 46; chapter 9 §§1–2

Worked rural alternative. A farm entrance is on your left and busy traffic leaves no safe opportunity. You continue to an accessible junction route that legally and safely brings you back in the opposite direction. The entrance is then on your right. Check people, traffic and the entrance again before turning; the revised route does not guarantee a safe final movement.

Wildlife observation · Time and terrain. Give extra attention at dawn and dusk, near animal habitats and where fences end or have openings. Scan woodland edges, bushes and small waterways beside the road: Trafikverket's road-project study describes these as animal routes that can conceal an approach. Its national guidance also describes animal passages through fence openings. These are cues for observation and speed planning, not predictions that animals only cross there. Trafikverket: wildlife and fence passages · Trafikverket: habitat example, page 9

Apply the cues. At dusk, woodland meets a field beside a gap in the fence. Read the edges and opening as possible animal approaches, and choose speed for the view and foreseeable hazard. Keep observing even on fenced stretches. Prevention belongs here; actions after a wildlife collision are in M10-L02.

Make room at the narrowing



Narrow bridge: the obstruction is on the teal driver’s right and the van approaches in its own lane. Reduce speed before the narrowing and stop if necessary. The scene does not measure a safe lateral gap.

Worked decision. You approach a narrow bridge with a van coming towards you and an obstruction on your side. You reduce speed before the narrowing and stop if necessary. Do not move into the van's path simply because you reached the obstruction first.

Check your understanding

Knowledge check. (1) No vehicle is visible beyond a crest. Is the road proved clear? (2) Heavy traffic makes your rural left turn unsafe. What alternative can you plan? (3) Which time and roadside cues call for extra wildlife attention?

Remember: Let what you can actually see determine the available space.

M06-L02

Is passing worth the risk?

Your goal: Compare waiting with overtaking using visibility, speed difference, space and a safe completion path.

Requirements. Overtake only without danger and with sufficient clear road. Do not start when a following driver has begun overtaking, or pass on the left when the vehicle ahead signals an intended leftward movement. Leave safe lateral clearance and a safe return opportunity. When being overtaken, do not increase speed or otherwise make the pass harder. Traffic Regulation, chapter 3 §§31–38

The normal passing side is left. Exceptions include a vehicle turning or clearly preparing to turn left, and the specified rules for marked same-direction lanes on roads limited to 70 km/h or less. Passing in queues or destination lanes has separate provisions; it does not remove the need to protect people at crossings. Traffic Regulation, chapter 3 §§7, 31 and 41–42

Restrictions to recognise. Overtaking is generally prohibited immediately before or in a road junction, with specified exceptions for right-side overtaking, police/signal control, or an established yielding/stopping duty on the crossing road. Similar restrictions apply at level crossings, with exceptions for barriers or road-junction-type traffic signals. At an obscured bend or crest, do not use an opposing lane to overtake; the detailed provision contains limited exceptions. Section 39 also contains an exception for passing two-wheeled vehicles without sidecars. That exception does not override the danger prohibition, continuous-line restrictions or the uncontrolled-crossing prohibition. None of these exceptions proves a manoeuvre safe. Traffic Regulation, chapter 3 §39

Do not overtake immediately before or on an uncontrolled pedestrian crossing, uncontrolled cycle passage or cycle crossing. Where parallel-lane passing is legally not classified as overtaking, the special crossing rule still requires a speed allowing an immediate stop for a person on the crossing or passage. Obey signs and continuous-line restrictions as well. Traffic Regulation, chapter 3 §§11, 40–41

Overtaking signs and line information

The prohibition and its end form a pair. For combined lines, identify the line nearest your lane. M20a warns of a coming centre-line or divider change; it is not an ordinary lane-change arrow.



C27 · No overtaking

Förbud mot omkörning

Do not overtake motor vehicles other than two-wheeled mopeds and motorcycles without sidecars. Other overtaking safety rules still apply; the sign restriction continues to C28. Red and black cars side by side.

Transportstyrelsen · official description



C28 · End of overtaking prohibition

Slut på förbud mot omkörning

The prohibition introduced by C27 ends. General overtaking restrictions still apply. Overtaking symbol crossed by diagonal black lines.

Transportstyrelsen · official description

Line information



M3 · Warning line

Varningslinje

Crossing this line is unsuitable because of the traffic conditions. It may also warn of a continuous line ahead. Long white strokes with short gaps.

Transportstyrelsen · official description

Continue the learning



M8 · Continuous line

Heldragen linje

Crossing restrictions apply according to the type of continuous line and the traffic rules. Do not invent an exception merely because the road appears clear. Single and double continuous white lines.

Transportstyrelsen · official description





M10 · Broken line beside a continuous line

Mittlinje eller körfältslinje och heldragen linje

The continuous line governs a driver on its side of the marking. Do not treat the broken line on the other side as permission to change lanes. Broken white line beside a continuous line.

Transportstyrelsen · official description



M11 · Warning line beside a continuous line

Varningslinje och heldragen linje

The continuous-line side restricts lane changes; the warning-line side indicates that crossing is unsuitable. Warning line beside a continuous line.

Transportstyrelsen · official description



M20a · Continuous centre line or divider ahead

Förberedande upplysning om heldragen mittlinje med mera

Between opposing traffic lanes, this marking warns of a continuous centre line or physical separation ahead. It accompanies a centre line or warning line. Diagonal return arrow marking an approaching continuous centre line or physical separation.

Transportstyrelsen · official description

Assess the whole passing path

Learning approach. Before moving, identify the full pass and return path, not merely the first gap. If completing it depends on another driver braking or on exceeding the limit, decline it. Small apparent time savings are not a reason to consume every margin. Trafikverket: speed and journey time



Following a slower vehicle towards a hidden bend. The visible straight does not establish a complete pass and return path. The depicted spacing is illustrative, not a recommended following distance.

Worked decision. A vehicle ahead travels slightly slower than you want. An approaching bend hides the final part of the pass. You stay behind at a useful distance. The first few clear metres do not establish a complete overtaking opportunity.

Check your understanding

Knowledge check. If the vehicle ahead accelerates during your pass, must you complete it at any cost?

Remember: Choosing not to pass is a complete decision.

M06-L03

Join faster traffic calmly

Your goal: Plan motorway entry, lane choice, separation and exit, including a missed exit.

Requirements. Motorways are for eligible motor vehicles and combinations designed and permitted to travel at least 40 km/h; class I mopeds are excluded. This is an eligibility condition, not a command to maintain 40 km/h in a queue. Enter and leave through the designated starts, ends and access routes. Do not reverse, turn around, use the central divider or cross-connections, or stop outside designated parking/rest areas except as an unavoidable incident requires. The relevant restrictions also apply to expressways (motortrafikled) and their access routes. Traffic Regulation, chapter 9 §§1–2

Motorways and expressways

Matched start/end pairs. The road regime does not override vehicle eligibility or the need to reduce speed for conditions.

Motorway



E1 · Motorway

Motorväg

Motorway rules begin here, unless the sign is advance information with a distance panel. White motorway symbol on green.

Transportstyrelsen · official description

Continue the learning



E2 · End of motorway

Motorväg upphör

The motorway ends here or at the distance indicated. Read the regime that follows. Motorway symbol crossed by a red diagonal.

Transportstyrelsen · official description

Expressway



E3 · Expressway (motortrafikled)

Motortrafikled

Expressway rules apply. The sign may also appear as advance information with a distance panel. White car viewed from the front on green.

Transportstyrelsen · official description



E4 · End of expressway

Motortrafikled upphör

The expressway ends here or at the indicated distance. Expressway car symbol crossed by a red diagonal.


Transportstyrelsen · official description

Continue the learning

In an acceleration lane, adapt speed to the traffic in the lane you intend to join and enter as soon as it can be done without danger or unnecessary obstruction. A safe joining movement is your responsibility; other drivers who notice the intended entry must adapt speed to facilitate it. Entry without an acceleration lane has a yielding rule. Traffic Regulation, chapter 3 §§21, 23 and 43

Read the joining-road layout

Independent joining and lane-configuration examples. A road retaining its own lane differs from an acceleration lane; visual resemblance alone does not establish priority.

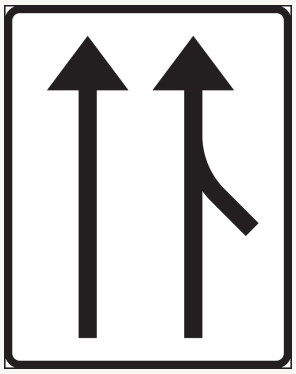


F19 · Joining road with acceleration lane

Väganslutning med accelerationsfält

The diagram shows a joining road with an acceleration lane. It does not give a joining driver an unconditional right to enter. A road joins from the right through an acceleration lane alongside one forward lane.

Transportstyrelsen · official description

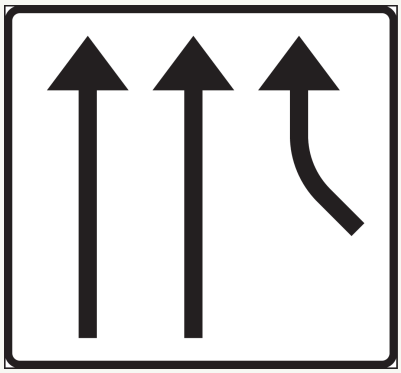


F20 · Joining road with its own lane

Väganslutning med separat körfält

The joining road continues in a separate lane. Read the actual lane layout and markings. A joining road becomes a separate forward lane beside two existing lanes.

Transportstyrelsen · official description

Continue the learning

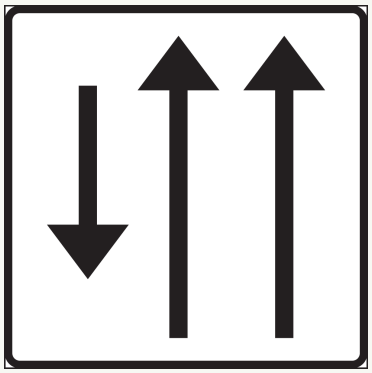


F18 · Lane directions along a road

Körfältsindelning på sträcka

The arrows show the travel direction in each lane; any separation shown is part of the layout. One opposing lane on the left and two forward lanes on the right.

Transportstyrelsen · official description

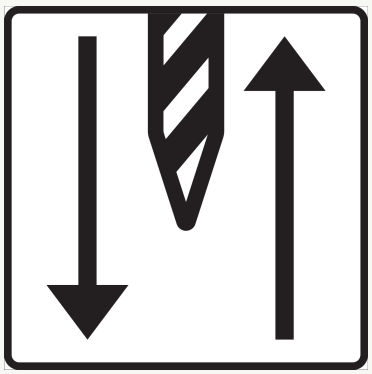

F18-2 · Lane directions along a road

Körfältsindelning på sträcka

The arrows show the travel direction in each lane; any separation shown is part of the layout. One opposing lane and one forward lane with a divider between them.

Transportstyrelsen · official description

Normally use the rightmost lane intended for your vehicle. Keep a following distance suited to speed, visibility and conditions; do not copy a car ahead that is following too closely. Signs may establish a lower maximum than a road's general limit, and your vehicle combination may have a lower limit again. Traffic Regulation, chapter 3 §§2 and 7, chapter 4 §20 and chapter 9 §1

For an exit, take the suitable lane in good time and enter the deceleration lane as soon as possible. If you miss the exit, continue to a permitted exit and re-plan; never reverse to recover it. A breakdown is dealt with in M10-L01, not by using the shoulder as a convenient place to check navigation.

Prepare the exit early

Independent navigation examples, not a single continuous route connecting the printed destinations. The separation marker does not authorise a late lane change.



F4 · Advance exit information

Avfartsorienteringstavla

An exit is ahead at the indicated distance. Prepare the appropriate lane safely. Advance exit towards Ornäs, 500 m ahead, while route 50 continues ahead.

Transportstyrelsen · official description



F7 · Exit direction sign

Avfartsvisare

The exit begins at this sign. Do not make a late unsafe lane change to reach it. Exit sign pointing towards Mora via route 70 and towards Enköping.

Transportstyrelsen · official description



F8 · Overhead lane destinations

Körfältsvägvisare

Use the lane or lanes beneath the relevant destination. Read any distance given for an upcoming exit. Overhead destinations: Boda on the left panel; Falun via route 50 on the right panel.

Transportstyrelsen · official description

Continue the learning



F8-2 · Overhead lane destinations

Körfältsvägvisare

Use the lane or lanes beneath the relevant destination. Read any distance given for an upcoming exit. Overhead lane information for Stockholm and Enköping via E18, with an exit in 500 m.

Transportstyrelsen · official description



F27 · Interchange number

Trafikplatsnummer

This identifies the interchange number and may include an exit designation. Interchange number 75.

Transportstyrelsen · official description



X4 · Exit separation marker

Avfartsskärm

This marks the split between the main carriageway and an exit with a deceleration lane. White upward chevrons on blue identify an exit separation.

Transportstyrelsen · official description

Adjust after faster traffic

After the motorway · Recheck your speed. After a long period at a steady motorway speed, your perception can adapt to that pace. On a slower road, the correct lower speed may feel unusually slow. This effect is often called speed adaptation or velocitation. Check the speedometer regularly to judge actual speed and adjust to the current limit and conditions. The feeling alone is not evidence that the speedometer is faulty. ODOT: speed perception and speedometer checks

Worked transition. After a long motorway trip, you leave onto a road signed 50 km/h. At 50, the car feels as if it is crawling. Confirm the speedometer reading, read the new road and retain a speed suited to its limit, visibility and hazards. Do not accelerate merely to recover the motorway's familiar feeling.

Plan entry and exit



Acceleration-lane detail: the teal car approaches traffic already on the main carriageway. Judge speed and a safe joining opportunity; this still image does not guarantee a usable gap.



Exit detail: plan the receiving lane early. If the necessary move cannot be made safely, continue to a permitted exit and re-plan; never reverse to recover the route.

Worked decision. Your exit sign appears while another vehicle occupies the lane you would need to cross. You do not force the move. You continue safely and tell your passenger the route will change.

Check your understanding

Knowledge check. (1) Does a posted motorway limit override a lower trailer-combination limit? (2) After prolonged motorway driving, the lower speed on your new road feels too slow. What explains that feeling, and what should guide your speed?

Remember: Prepare the next movement before the road makes it urgent.

M06-L04

Expect an interrupted route

Your goal: Interpret railway-crossing and roadworks information and approach changed lanes, queues and barriers safely.

Railway requirements. Approach with particular care and at a speed that allows a stop before the crossing. Do not enter when a train or tram is approaching, a red signal shows, an audible warning sounds, a barrier is lowering, lowered or rising, or you might have to stop on the tracks. Cross without unnecessary delay only when it is permitted and there is room beyond. Traffic Regulation, chapter 2 §7

Railway warnings and crossing controls

Advance warnings, three/two/one countdown markers, crossbucks and active controls have different roles. Countdown boards do not specify fixed metre intervals. A still image does not reproduce flashing or sound. No crossing-ID number is invented.

Advance warnings



A35 · Rail crossing with barriers

Varning för järnvägskorsning med bommar

A railway or tramway crossing fitted with barriers lies ahead. Follow its signals and barrier indications. Barrier pictogram inside a warning triangle.

Transportstyrelsen · official description

Continue the learning



A36 · Rail crossing without barriers

Varning för järnvägskorsning utan bommar

Prepare for a railway crossing without barriers. The lack of barriers does not mean a train cannot approach. Locomotive inside a warning triangle.

Transportstyrelsen · official description



A37 · Tram crossing without barriers

Varning för korsning med spårväg utan bommar

A tramway crossing without barriers lies ahead. Tram inside a warning triangle.

Transportstyrelsen · official description

Countdown to the crossing



A38 · Rail-crossing countdown

Avstånd till plankorsning

The three markers divide the approach into thirds. They do not represent a universal fixed distance in metres. Three red diagonal bars on a yellow board.

Transportstyrelsen · official description

Continue the learning




A38-2 · Rail-crossing countdown

Avstånd till plankorsning

The three markers divide the approach into thirds. They do not represent a universal fixed distance in metres. Two red diagonal bars on a yellow board.

Transportstyrelsen · official description



A38-3 · Rail-crossing countdown

Avstånd till plankorsning

The three markers divide the approach into thirds. They do not represent a universal fixed distance in metres. One red diagonal bar on a yellow board.

Transportstyrelsen · official description

Crossing markers




A39 · Railway crossbuck

Kryssmärke

The crossing is immediately ahead. The crossbuck arrangement distinguishes one track from multiple tracks. A single horizontal crossbuck, for one track.

Transportstyrelsen · official description

Continue the learning

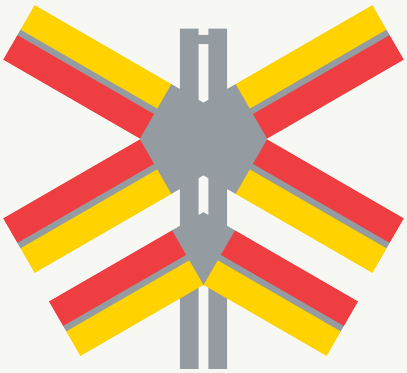

A39-3 · Railway crossbuck

Kryssmärke

The crossing is immediately ahead. The crossbuck arrangement distinguishes one track from multiple tracks. An additional lower crossbuck element indicates multiple tracks.

Transportstyrelsen · official description

Signals, sound and barriers



Y1 · Flashing red rail-crossing signal

Rött blinkande ljus

Stop before the stop line or, without one, before the signal. The red lamps flash alternately; the illustration is a still representation. Two red signal lamps and a lower lamp within a downward-pointing signal backing; red flashing is represented by a still drawing.

Transportstyrelsen · official description




Y2 · Rail-crossing audible warning

Ljudsignal

Do not enter the crossing while the audible warning is sounding. This graphic is only a sound icon, not a recording or a flashing-light instruction. Grey speaker icon with sound waves; no audio is supplied.

Transportstyrelsen · official description

Continue the learning



Y3 · Rail-crossing barrier

Bom

Do not enter while a barrier is lowering, lowered or rising. A raised barrier alone does not establish that crossing is safe. Red-and-yellow crossing barrier with a red lamp.

Transportstyrelsen · official description



Y4 · Rail-crossing visibility marker

Plankorsningsskärm

This helps you identify a railway or tramway crossing. It is not itself a signal that permits entry. Blue board with white crossing shapes arranged vertically.

Transportstyrelsen · official description

Two different emergencies. Trafikverket says that if warnings begin while you are already crossing, continue out. If a functioning vehicle is trapped between the barriers, drive through the barrier to leave the tracks. If the vehicle has broken down on the tracks, evacuate everyone promptly, move well away and call 112. Give the crossing ID from the crossbuck sign if available without returning to danger. Do not stay on the tracks attempting a repair or pushing exercise. Trafikverket: level-crossing safety

Roadworks. Expect changed lanes, reduced speeds, workers and queues. Follow the current signs, signals and authorised guard directions; allow room around work areas and keep distance. A familiar road may now have a different usable path. Temporary guidance deserves attention before you reach the first barrier, not after you have entered the work area. Trafikverket: roadworks · Traffic Regulation, chapter 2 §2 and chapter 3 §15

Roadworks and temporary guidance

Independent recognition sets, not one verified work-zone layout. Keep directional, diagonal and horizontal markers distinct. Actual signs, signals and authorised directions govern the route.

Warnings



A20 · Roadworks

Varning för vägarbete

Work is taking place along the road. Expect the usable route and traffic arrangements to change. Worker digging inside a warning triangle.

Transportstyrelsen · official description



A21 · End of roadworks section

Slut på sträcka med vägarbete

The section marked by the roadworks warning ends here. Continue to follow any remaining restrictions. Roadworker pictogram crossed by a black diagonal band.

Transportstyrelsen · official description



A22 · Traffic signals ahead

Varning för flerfärgssignal

Prepare for a three-aspect traffic signal ahead; the warning itself is not a signal to proceed. Red, yellow and green lamps inside a warning triangle.

Transportstyrelsen · official description

Continue the learning



A40 · Other danger

Varning för annan fara

A hazard not covered by another warning sign is ahead. Read the supplementary description of the danger. Exclamation mark inside a warning triangle.

Transportstyrelsen · official description



A34 · Queues ahead

Varning för kö

A queue may form on this stretch. Look far enough ahead to respond to slowing or stationary traffic. Queue of cars inside a warning triangle.

Transportstyrelsen · official description

Diversions and temporary routes




F23 · Advance temporary diversion

Orienteringstavla för omledningsväg

The ordinary road is temporarily closed. The diagram shows the diversion route. Orange diagram routes traffic around a closed part of the road.

Transportstyrelsen · official description

Continue the learning

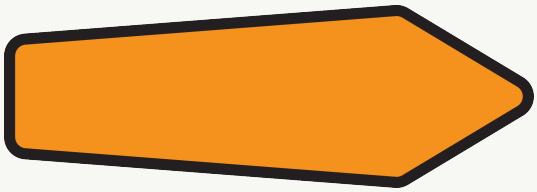

F24 · Temporary diversion direction

Färdriktning vid omledning

Follow the indicated direction for the temporary diversion. Orange diversion arrow points right.

Transportstyrelsen · official description




F25 · Lane temporarily ends

Körfält upphör

A lane is temporarily closed and another lane in your direction is available. Prepare to move safely as indicated. One of two lanes closes; move into the other lane in the same direction.

Transportstyrelsen · official description

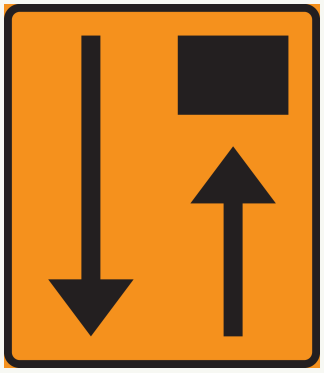

F26 · Lane temporarily closed

Körfält avstängt

A lane is temporarily closed with no other lane available in that travel direction. Read and follow the temporary routing rather than assuming an ordinary merge. An upward arrow meets a black closure block; a separate downward arrow marks opposing traffic.

Transportstyrelsen · official description

Markers and physical guidance



X1 · Sharp-change direction marker

Markeringspil

Turn sharply in the direction of the yellow arrow or arrows. Temporary use, including roadworks, has a red background. Yellow chevron points left on blue.

Transportstyrelsen · official description



X2 · Obstruction board

Markeringsskärm för hinder

An obstruction restricts the road, which may be partly or fully closed. Temporary boards have a red background. Horizontal board divided into alternating blue and yellow vertical blocks.

Transportstyrelsen · official description



X3 · Side-obstruction marker

Markeringsskärm för sidohinder, farthinder med mera

Pass on the side towards which the yellow diagonal stripes slope down. A temporary horizontal-striped version permits passage on either side. Diagonal yellow bands slope down towards the left on blue.

Transportstyrelsen · official description

Continue the learning



X3-2 · Side-obstruction marker

Markeringsskärm för sidohinder, farthinder

Pass on the side towards which the yellow diagonal stripes slope down. A temporary horizontal-striped version permits passage on either side. Two red boards have yellow diagonal bands sloping down towards opposite outer sides.

Transportstyrelsen · official description




X3-3 · Side-obstruction marker

Markeringsskärm för sidohinder, farthinder

Pass on the side towards which the yellow diagonal stripes slope down. A temporary horizontal-striped version permits passage on either side. Horizontal red and yellow bands; passage may be on either side.

Transportstyrelsen · official description

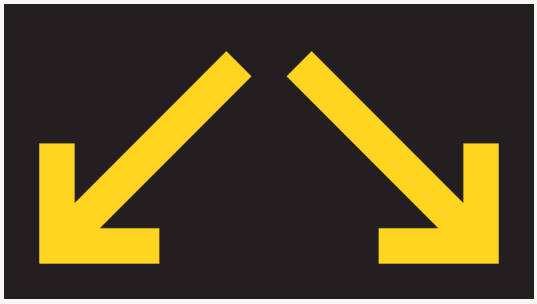

X5 · Illuminated pass-side arrow

Gul ljuspil eller ljuspilar

Pass on a side indicated by the yellow illuminated arrow or arrows. The arrows may flash. Two illuminated yellow arrows point down to opposite sides.

Transportstyrelsen · official description

Continue the learning



X6 · Temporary obstruction warning device

Särskild varningsanordning

A temporary obstruction restricts passage. Read the text identifying its cause. Temporary warning device reads Olycka: accident.

Transportstyrelsen · official description




X7 · Road barrier

Vägbom

The barrier indicates that the road is wholly or partly closed to traffic. Red-and-yellow road barrier.

Transportstyrelsen · official description

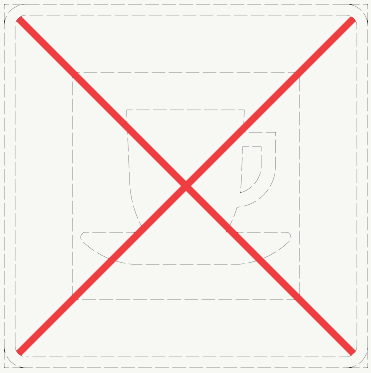


X8 · Temporary cancellation of direction information

Tillfällig stängning

The crossed-out destination instruction is temporarily not valid. Read the replacement route guidance. Red cross over temporarily cancelled destination information.

Transportstyrelsen · official description




X10 · Signpost visibility marker

Stolpmarkeringsanordning

This makes the supporting sign or traffic device easier to see. It is not a separate destination or priority instruction. Blue and white bands around a signpost.

Transportstyrelsen · official description

Authorised guard instructions

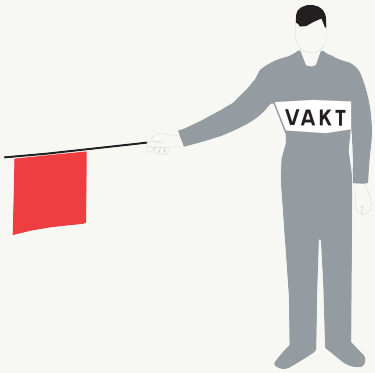

V1 · Traffic guard — stop

Stopp

Stop if the guard faces you. A red lamp is used in darkness; an authorised stop sign marked Vakt may also be used. Guard faces approaching traffic and holds a red flag sideways.

Transportstyrelsen · official description



V2 · Traffic guard — proceed

Kör fram

Proceed in the direction indicated by the guard's waving movement. A still image does not show the full gesture. Guard gestures to traffic; the complete movement is not reproduced in this still.

Transportstyrelsen · official description



V3 · Traffic guard identifier

Kännetecken

The guard identifier must be worn on the front and back. It identifies the role rather than giving a separate movement instruction. Garment identification panel bearing VAKT.

Transportstyrelsen · official description

Check the space beyond the tracks



Railway-crossing detail: the tracks are unoccupied but traffic is queued beyond them. Check that the whole vehicle can clear the railway before entering. The crop does not depict every sign, signal or barrier.

Worked decision. Traffic beyond a railway crossing stops while the barriers are still raised. You wait before the crossing. An open barrier is not proof that there is space to get clear. Later, at roadworks, you read the temporary lane instructions instead of following the old route from memory.

The crossing ID is on the back of the crossbuck. Use it only if available without returning to danger; see the official level-crossing guide. Trafikverket: level-crossing safety

Read the temporary road



Roadworks detail: machinery and cones alter the usable road edge. The scene illustrates observation and space, not a complete approved traffic-management layout. Follow the actual signs, signals and authorised directions.

Check your understanding

Knowledge check. Your engine fails while the car is on the tracks. Is the priority to protect the car or to evacuate and call for help?

Remember: Never enter a space unless you can clear it, and protect people first when the situation changes.

Review and self-assessment

Scenario: Your rural trip involves a slow vehicle, a motorway entry, temporary roadworks and a railway crossing with a queue beyond it.



Rural meeting detail: identify the visible road space and what an approaching vehicle changes.



Hidden-road detail: identify what remains out of view beyond the bend.

Use these rural details to describe what you can see and what remains uncertain.

Crossing and junction details



Ordinary rural-junction detail: assess possible joining traffic. This is separate from the motorway-entry detail shown later.



Railway detail: assess the queue and the available space beyond the tracks. No safe clearance is measured by the drawing.

Relate the details to the written trip. Explain what would change your decision.

Slower traffic and motorway entry



Slower-vehicle detail for the written trip: describe the observations and space needed before deciding whether to pass.



Motorway-entry detail for the written trip: describe how you would assess speed and traffic before joining.

Relate the details to the written trip. Explain what would change your decision.

Bring the journey together



Roadworks detail for the written trip: identify the information you need about the temporary route. No path is selected for you.

Identify where you might have to wait or change the route.

Keep a practice record

Record one situation in which impatience could change your judgement. Explain the risk and identify a practice or planning action that preserves your margin. Syllabus self-assessment, chapter 3 §3

Review after answering

M06-L01

Answer: (1) No. The view is limited; choose speed and position for that uncertainty. (2) Continue to a suitable permitted turning place or route, change direction safely and return for a right turn if allowed and safe. If no such route exists, choose another route or postpone. Do not make an immediate unsafe turnaround. (3) Dawn/dusk, animal habitats such as woodland edges and bushes, and fence endings/openings. Animals can also appear elsewhere and at other times.

M06-L02

Answer: No. Reassess and take the safest available action; do not treat finishing as more important than avoiding a collision. Plan with enough margin that abandoning is possible before committing.

M06-L03

Answer: (1) No. Use the lower applicable road/vehicle limit and reduce further for conditions. (2) Perception may have adapted to the motorway pace. Check the speedometer and current limit, then adapt to visibility and hazards. Feeling slow alone does not prove a faulty instrument or justify accelerating.

M06-L04

Answer: Evacuate people, get away from the railway and call 112. A disabled vehicle and a vehicle still able to drive through a barrier require different responses.

M06-R

Review guide: A complete overtaking path, a safe entry gap, current temporary instructions and clear space beyond the tracks matter more than maintaining progress.

Official references

Original references checked 5 October 2026; G6 additions checked 13 October 2026. Sign captions and artwork use the verified official asset register. Consult current guidance and applicable rules.

Traffic Regulation, chapter 3 §§14–15 and 30

https://www.riksdagen.se/sv/dokument-och-lagar/dokument/svensk-forfattningssamling/trafikforordning-19981276_sfs-1998-1276/

Trafikverket: wildlife

https://www.trafikverket.se/resa-och-trafik/trafiksakerhet/sakerhet-pa-vag/se-upp-for-vilt-pa-vagarna/

Slow vehicles and other traffic

https://www.trafikverket.se/resa-och-trafik/trafiksakerhet/sakerhet-pa-vag/sakerhet-pa-fyrhjuling-mopedbil-traktor-och-motorredskap/

Trafikverket: example of routing to a turning place

https://www.trafikverket.se/vara-projekt/projekt-i-stockholms-lan/e4-forbifart-stockholm/nyheter-for-e4-forbifart-stockholm/2025-02/avstangning-for-forberedande-arbeten/

Trafikverket: habitat example, page 9

https://bransch.trafikverket.se/contentassets/2f37f57af38d4d38b7a961b71b7e8988/gestaltningsprogram.pdf

Official references

Original references checked 5 October 2026; G6 additions checked 13 October 2026. Sign captions and artwork use the verified official asset register. Consult current guidance and applicable rules.

Trafikverket: speed and journey time

https://www.trafikverket.se/resa-och-trafik/trafiksakerhet/sakerhet-pa-vag/hastighetsgranser-pa-vag/hastighet-och-restid/

ODOT: speed perception and speedometer checks

https://www.oregon.gov/odot/dmv/pages/online_parent_guide_to_teen_driving/08_complex_driving_skills.aspx

Trafikverket: level-crossing safety

https://www.trafikverket.se/contentassets/e9665c2ef2134eb68306c0c45338f1ef/sakra-plankorsningar.pdf

Trafikverket: roadworks

https://www.trafikverket.se/resa-och-trafik/trafiksakerhet/sakerhet-pa-vag/sakerhet-vid-vagarbeten/

Syllabus self-assessment, chapter 3 §3

https://www.transportstyrelsen.se/TSFS/TSFS%202011_20.pdf

Road-sign illustrations: Transportstyrelsen. Each reference example links to its official description. Swedish names are official; English labels and explanations are editorial translations. Road scenes are simplified illustrations, not to scale.