

# NEPHELE

nephele.earth

## Ship-Integrated Sea Salt Aerosol Injection

Restoring Lost Cloud-Albedo Forcing via Exhaust-Plume-Entrained Seawater Spray  
Using Existing Scrubber Infrastructure on Commercial Vessels

WHITEPAPER | MARCH 2026 | V6.0

Prepared by Nephele • For Public Distribution

*This document describes a commercially viable, regulation-ready method for restoring the cloud-albedo cooling effect lost following IMO 2020 sulfur regulations, using benign saltwater aerosol delivered through existing ship exhaust infrastructure.*

# 1. Summary

For over a century, sulfur dioxide from marine fuel oxidized in the atmosphere to form sulfate aerosol that seeded brighter, more reflective marine clouds. The effect was measurable from space: bright linear cloud features, known as ship tracks, trailing behind vessels across every major ocean corridor.<sup>[27]</sup>

In January 2020, the IMO sulfur cap cut shipping sulfur emissions by approximately 80%.<sup>[42]</sup> This was an unambiguous public health success, but it also eliminated the sulfate aerosol that had been providing an unintended global cooling mechanism. The result was an immediate, measurable warming:  $+0.1$  to  $+0.2$  W/m<sup>2</sup> globally, equivalent to two to three years of additional greenhouse warming arriving all at once.<sup>[5,10,22,43]</sup>

Ships did not stop brightening clouds entirely. Even with cleaner fuel and scrubbers, post-2020 vessels still perturb clouds at approximately one-third of pre-2020 levels.<sup>[7]</sup> The cloud-brightening capacity was weakened, not eliminated.

Nephele supplements the remaining two-thirds gap with pure, atomized seawater. A bolt-on module installed above the scrubber exhaust stack injects seawater spray below a standard mist eliminator. Mist eliminators pass only sub-micron droplets, those in the CCN-active size range, into the warm, saturated post-scrubber exhaust plume.

What happens next is a core insight of this proposal. The injected droplets do not dry. Post-scrubber exhaust is warm and saturated with water vapor. Observational datasets from marine stratocumulus regions show that boundary layer relative humidity exceeds the NaCl deliquescence point of 75% for roughly 85 to 95% of the time at all altitudes below cloud base.<sup>[3,4]</sup> The seawater droplets remain as concentrated salt solution droplets for the large majority of their transit, concentrating during plume dilution but not crystallizing under the humidity conditions that prevail in target corridors. For the bulk of injected particles, there is no drying step, no deliquescence barrier, and no activation delay. The droplets that reach cloud base are effectively pre-activated cloud condensation nuclei, remaining activated at very low supersaturations typical of marine stratocumulus.

This bypasses a central challenge that has limited every other marine cloud brightening proposal: the spray-dry-loft-deliqesce-activate chain, where particles must evaporate to dry crystals, survive passive lofting over 30 to 60 minutes, re-absorb water at cloud base, and then activate.<sup>[24,30,40]</sup> Each step imposes losses. Nephele eliminates all of them.

There are over 4,000 scrubber-equipped vessels in operation today. Nephele restores ship tracks across the global ocean by supplementing weakened post-2020 aerosol with clean, environmentally benign sea salt delivered through the ship's own exhaust plume. We propose to develop this technology under IMO MEPC oversight, operating exclusively in designated open-ocean corridors with satellite and shipboard instrumentation-verified accountability.

## 2. The Gap

Prior to 2020, global shipping emitted roughly 10 Tg  $\text{SO}_2$  per year, approximately 13% of all anthropogenic sulfur dioxide emissions.<sup>[42]</sup> This  $\text{SO}_2$  oxidized in the marine boundary layer, primarily via aqueous-phase reaction with  $\text{H}_2\text{O}_2$  inside cloud droplets, to form sulfate aerosol that enhanced CCN concentrations by roughly an order of magnitude above the clean marine background, from approximately 100 to 120  $\text{cm}^{-3}$  to 500 to 1000+  $\text{cm}^{-3}$ .<sup>[2,33]</sup>

The 2020 sulfur cap reduced these emissions by approximately 80%. Diamond and Boss (2025) used shipping diversions around the Cape of Good Hope, where Houthi attacks on Red Sea shipping created a natural experiment in traffic density, to quantify the impact: the sulfur cap produced a ~67% reduction in cloud droplet number enhancement per unit of shipping.<sup>[7]</sup> Post-2020 ships retain approximately one-third of their pre-2020 cloud perturbation capacity. Ship tracks still occasionally form; "invisible" cloud perturbations, too subtle for satellite detection as linear features but statistically measurable when ship positions are known, remain substantial.<sup>[27]</sup>

The measured radiative forcing from this reduction is +0.06 to +0.2  $\text{W/m}^2$  globally.<sup>[5,10,22,43]</sup> Hansen et al. (2026) argue that the reduction of shipping aerosols is one component of a broader decline in aerosol cooling that, combined with a climate sensitivity of 4-5°C for doubled  $\text{CO}_2$ , is driving the extraordinary acceleration of sea surface temperature warming observed since 2023.<sup>[12]</sup> Detectable ship tracks account for only about 5% of the total aerosol indirect forcing from ship emissions; the majority comes from diffuse, corridor-wide perturbations.<sup>[44]</sup>

The engineering challenge is a supplement, not a full replacement. Post-2020 ships, natural background sea spray (~100  $\text{cm}^{-3}$ ), and the exhaust plume itself already provide a strong CCN foundation. Nephele closes the remaining two-thirds gap, approximately 270 to 600 additional CCN  $\text{cm}^{-3}$  within the plume cross-section, with pure seawater.

## 3. Plume Delivery Advantage

Every marine cloud brightening concept proposed to date follows the same pathway: spray seawater at sea level, evaporate the droplets to dry salt crystals, and hope that marine boundary layer turbulence lofts those crystals to cloud base within 30 to 60 minutes.<sup>[24,30,40]</sup> This pathway has multiple loss mechanisms.

Evaporative cooling of the air near the spray source creates negative buoyancy that actively suppresses vertical transport.<sup>[21]</sup> Dry crystals must survive gravitational settling, coagulation, and dry deposition during the long passive transit. At cloud base, dry NaCl crystals must first deliquesce, absorbing water and transitioning from solid to solution at ~75% RH, before they can activate as CCN. Each step introduces losses and uncertainty.

**Nephele's architecture eliminates this entire chain.**

### 3.1 Plume Transit: Stack to Cloud Base

**At the stack (0 m).** Post-scrubber exhaust exits at roughly 50 to 80°C and 100% relative humidity. Water vapor content is approximately 150 g/kg, compared to ambient air at about 10 g/kg. The injected seawater droplets enter this warm, saturated environment. They cannot evaporate because the surrounding air is already saturated. The plume is buoyant because it is warm relative to the ambient marine boundary layer.

**First 50 to 100 m.** The plume rises rapidly. Ambient air at roughly 18°C and 80% RH is entrained at the plume edges, but the plume core remains close to saturation because the moisture excess is so large (a 15:1 ratio of plume to ambient water vapor content). The plume is visible as a dense white condensation cloud because temperature mixing at the boundaries creates local supersaturation, the same physics that makes breath visible on a cold day. Droplets remain at roughly their original size. Plume diameter expands from roughly 3 m to 20 to 30 m.

**100 to 300 m.** Entrainment has diluted the plume significantly. The unmixed fraction is roughly 10 to 30%. Two competing effects govern RH: the plume is getting drier from entrainment of 80% RH air, but it is also cooling with altitude at the moist adiabatic lapse rate ( $\sim 6.5^\circ\text{C}/\text{km}$ ), which pushes RH back up. Net result: RH in the plume core remains above 85 to 90%, with 80 to 85% at the edges. Droplets at the plume edges begin to concentrate. A 1  $\mu\text{m}$  seawater droplet at 85% RH equilibrates to about 0.4  $\mu\text{m}$ . It has lost water, but its dissolved NaCl mass is unchanged. It is now a smaller, more concentrated droplet with lower settling velocity and higher solute-to-volume ratio.

**300 to 700 m (approaching cloud base).** The plume is thoroughly mixed with ambient air. RH is now set by the ambient MBL humidity profile, which in stratocumulus regions rises from about 80% at the surface toward saturation (100%) at cloud base. So as the plume dilutes and loses its own moisture identity, the ambient RH is *increasing* with altitude. The droplets that concentrated during mid-transit now slowly re-absorb water as RH climbs toward cloud base.

**At cloud base.** Supersaturation develops in rising air parcels. The droplets, which are concentrated NaCl solution rather than dry crystals, activate at very low supersaturations typical of marine stratocumulus. There is no solid-to-liquid transition, no deliquescence kinetics, and no wetting delay. They are already liquid and already carrying sufficient solute mass to serve as CCN without the kinetic barriers that dry crystals must overcome.

The full transit follows a V-shaped trajectory in concentration: most dilute at the stack, most concentrated during mid-transit as the plume mixes with drier ambient air, then diluting again as ambient RH rises toward cloud base. In stratocumulus regions, ambient MBL humidity exceeds the NaCl deliquescence point of 75.3% roughly 85 to 95% of the time.<sup>[3,4]</sup> Real plumes are turbulent and intermittent, with shear-driven filaments and transient mixing at the edges, and brief excursions below 75% RH cannot be categorically excluded. However, the mean-state humidity profile in the target regions strongly favors solution-phase persistence throughout transit. The mid-transit concentration is actually beneficial: smaller droplets have lower settling velocity and reduced coagulation probability, making them easier to transport and less likely to merge with neighbors during the remaining ascent.

## 3.2 Pre-Activated CCN

Köhler theory governs the critical supersaturation required for a solution droplet to activate as a CCN.<sup>[31]</sup> For dry crystals, this involves overcoming the deliquescence barrier (the solid-to-solution transition at  $\sim 75\%$  RH) and then growing past the critical wet diameter. For a solution droplet that is *already* past deliquescence, there is no barrier. The droplet activates the moment ambient supersaturation exceeds its critical value.

For NaCl solution droplets in the size range Nephele produces (0.3  $\mu\text{m}$  wet and above), the critical supersaturation is extremely low:  $S_c = 0.028\%$  for a 0.5  $\mu\text{m}$  droplet,  $S_c = 0.010\%$  for a 1.0  $\mu\text{m}$  droplet. Typical marine stratocumulus cloud base supersaturation is 0.1 to 0.3%. Every droplet above 0.3  $\mu\text{m}$  wet activates at the lowest supersaturations found in marine clouds. These droplets are effectively pre-activated: they are solution

droplets carrying sufficient solute mass that the supersaturation threshold for CCN activation is far below what marine stratocumulus routinely provides.

### 3.3 Thermal Lofting

The warm exhaust plume provides buoyant vertical transport. Initial vertical velocities at the stack are on the order of 5 to 15 m/s, decaying as entrainment reduces the temperature differential. Estimated transit time to cloud base (500 to 1000 m) is on the order of 5 to 15 minutes, depending on initial buoyancy flux, ambient stratification, and wind shear.<sup>[14]</sup> This is substantially faster than the 30 to 60 minutes required for passive MBL turbulent lofting in ambient MCB proposals, though the exact advantage depends on conditions that will be measured directly during the Phase 0 campaign. The settling velocity of a 3  $\mu\text{m}$  seawater droplet is approximately 0.3 mm/s, utterly negligible compared to plume updraft velocities. Even droplets that have concentrated to 0.35  $\mu\text{m}$  during mid-transit settle at roughly 4  $\mu\text{m/s}$ , which is functionally zero compared to any vertical air motion in the MBL.

### 3.4 Comparison to Ambient MCB Injection

The net effect of plume delivery is a substantially higher fraction of injected particles reaching cloud base as effective CCN. Ambient MCB injection must contend with evaporative cooling (which suppresses vertical transport at the source<sup>[21]</sup>), passive lofting losses over 30 to 60 minutes, complete drying to solid crystals, and deliquescence kinetics at cloud base. Conservative estimates of end-to-end delivery efficiency for ambient injection range from 1 to 10%. Based on the physical arguments in Sections 3.1 through 3.3, we hypothesize that Nephele's plume delivery achieves 70 to 95% delivery efficiency. This is the central testable claim of the proposal and the primary target of Phase 0 measurements. Even at the lower bound of this range, the improvement over ambient injection is roughly an order of magnitude. This delivery advantage is what makes the nozzle requirements tractable.

### 3.5 Sources of Uncertainty (to be resolved in Phase 0 testing)

The plume delivery advantage is the central physical claim of this proposal. It rests on several assumptions that are individually well-grounded but have not been directly measured in a ship exhaust plume carrying injected sea salt aerosol. The following uncertainties will be resolved by Phase 0 and Phase 1 measurements:

**RH variability in the plume.** The argument that droplets remain as solution depends on MBL humidity exceeding the NaCl deliquescence point ( $\sim 75\%$  RH) for the large majority of plume residence time. While observational datasets support this in stratocumulus regions<sup>[3,4]</sup>, real plumes experience turbulent intermittency, dry intrusion events, and diurnal decoupling that may create transient sub-75% excursions. Phase 0 will measure RH profiles within and around operating scrubber plumes directly.

**Plume coherence and rise rate.** Transit time depends on initial buoyancy flux, entrainment rate, ambient wind shear, and boundary layer stratification. The estimated 5- to 15-minute range is based on standard buoyant plume models<sup>[14]</sup>, but real ship plumes are subject to shear breakup, filamentation, and intermittent structure that smooth profiles do not capture. Phase 0 instrumentation (ship-mounted lidar, drone profiling) will characterize actual plume geometry and rise behavior.

**Delivery efficiency.** The hypothesized 70 to 95% delivery efficiency is derived from the combination of minimal drying losses, no deliquescence barrier, near-complete activation, and faster transport. Each factor is physically motivated but the compound

product has not been measured. Phase 0 will measure CCN concentration at multiple altitudes within the plume to directly constrain this number.

**Cloud response nonlinearity.** The Twomey effect is logarithmic in CCN concentration.<sup>[36]</sup> Adding CCN to an already-perturbed plume produces less brightening per particle than adding them to a clean cloud. Post-2020 ships still emit CCN at one-third of pre-2020 levels, so Nephele is adding particles to an already-perturbed plume. Phase 1 satellite analysis will quantify actual albedo response per unit of injected aerosol.

## 4. Prior Approaches

The marine cloud brightening field has spent decades searching for the perfect spray nozzle. This search has produced extraordinary science and zero deployed systems.

Salter's original design called for *billions* of micro-fabricated silicon nozzles.<sup>[30]</sup> Cambridge's Centre for Climate Repair is exploring superheated converging-diverging nozzles with shock-wave atomization. The University of Washington's effervescent nozzle work achieved a count median diameter of approximately 50 nm dry, requiring ~512 W per nozzle at 71% CCN-active fraction.<sup>[13]</sup> Scaling to the  $10^{15}$  CCN/s Wood criterion requires ~814 nozzles drawing ~417 kW, feasible on a research vessel but logistically challenging for unattended commercial operation.

All of these approaches share a common assumption: the nozzle must produce the right particle at the point of emission, because the particle then enters ambient air and must survive the full spray-dry-loft-activate chain. This assumption demands extraordinary nozzle precision. Nephele's plume delivery architecture removes the assumption. Because injected droplets stay as solution droplets and arrive effectively pre-activated at cloud base, the nozzle does not need to produce a narrow sub-100 nm dry distribution. It needs to produce droplets in the 0.3 to 3  $\mu\text{m}$  wet range, a far more achievable target for industrial spray hardware.

## 5. The Nephele Module

### 5.1 Architecture

The Nephele module is a self-contained bolt-on unit that mounts on top of the scrubber exhaust stack, above the scrubber's own mist eliminator. It does not touch, modify, or interfere with the scrubber. The scrubber continues to meet MARPOL Annex VI compliance entirely unaffected.

The module contains three components: an array of spray nozzles with splash impaction plates, a mist eliminator above them, and instrumentation/control electronics. Seawater is tapped from the scrubber seawater circuit. No additional intake or filtration is required.

### 5.2 The Mist Eliminator

A mist eliminator (demister pad) is a structure of thin wires or vanes through which gas flows freely. Typical void fraction: 97 to 99%.<sup>[1]</sup> The capture mechanism is inertial impaction, not filtration. Gas weaves around wires; large droplets cannot follow the turns and impact the wires. Small droplets follow the gas streamlines and pass through. Sub-micron particles pass with near-100% efficiency. Particles above  $\sim 3 \mu\text{m}$  are captured with high efficiency.<sup>[34]</sup> Mist eliminators are mature, standard technology on scrubber-equipped ships.

Pressure drop is negligible: 0.2 to 1.0 inches of water column ( $\sim 50$  to  $250 \text{ Pa}$ ).<sup>[9]</sup> A marine scrubber already imposes several thousand Pa of backpressure. Nephele's additional mist eliminator adds perhaps 5 to 10% to existing system pressure drop, well within engineering margins. The mist eliminator is the same off-the-shelf component already installed in every marine scrubber. Nephele's unit is a replaceable cassette that can be removed during routine port calls.

### 5.3 Nozzle and Splash Atomization Strategy

Nephele's injection architecture is designed to accommodate multiple atomization technologies as they mature. The nozzle is the replaceable commodity; the platform (mounting, power, control, verification instrumentation, regulatory positioning, fleet contracts) is the asset.

Near-term deployment uses commercially available air-assist nozzles paired with splash impaction plates. Air-assist nozzles are catalog industrial components with decades of marine service history. They produce a broad polydisperse spray in the  $5$  to  $50 \mu\text{m}$  wet range. Without secondary atomization, less than 1% of this output is useful for CCN production (Section 6.4). The splash impaction plate is the critical secondary stage.

Splash plate atomization is a well-established industrial technology. It is the standard nozzle type in kraft recovery boilers, where black liquor is sprayed onto a flat plate to form a wide sheet of droplets ranging from less than  $0.1 \text{ mm}$  to over  $5 \text{ mm}$ .<sup>[17,32]</sup> When a spray droplet impacts a wetted plate at high Weber number, the spreading film becomes unstable via Rayleigh-Taylor instability, forming crown structures with fingers that pinch off as secondary daughter droplets.<sup>[6,41]</sup> The daughter droplet diameter scales approximately as  $We^{-1/4}$  relative to the parent, where  $We$  is the impact Weber number.<sup>[38]</sup>

For a  $15 \mu\text{m}$  parent droplet impacting at  $80 \text{ m/s}$  (typical air-assist exit velocity), the Weber number is approximately 1,300. At  $We^{-1/4}$  scaling, daughter droplets are roughly



6× smaller than parents, yielding a daughter CMD of approximately 2  $\mu\text{m}$  wet for Dv50-sized parents and approximately 1  $\mu\text{m}$  for CMD-sized parents. For a central daughter CMD estimate of 2  $\mu\text{m}$ , approximately 72% of daughter droplets by number pass the mist eliminator (compared to 16.5% of the original parent spray). The splash process also multiplies particle count: each parent impact produces on the order of 10 to 20 daughter fragments.<sup>[6,41]</sup> The combined effect of count multiplication and size shift is approximately 30× more useful CCN output than bare nozzles alone.

Key operational concerns with splash plates in continuous marine service include: (1) film accumulation on the plate surface from continuous spray, which changes impact dynamics (thin films promote splashing, thick films inhibit it<sup>[37]</sup>); (2) salt crystal buildup as seawater evaporates on the plate; (3) corrosion from continuous seawater contact. All three are managed by the replaceable cassette design: the splash plate is swapped during routine port calls alongside the mist eliminator, on a maintenance cycle measured in weeks to months, not years. Plate material (Inconel 625 or ceramic) and surface texture are design variables to be optimized during Phase 0 hardware development.

As effervescent, convergent-divergent, or other precision nozzle technologies mature for continuous marine operation, they plug directly into the same mounting frame and seawater supply with minor hardware adjustments. The platform is nozzle-agnostic by design.

## 5.4 Exhaust Plume Does Not Further Atomize Droplets

Secondary breakup occurs when aerodynamic Weber number exceeds  $We_{crit} \approx 12$ .<sup>[11]</sup> For post-scrubber exhaust ( $\rho_{gas} \approx 0.9 \text{ kg/m}^3$ ,  $v_{rel} \approx 15 \text{ to } 30 \text{ m/s}$ ,  $\sigma_{water} \approx 0.072 \text{ N/m}$ ), a 50  $\mu\text{m}$  droplet gives  $We \approx 0.14 \text{ to } 0.56$ , far below breakup threshold. What the nozzle and splash plate produce and the mist eliminator passes is what enters the boundary layer.

## 5.5 Installation, Maintenance, and Cost

Scrubber systems are subject to regular MARPOL Annex VI inspection. The scrubber stack exit is routinely accessed for maintenance. Installation of the Nephele module can be performed during a scheduled port call. Nozzle replacement is a hand-tool operation. Mist eliminator and splash plate cassette swap takes less than an hour.

Estimated per-vessel installation cost: approximately \$250,000 including hardware, installation, and commissioning. For context, a scrubber installation costs \$2 to 8 million. Dedicated cloud brightening vessels cost \$10M+ each.



## 6. Particle Physics and CCN Production

### 6.1 Wet Droplet to Dry Crystal: Size Relationship

When a seawater droplet fully evaporates, the dry NaCl crystal is smaller than the original droplet by a factor determined by salinity and density. For seawater at 3.5% salinity ( $\rho_{sw} = 1025 \text{ kg/m}^3$ ,  $\rho_{NaCl} = 2160 \text{ kg/m}^3$ ):  $d_{dry}/d_{wet} = (\rho_{sw} \times w_s / \rho_{NaCl})^{1/3} \approx 0.255$ . A 3  $\mu\text{m}$  droplet dries to  $\sim 765 \text{ nm}$ . A 1  $\mu\text{m}$  droplet dries to  $\sim 255 \text{ nm}$ . A 0.5  $\mu\text{m}$  droplet dries to  $\sim 128 \text{ nm}$ .

**However, in Nephele's architecture, the droplets do not fully dry.** As described in Section 3, the marine boundary layer RH remains above the NaCl deliquescence point for the large majority of transit time. The droplets equilibrate to concentrated solution droplets whose size depends on ambient RH: at 80% RH, a 1  $\mu\text{m}$  seawater droplet equilibrates to  $\sim 0.35 \mu\text{m}$ ; at 90% RH, to  $\sim 0.5 \mu\text{m}$ . At cloud base ( $\sim 99\%$  RH), the droplets are near their original injected size. The dry crystal diameter is relevant only as a measure of the solute mass each droplet carries, and all droplets above  $\sim 0.3 \mu\text{m}$  wet carry more than enough solute for CCN activation.<sup>[31]</sup>

### 6.2 NaCl vs. Sulfate as CCN

Sodium chloride has a hygroscopicity parameter ( $\kappa$ ) of 1.28, compared to 0.61 for ammonium sulfate.<sup>[31]</sup> This means a smaller NaCl particle activates at a given supersaturation. Additionally, NaCl solution droplets arriving at cloud base are already past deliquescence, whereas sulfate crystals from the pre-2020 system had to nucleate, survive atmospheric transport, and deliquesce before activation.

### 6.3 Controllability: The Strategic Advantage

Pre-2020 sulfate cloud brightening was an entirely uncontrolled side effect of burning dirty fuel.  $\text{SO}_2$  left the stack as a reactive gas and entered a complex atmospheric chemistry chain: gas-phase oxidation by OH radicals (slow, daytime only), aqueous-phase oxidation by  $\text{H}_2\text{O}_2$  and  $\text{O}_3$  inside cloud droplets (fast but intermittent), nucleation of new particles or condensation onto existing ones, and eventual activation as CCN. Nobody controlled the particle size distribution, where the conversion happened, whether receptive clouds were overhead, or whether the resulting aerosol would brighten or darken the clouds. The sulfate system was a brute-force atmospheric reactor running unsupervised across the entire ocean.

Sea salt aerosol does none of this. NaCl is chemically inert in the marine boundary layer. It does not oxidize, does not nucleate new particles through gas-phase chemistry, and does not react with atmospheric oxidants to form secondary aerosol. A NaCl solution droplet injected at the stack is the same NaCl solution droplet that arrives at cloud base. Its size, solute mass, and CCN activation properties are known at the point of injection and do not change during transit.

This means Nephele's forcing is predictable, tunable, and verifiable in a way that sulfate forcing never was. We can turn injection on or off in response to real-time satellite cloud data. We can modulate injection rate based on observed meteorological conditions. We can deactivate in regions where cloud response is unfavorable. The pre-2020 sulfate system had none of these capabilities. Our per-particle forcing may be somewhat smaller than the theoretical maximum, because we are not exploiting the atmosphere as a free particle factory. But we know exactly what we are putting into the air, exactly where, and exactly when. That tradeoff, less raw power but far greater precision and

accountability, is what makes ship track restoration a governable climate intervention rather than an uncontrolled accident of fossil fuel combustion.

## 6.4 Per-Ship CCN Budget

The central question is: how does Nephele's CCN output compare to what a pre-2020 ship was delivering to cloud base? Both sides of this comparison involve multiple uncertain parameters. We walk through each step explicitly below.

**Pre-2020 sulfate system: fundamentally different and harder to quantify.** A direct particle-for-particle comparison between Nephele and the pre-2020 sulfate system is misleading, because the two systems produce CCN through entirely different mechanisms. Nephele injects finished solution droplets. The pre-2020 system emitted SO<sub>2</sub> gas, which the atmosphere then converted to sulfate particles through complex, uncontrolled chemistry over hours to days.

A pre-2020 vessel burning HFO at 2.7% sulfur emitted approximately 25 kg/hr SO<sub>2</sub>. Within the ship track timescale of several hours, roughly 5 to 15% of this SO<sub>2</sub> converted to sulfate aerosol. If all of this sulfate nucleated new 150 nm particles (ammonium sulfate density 1770 kg/m<sup>3</sup>), the equivalent particle production rate would be approximately  $3.3 \times 10^{14}$  particles/s. But this is an upper bound, not a realistic estimate of new particle formation.

SO<sub>2</sub> conversion to sulfate occurs via two pathways. Gas-phase oxidation by OH radicals (approximately 30% of conversion) can nucleate new particles, but in the polluted marine boundary layer, most of this sulfate condenses onto pre-existing particles rather than forming new ones. Aqueous-phase oxidation by H<sub>2</sub>O<sub>2</sub> and O<sub>3</sub> inside cloud droplets (approximately 70% of conversion) adds sulfate mass to existing cloud droplets but does not create new CCN. The fraction of converted sulfate that actually nucleated new particles is poorly constrained and varied along every ship track.

Additionally, combustion produced roughly 1.5 kg/hr of primary particulate matter (black carbon, organic carbon, primary sulfate, ash) with CMD approximately 100 nm. These particles did not depend on atmospheric conversion, but their delivery to cloud base and activation efficiency are themselves uncertain (estimated 10 to 20% delivery, 50 to 70% activation).

**Observational ground truth.** Rather than attempting to close a bottom-up particle budget with poorly constrained parameters, we anchor the comparison to direct measurements. Diamond and Boss (2025) measured the actual cloud response to the IMO 2020 sulfur cap: a ~67% reduction in cloud droplet number enhancement per unit of shipping.<sup>[7]</sup> This measurement integrates all pathways: primary PM, gas-phase nucleation, condensational growth, aqueous-phase modification, and cloud processing. It is the empirically measured deficit that Nephele aims to fill.

**Traditional hardware.** A single air-assist nozzle operating at 1 L/min ( $1.67 \times 10^{-5}$  m<sup>3</sup>/s) produces a polydisperse spray with a volume median diameter of approximately 15 μm and geometric standard deviation  $\sigma_g$  of approximately 1.8.<sup>[25]</sup> For a log-normal distribution, the count median diameter (CMD) =  $D_{v50} \times \exp(-3 \ln^2 \sigma_g) = 15 \times \exp(-3 \times 0.587^2) = 15 \times 0.356 \approx 5.3$  μm. The mean droplet volume is  $(\pi/6) \times \text{CMD}^3 \times \exp(4.5 \ln^2 \sigma_g) = 3.73 \times 10^{-16}$  m<sup>3</sup>. Total droplet production: flow rate / mean volume  $\approx 4.5 \times 10^{10}$  droplets/s per nozzle.


The mist eliminator passes droplets below approximately 3 μm wet. For a log-normal with CMD = 5.3 μm and  $\sigma_g = 1.8$ , the cumulative fraction below 3 μm is approximately 16.5% by number. Without secondary atomization, each nozzle delivers roughly  $7.4 \times 10^9$  droplets/s past the eliminator. At 100 nozzles with 85% plume delivery:

approximately  $6 \times 10^{11}$  effective CCN/s per vessel. This is orders of magnitude below any estimate of pre-2020 per-ship CCN. Air-assist nozzles alone, without secondary atomization, are insufficient.

**Traditional hardware with splash atomization.** At 50% splash mass fraction and approximately 15 daughter fragments per parent impact<sup>[6,41]</sup>, total particle count increases by roughly 8×. The daughter distribution is centered near 2 μm wet CMD (from  $We^{-1/4}$  scaling<sup>[38]</sup>), so approximately 72% of daughter droplets pass the mist eliminator, compared to 16.5% of the original parent spray. The combined effect of count multiplication and size shift yields approximately 30× more useful CCN than bare nozzles. With splash atomization, 100 nozzles at 1 L/min, and 85% plume delivery, the effective CCN flux at cloud base is approximately  $2.1 \times 10^{13}$  particles/s per vessel.

**The honest assessment.** Nephele's splash atomization system delivers approximately  $2.1 \times 10^{13}$  CCN/s to cloud base (range 1.7 to  $2.3 \times 10^{13}$  for plume delivery of 70 to 95%). Whether this represents 10% or 50% of the pre-2020 per-ship cloud perturbation depends on how much of the pre-2020 signal came from new particle formation versus modification of existing particles, a question that published literature has not resolved and that bottom-up calculations cannot answer reliably. What is measurable is the cloud response itself. Phase 0 will measure the actual albedo perturbation from a Nephele-equipped vessel and compare it directly to the pre-2020 ship track literature, bypassing the particle budget uncertainty entirely. The splash impaction stage is not optional; it is load-bearing for these numbers. Without it, the system delivers less than 1% of even the most conservative pre-2020 CCN estimate.

**Bounding the pre-2020 comparison.** Although a precise particle-for-particle comparison is not possible, we can bound the pre-2020 per-ship effective CCN rate at cloud base. The lower bound is set by primary particulate matter alone: 1.5 kg/hr of primary PM at CMD 100 nm gives approximately  $5 \times 10^{14}$  particles/s at the stack, of which perhaps 10 to 20% reach cloud base (consistent with the ~10% CCN/CN ratio measured by Hudson et al. 2000[16]) with 50 to 70% activating as CCN, yielding approximately  $3 \times 10^{13}$  effective CCN/s. The upper bound adds a generous estimate of secondary sulfate nucleation: if 10% of the converted sulfate nucleates new particles (rather than condensing on existing ones) with 15 to 20% delivery and 60 to 70% activation, the total rises to approximately  $10^{14}$  effective CCN/s. This roughly half-order-of-magnitude uncertainty range ( $3 \times 10^{13}$  to  $10^{14}$ ) is shown as the shaded band in Figure 1, Panel B. Nephele's central estimate of  $2.1 \times 10^{13}$  falls at the lower edge of this band, meaning that with current hardware Nephele may deliver a comparable number of new CCN to what primary PM alone provided pre-2020, but likely falls short of the total pre-2020 cloud perturbation including secondary sulfate contributions. This bottom-up range is informed by measured ship emission factors (Hobbs et al. 2000[15]) and must be consistent with the observed ~67% cloud response reduction measured by Diamond and Boss (2025)[7]. This is the honest starting point. Phase 0 will measure whether Nephele's CCN flux produces a detectable cloud response.

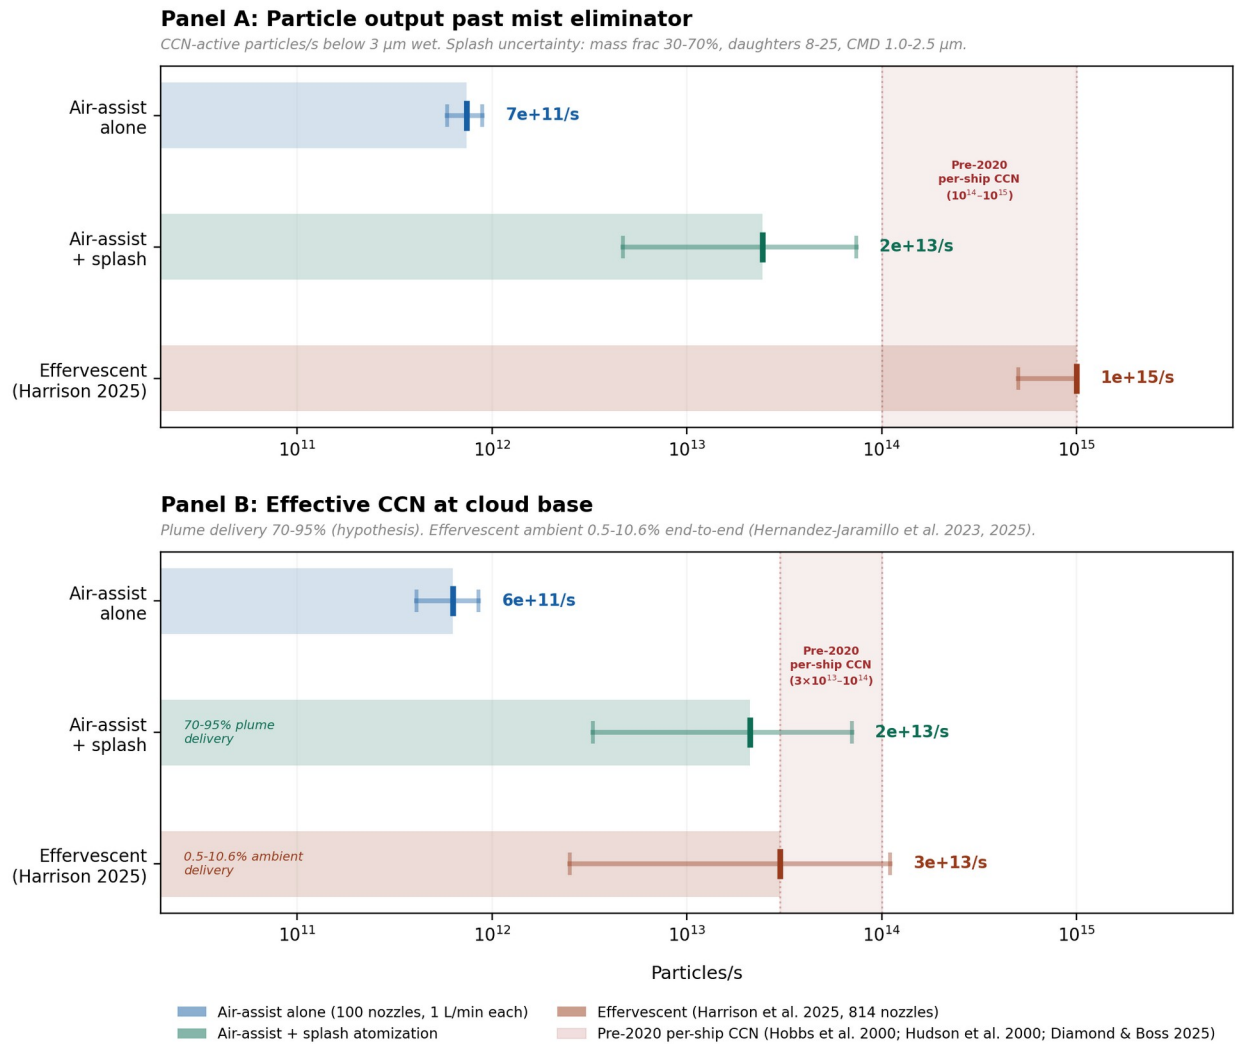

*Figure 1. Panel A: CCN-active particle output past the 3  $\mu\text{m}$  mist eliminator. Effervescent nozzles produce  $\sim 40\times$  more useful particles because nearly all output is sub-100 nm. Splash uncertainty reflects parameter ranges (mass fraction 30-70%, daughter count 8-25, daughter CMD 1.0-2.5  $\mu\text{m}$ ). Pre-2020 per-ship CCN band ( $10^{14}$  to  $10^{15}$ ) derived from Hobbs et al. (2000) total CN measurements with  $\sim 10\%$  CCN/CN ratio (Hudson et al. 2000); upper end reflects dirtier fuel (2-3.5% S) than fleet average (2.7% S). Panel B: Effective CCN at cloud base after delivery losses. Nephele plume delivery (70-95%, hypothesis) preserves most output. Effervescent ambient delivery (0.5-10.6% end-to-end; Hernandez-Jaramillo et al. 2023, 2025) reflects passive MBL lofting and activation. Pre-2020 per-ship effective CCN band ( $3\times 10^{13}$  to  $10^{14}$ , bottom-up estimate). Lower bound: primary PM only reaching cloud base. Upper bound: includes secondary sulfate nucleation. Informed by measured emission factors (Hobbs et al. 2000) and constrained by the observed  $\sim 67\%$  cloud response reduction (Diamond and Boss 2025).*

An important distinction: high delivery efficiency does not automatically translate to high local CCN concentration at cloud base. The plume disperses laterally as it rises, spreading injected particles across a widening cross-section. However, pre-2020 ship tracks formed through the same dispersal process. What matters for cloud response is the change in droplet number concentration relative to the background within the plume footprint, and the pre-2020 literature confirms that plume-dispersed CCN produce measurable albedo perturbations across track widths of 10 to 50 km.<sup>[27,44]</sup>

## 6.5 Current Hardware Limits and the Path to Parity

We are transparent about this: the  $2.1 \times 10^{13}$  CCN/s estimate depends on splash atomization performing as modeled. Without it, air-assist nozzles alone deliver less than 1% of even the most conservative pre-2020 estimate. The splash impactation stage is unproven in continuous marine operation. The daughter droplet size distribution, splash mass fraction, and fragment count assumed here are based on published splash dynamics literature<sup>[6,38,41]</sup>, not on measurements from a Nephele prototype. Phase 0 hardware development (Section 15.1) will build and test splash impactation plates alongside the measurement campaign.

Even with splash, off-the-shelf air-assist nozzles are unlikely to reach full parity with pre-2020 cloud perturbation levels. Closing the gap requires nozzle technology that puts substantially more output mass into the sub-3  $\mu\text{m}$  wet range. Effervescent nozzles, de Laval flash atomization, further optimized splash geometries, and other approaches are under active development. These exist in laboratory settings but have not been demonstrated for continuous unattended marine operation. Maturing them to fleet-ready reliability is an engineering program, not a physics problem.

**This is precisely why IMO recognition of ship track restoration matters now, before the hardware reaches parity.** If the MEPC recognizes verified radiative forcing from ship-integrated sea salt injection as an eligible activity under the Net-Zero Framework, it creates a direct commercial incentive for the maritime and industrial spray engineering sectors to develop nozzle hardware optimized for CCN production in marine exhaust environments. The market for such hardware does not currently exist because the regulatory category does not exist. Nephele's platform (mounting, verification instrumentation, fleet integration, regulatory positioning) is ready for improved nozzles the moment they are available. IMO recognition creates the market that funds the hardware development that closes the gap.

In the interim,  $2.1 \times 10^{13}$  CCN/s is not zero. Combined with the ship's own residual post-2020 combustion aerosol, a Nephele-equipped vessel produces a measurable, verifiable increase in cloud perturbation. Whether this is sufficient to produce a detectable ship track is the central question Phase 0 will answer. That measurement, not a bottom-up particle budget, is the test that matters.

## 7. Why Don't Scrubbers Already Do This?

They partially do. Every scrubber-equipped vessel is already emitting sub-micron aerosol that perturbs clouds at approximately one-third of pre-2020 levels.<sup>[7]</sup> IMO 2020 capped sulfur in fuel, not at the scrubber outlet. There are simply fewer sulfate aerosols being generated by combustion. The scrubber's mist eliminator captures coarse washwater droplets but freely passes sub-micron particles; it functions as a particle size low-pass filter. Nephele exploits this same physics, deliberately injecting seawater spray below a mist eliminator to produce a controlled flux of CCN-active solution droplets.

## 8. Exhaust Chemistry and HCl

Sea salt aerosol in the marine atmosphere undergoes chloride depletion through reaction with sulfuric and nitric acid, releasing HCl. In the concentrated exhaust plume, residual  $\text{SO}_2$  and  $\text{NO}_x$  could accelerate this. Three mitigations: (1) post-scrubber  $\text{SO}_2$  is already substantially reduced to MARPOL compliance levels; (2) any HCl disperses into open atmosphere at levels orders of magnitude below health concern; (3) chloride-depleted particles convert to sodium sulfate or sodium nitrate, both hygroscopic and

still CCN-active, albeit at lower  $\kappa$ . The extent of in-plume chloride depletion is an open question for pilot testing.

## 9. Verification, Reporting, and Accountability

### 9.1 The Mist Eliminator Cassette as Verification Instrument

The replaceable cassette carries a time-integrated record of operation. Salt crystal deposits reflect cumulative throughput; chemical composition reflects exhaust stream constituents. A sulfate assay gives a physical, tamper-resistant confirmation of precisely the concentration of sulfate emitted during a given time. One cassette provides two verification layers: sea salt loading confirms saltwater throughput, sulfate assay verifies emissions compliance.

This has standalone value to the IMO MEPC for emissions verification of the 4,000+ scrubber fleet independent of ship track restoration.

### 9.2 Satellite Verification

Primary: CERES broadband radiative flux measurements<sup>[23,26]</sup> with coincident MODIS/VIIRS cloud retrievals and statistical inference based on Phase 1 pilot data and in-situ shipboard instrumentation.<sup>[28]</sup> Secondary: machine-learning ship track detection cross-referenced with AIS vessel tracking.<sup>[39]</sup> Tertiary: Diamond (2023) counterfactual statistical methods for corridor-scale forcing estimation.<sup>[8]</sup>

### 9.3 Off Switch

Sub-micron sea salt aerosol in the MBL has atmospheric residence time of hours to days.<sup>[29]</sup> Stop injection and cloud brightening ceases within 24 to 48 hours. No persistent atmospheric modification. No stratospheric loading. No multi-year commitment. Cessation authority is unconditional and retained by the MEPC, flag states, and port states.

## 10. What This Is Not

**Not planetary-scale geoengineering.** Ship track restoration returns a pre-existing forcing that shipping itself produced for decades and abruptly removed in 2020. We aim to restore that effect, not overreach it.

**Not new science.** The Twomey effect has been studied since 1977.<sup>[36]</sup> Ship tracks since 1966. Salt aerosol CCN activation is well-characterised. Every mechanism in this proposal has been published and replicated.

**Not permanent.** Stop injecting and the effect vanishes within 48 hours. No other climate intervention has a faster off switch.

**Not sulfur.** We replace a harmful pollutant with a naturally occurring, ecologically benign substance that is a more effective CCN ( $\kappa_{\text{NaCl}} \approx 1.28$  vs.  $\kappa_{\text{sulfate}} \approx 0.61$ ), and far more predictable and controllable.<sup>[31]</sup>

**Not unregulated.** Nephele proposes to operate exclusively under IMO MEPC oversight, on registered commercial vessels, in designated open-ocean corridors. Modules are programmatically deactivated in coastal waters, ports, and territorial seas.

**Not encouraging dirty emissions.** Nephele aims to develop the capacity to replace pre-2020 ship track strength entirely, meaning we will need combustion-generated aerosol. We welcome and encourage stricter fossil fuel emissions regulations.

## 11. Advantages Over Dedicated Cloud Brightening Proposals

| Parameter                           | Dedicated MCB Systems                     | Nephele (Ship Track Restoration)                     |
|-------------------------------------|-------------------------------------------|------------------------------------------------------|
| <b>Vessel fleet</b>                 | Purpose-built spray ships                 | 4,000+ existing scrubber vessels                     |
| <b>Spray system</b>                 | Precision sub- $\mu$ m nozzles            | Air-assist nozzles + splash plates + mist eliminator |
| <b>Delivery mechanism</b>           | Ambient MBL lofting (1 to 10% efficiency) | Exhaust plume (70 to 95% efficiency, hypothesized)   |
| <b>Particle state at cloud base</b> | Dry crystal (must deliquesce + activate)  | Effectively pre-activated solution droplet           |
| <b>Power source</b>                 | Dedicated generators                      | Existing ship engine                                 |
| <b>Seawater supply</b>              | Dedicated pumps/intakes                   | Existing scrubber circuit                            |
| <b>Deployment timeline</b>          | Years to build fleet                      | Months to retrofit                                   |
| <b>Per-unit cost</b>                | \$10M+ per vessel                         | ~\$250K per module                                   |
| <b>Regulatory pathway</b>           | Undefined                                 | IMO MEPC oversight pathway defined                   |
| <b>Verification</b>                 | Satellite + in-situ                       | Cassette + satellite + in-situ                       |



## 12. Regulatory Pathway

### 12.1 IMO Net-Zero Framework

The IMO Net-Zero Framework was approved in principle at MEPC 83 in April 2025, with formal adoption adjourned at the extraordinary session in October 2025 (vote: 57 to 49 to defer). Entry into force is expected no earlier than March 2028.<sup>[18]</sup> Revenue flows into the IMO Net-Zero Fund, mandated to reward zero and near-zero emission technologies.<sup>[19]</sup>

### 12.2 ZNZ Definition

Regulation 31.19 of draft revised MARPOL Annex VI defines ZNZs as "zero or near-zero GHG emission technologies, fuels and/or energy sources."<sup>[20]</sup> The definition explicitly includes "technologies" as a standalone category. The ZNZ guidelines remain under development as of March 2026; ten new supporting guidelines were identified at MEPC 83.<sup>[18]</sup> The guidelines gap is Nephele's window.

### 12.3 Argument for Inclusion

Nephele aims to openly develop regulations with the IMO before deploying tests of any kind, operate only in open ocean, and publicly share findings.

Our case: (1) the net-zero framework measures climate impact, not fuel chemistry; (2) precedent exists for non-fuel technologies;<sup>[18]</sup> (3) the IMO itself created the specific cooling gap we aim to fill; (4) the Fund's mandate encompasses "environmental and climate protection, adaptation and resilience building."<sup>[19]</sup>

### 12.4 What We Need from the MEPC

**Option A (preferred):** Explicitly include "sea-salt aerosol ship track restoration" as a named eligible ZNZ technology. **Option B:** Define ZNZ eligibility broadly enough to encompass any ship-installed technology producing verified net negative radiative forcing. **Option C (fallback):** Create a separate Fund disbursement category under the climate protection mandate. All three require no amendments to draft MARPOL Annex VI.

### 12.5 MEPC Oversight as Strategic Position

The proposed hardware is not proprietary. Satellite data is public. Our moat is regulatory: the institutional relationship with the MEPC, the approved verification methodology, the track record of auditable operations, and the trusted-operator status from helping write the rules and operating transparently under them.

## 13. Revenue Model

### 13.1 Primary revenue: IMO Net-Zero Fund Disbursements

The IMO Net-Zero Framework, once formally adopted and operational from 2028, will collect revenue through mandatory GHG pricing contributions from non-compliant vessels and disburse those funds as rewards to ships operating zero or near-zero emission technologies. The fund is projected to generate \$10–15 billion annually in its initial years of operation<sup>[35]</sup>.

The ICS draft ZNZ reward guidelines propose a reward rate expressed as US\$ per tonne of CO<sub>2</sub>eq avoided, calculated on a lifecycle basis. The specific dollar rate remains to be defined in guidelines targeted for adoption no later than 2027. This is the payment unit Nephele expects to operate within, subject to one critical precondition: the IMO must formally adopt a methodology for converting verified radiative forcing, measured in W/m<sup>2</sup>, into CO<sub>2</sub>eq avoided. This conversion is scientifically grounded in the same peer-reviewed literature that quantifies the warming effect of IMO 2020, and Nephele will actively contribute to its development. Establishing this equivalence methodology is a core objective of Nephele's MEPC engagement strategy.

Once the conversion methodology is adopted, the payment flow is straightforward. Verified radiative forcing from each participating vessel, measured via the satellite attribution pipeline described in Section 9, is converted to CO<sub>2</sub>eq avoided, multiplied by the agreed reward rate, and disbursed by the IMO Net-Zero Fund on an annual reporting cycle. Nephele invoices the Fund for verified forcing delivered across its fleet, retains a contracted margin, and remits the balance to participating shipping operators as compensation for operating the injection equipment. The margin, likely a negotiated percentage defined per operator contract, offsets a portion of the shipping company's GHG compliance costs under the same framework.

Each vessel generating verified radiative forcing equivalent should produce [tbd] per year in fund disbursements; this figure is the variable that depends on the CO<sub>2</sub>eq conversion rate and the agreed reward level per tonne, both of which will be determined through the guideline process Nephele is actively participating in. Projections at scale will be developed as those parameters are defined. What is already knowable is the structure: revenue scales linearly with verified fleet size, cost structure is largely fixed once the verification infrastructure is built, and margins improve with scale.

### 13.2 Interim funding

NZF disbursements begin no earlier than 2029. Nephele's path to that point relies on sources of non-dilutive and low-dilution capital. First, we will seek grant funding: ARIA's Exploring Climate Cooling program, Innovate UK, and philanthropic climate foundations represent the most likely near-term sources, with realistic aggregate potential of \$1m+ without equity dilution. Second, pre-commercial shipping partnerships: establishing relationships and pilot agreements with scrubber-equipped operators before 2029 generates no fund revenue but creates the track record, installed base, and verified dataset that makes Nephele's day-one commercial position defensible. Third, the continued professional income of the Nephele team in the near term removes pressure to raise dilutive capital prematurely.

Nephele is not a massively capital-intensive business. Hardware per vessel is approximately \$250,000, as mentioned in section 5.5. The infrastructure (satellite

attribution pipeline, data registry, instrumentation, spray hardware , can rapidly scale across the global shipping fleet. The primary cost of the business in its early years is people and the Phase 0/1 measurement campaigns, both of which are grant-fundable.

### **13.3 Compliance verification: an independent revenue stream**

The Nephele cassette, described in Section 9.1, carries a tamper-resistant physical record of scrubber operation: salt crystal deposits confirm aerosol throughput and a sulfate assay independently verifies the exhaust stream's SO<sub>2</sub> concentration during the cassette's operating period. This is relevant not only to Nephele's ship track restoration activity but to the broader challenge of scrubber emissions verification across the global fleet.

MARPOL Annex VI requires scrubber-equipped vessels to demonstrate compliance with sulfur emission limits, but current verification relies primarily on onboard electronic logging with periodic port state control inspections, a system with known monitoring gaps. The cassette provides a physical, chemistry-based verification record that is independent of onboard electronics, tamper-evident by nature, and recoverable post-voyage. This has standalone value to classification societies, flag states, and the IMO as a verification instrument for the 4,000+ scrubber-equipped vessels operating today, entirely independent of ship track restoration.

The commercial model for this revenue stream can be developed separately, but the outline is straightforward: Nephele manufactures and supplies easily-removable, tamper-resistant cassettes to scrubber operators on a subscription basis, retrieves and analyzes them on a defined cycle, and provides verified emissions records to operators, classification societies, or flag state authorities as required. This business generates revenue from the moment cassettes are in operation, well before fund disbursements begin, and is fundable through the same grant and partnership pathways as the core ship track restoration activity.

## 14. Pilot Program

### 14.1 Phase 0: Measurement Campaign and Hardware Development

Phase 0 has two parallel tracks. The first is a measurement campaign to quantify CCN concentration in post-2020 scrubber-equipped ship plumes and compare to indirect measurements and statistical estimates in literature. Plume measurements should also aim to quantify plume dispersion and relative humidity changes with altitude. This data does not exist publicly in peer-reviewed literature.

The second track is initial hardware development: bench-scale nozzle and splash plate testing, mist eliminator characterization with seawater spray, and prototype module design. Because the nozzle strategy is deliberately flexible (Section 5.3), hardware development proceeds in parallel with the measurement campaign. The measurement campaign tells us how large the gap is. Hardware development ensures we have a module ready to fill as much of that gap as possible.

### 14.2 Phase 1: Hardware Pilot (1 to 10 Vessels)

Modules installed on 1 to 10 scrubber-equipped cargo vessels on regular routes through marine stratocumulus regions. Priority corridors: Northeast Pacific (transpacific), Southeast Atlantic (Europe to South America), Southern Ocean.

### 14.3 Measurement Tiers

**Tier 1 (every vessel, continuous):** Optical particle counter/aethalometer above mist eliminator, differential pressure sensing, shipboard weather station, GPS, injection parameters (pressure, volume throughput), ceilometer, AIS.

**Tier 2 (periodic, dedicated aircraft):** low-flying research aircraft through and above the plume measuring aerosol size distribution, relative humidity, cloud droplet spectra, drizzle rates, radiative fluxes.

All pilot campaigns will use both tiers to monitor effects in full depth. Two to three campaigns of 2 to 4 weeks. This is essential for validating satellite verification and detecting cloud darkening effects. Data from the pilot will be used to inform estimated forcing of full-scale deployed systems with less monitoring at the Tier 2 level.

### 14.4 Stopping Criteria

Stopping criteria will be defined before the pilot begins, in collaboration with the IMO MEPC. We suggest for injection to be halted if: (1) net cloud darkening is observed over >10 independent transits; (2) drizzle rates exceed statistically-defined baseline by >2× over 5+ transits; (3) mist eliminator passes >5% by number of particles >3 μm wet; (4) module interferes with scrubber MARPOL compliance; (5) MEPC, flag state, or port state directs cessation. All criteria and triggering data will be published in advance. Tail aircraft may visually observe adverse effects (i.e. drizzle) and halt pilot testing mid-run. Additionally, if independent scientific review identifies systematic bias in the attribution methodology, injection can be paused pending resolution and results published regardless of outcome.

## 14.5 Adaptive Injection Control and Data Transparency

Each vessel's instrumentation feeds an injection decision algorithm activating and adjusting in designated corridors when conditions favor brightening and deactivating when CCN supplementation would not be useful. All pilot data will be published in peer-reviewed literature and archived in open repositories. No proprietary data during the pilot phase. Adverse results will be published with equal transparency.

## 15. Proposed Regulatory Framework

Nephele will not deploy without regulatory backing.

The regulatory framework should cover: equipment type-approval by classification societies; designation of approved operating corridors; monitoring, reporting, and verification requirements; maximum injection rates in terms of CCN concentration at the ship exhaust, and minimum vessel separation; absolute cessation authority retained by MEPC, flag states, and port states (unconditional, not subject to appeal); liability and insurance requirements; and a mandatory periodic review cycle.

## 16. Risks and Mitigations

| Risk                                              | Severity | Mitigation                                                                                                                                            |
|---------------------------------------------------|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Net cloud darkening from drizzle induction</b> | High     | Stopping criteria; aircraft drizzle measurements; mist eliminator rejects $>3\ \mu\text{m}$ ; open-ocean only                                         |
| <b>Splash atomization underperforms</b>           | Medium   | Phase 0 bench testing; splash plate is replaceable cassette; nozzle-agnostic platform allows technology swap                                          |
| <b>Insufficient CCN production</b>                | Medium   | Phase 0 quantifies gap; plume delivery multiplier; nozzle upgrades as technology matures                                                              |
| <b>IMO/MEPC rejects ZNZ classification</b>        | High     | Early delegation engagement; multiple regulatory options (A/B/C); NZF mandate is broad                                                                |
| <b>Political "geoengineering" backlash</b>        | High     | MEPC oversight; open data; 48-hour reversibility (to be demonstrated in Phase 0/1); "restoration not engineering" framing; open-ocean only;           |
| <b>Plume delivery assumptions wrong</b>           | Medium   | Phase 0/1 measurements directly test delivery efficiency; stopping criteria if cloud response insufficient                                            |
| <b>Mist eliminator / splash plate fouling</b>     | Low      | Replaceable cassette; dP monitoring; routine port-call swap; corrosion-resistant materials                                                            |
| <b>Moral hazard (delay decarbonization)</b>       | Medium   | NaCl not combustion-linked; system capacity can exceed pre-2020 levels with future deployment of improved nozzles; we welcome stricter fuel standards |

## 17. Conclusion

The IMO 2020 sulfur cap removed a harmful pollutant from shipping emissions. It also removed the sulfate aerosol that had been seeding brighter marine clouds for over a century. The resulting warming is measurable, documented, and growing.

Nephele fills this gap with pure seawater aerosol, delivered through the ship's own exhaust plume. The plume delivery architecture keeps injected droplets as solution droplets from stack to cloud base, bypassing the drying, deliquescence, and lofting losses that have limited every other marine cloud brightening approach. Ship plumes are the most efficient CCN delivery method on the planet, and they are already deployed on a global scale. The mist eliminator selects the right particle sizes by physics. The ship's existing infrastructure supplies the seawater, the energy, and the delivery mechanism.

Current off-the-shelf hardware with splash atomization delivers approximately  $2.1 \times 10^{13}$  CCN/s to cloud base. Whether this is sufficient to produce a detectable ship track, and what fraction of the pre-2020 cloud perturbation it restores, are empirical questions that Phase 0 will answer directly. Reaching full parity with pre-2020 levels will likely require nozzle technology optimized for CCN production in marine environments, hardware that does not yet exist as a commercial product because the market for it does not yet exist.

IMO recognition of ship track restoration as an eligible activity under the Net-Zero Framework creates that market. It provides the commercial incentive for the maritime spray engineering sector to develop fleet-ready CCN hardware. Nephele's platform is ready for those nozzles the moment they arrive.

The first step is a measurement campaign: quantify the post-2020 CCN deficit from scrubber-equipped vessel plumes. This data does not exist in the peer-reviewed literature. Nephele will produce it.

The barrier is regulatory recognition; the IMO Net-Zero Framework provides the vehicle, the physics are established, the verification infrastructure exists. Ship track restoration is the deliberate, clean, verifiable restoration of forcing that shipping itself produced for decades. The regulatory framework that incentivizes it will also fund the hardware development that perfects it.

## References

- [1] ACS Industries. The Engineered Mist Eliminator. Technical Bulletin.
- [2] Brendecke, J., et al. (2022). Maritime Aerosol and CCN Profiles Over Eastern North Pacific During MAGIC. *Earth and Space Science*, 9.
- [3] Bretherton, C. S., et al. (2010). VOCALS-REx: Observations of SE Pacific stratocumulus. *Atmos. Chem. Phys.*, 10, 10639. [MBL RH never observed below 45% in SE Pacific Sc region; typical sub-cloud RH 80-95%]
- [4] Cadeddu, M. P., et al. (2023). Boundary layer moisture variability at the ARM Eastern North Atlantic observatory. *Atmos. Chem. Phys.*, 23, 3453.
- [5] Carbon Brief (2023). Analysis: How low-sulphur shipping rules are affecting global warming.
- [6] Cossali, G. E., Coghe, A. & Marengo, M. (1997). The impact of a single drop on a wetted solid surface. *Exp. Fluids*, 22, 463. [Splash mechanisms on wetted surfaces; thin films promote splashing]
- [7] Diamond, M. S. & Boss, L. F. (2025). Conflict constrains cloud sensitivity to stricter marine pollution regulations. *Atmos. Chem. Phys.*, 25, 16401.
- [8] Diamond, M. S. (2023). Detection of large-scale cloud microphysical changes within a major shipping corridor. *Atmos. Chem. Phys.*, 23, 8259.
- [9] EPA/452/B-02-001. Section 6: Particulate Matter Controls.
- [10] Gettelman, A., et al. (2024). Has Reducing Ship Emissions Brought Forward Global Warming? *Geophys. Res. Lett.*, 51, e2024GL109077.
- [11] Guildenbecher, D. R., et al. (2009). Secondary atomization. *Exp. Fluids*, 46.
- [12] Hansen, J. E., Kharecha, P., Morgan, D. & Vest, J. (2026). Super El Nino? Super Warming is the Main Issue. 20 March 2026. [Climate sensitivity 4-5°C for doubled CO<sub>2</sub>; reduced aerosol cooling including shipping driving accelerated SST warming]
- [13] Harrison, L. P., et al. (2025). Effervescent nozzle design for MCB experimentation. *Environ. Sci.: Atmos. (RSC)*.
- [14] Hernandez-Jaramillo, D. C., et al. (2023/2025). A review of plume dispersion and measurement techniques applicable to MCB. *Frontiers in Marine Science*.
- [15] Hobbs, P. V., et al. (2000). Emissions from ships with respect to their effects on clouds. *J. Atmos. Sci.*, 57, 2570-2590.
- [16] Hudson, J. G., Garrett, T. J., Hobbs, P. V., Strader, S. R., Xie, Y. & Yum, S. S. (2000). Cloud condensation nuclei and ship tracks. *J. Atmos. Sci.*, 57, 2696-2707. [~10% CCN/CN ratio for HFO-burning ships at 0.2% supersaturation]
- [17] IFRF Handbook. What are main characteristics of a black liquor recovery boiler? [Splash plate nozzle as most common type; mean droplet size 2-3 mm]
- [18] IMO (2025). MEPC 83 Press Briefing. Korean Register, IMO News Flash MEPC 83.
- [19] IMO (2025). The IMO Net-Zero Framework FAQs.
- [20] IMO (2025). Resolution MEPC.403(83): Draft Amendments to MARPOL Annex VI.
- [21] Jenkins, A. K. L. & Forster, P. M. (2013). The inclusion of water with the injected aerosol reduces the simulated effectiveness of MCB. *Atmos. Sci. Lett.*, 14, 164. [Evaporative cooling suppresses plume lofting]
- [22] Jordan, G., et al. (2024). IMO2020 Regulations Accelerate Global Warming by up to 3 Years. *Earth's Future*, 12, e2024EF005011.



- [23] Kato, S., et al. (2022). CERES Cloud Radiative Swath Data Product. *J. Atmos. Oceanic Technol.*, 39.
- [24] Latham, J., et al. (2012). Marine cloud brightening. *Phil. Trans. R. Soc. A*, 370, 4217.
- [25] Lefebvre, A. H. & McDonell, V. G. (2017). *Atomization and Sprays*, 2nd ed. CRC Press.
- [26] Loeb, N. G., et al. (2018). CERES EBAF TOA Edition-4.0. *J. Climate*, 31, 895.
- [27] Manshausen, P., et al. (2022). Invisible ship tracks show large cloud sensitivity to aerosol. *Nature*, 610, 101.
- [28] Minnis, P., et al. (2021). CERES MODIS cloud product retrievals. *IEEE Trans. Geosci. Remote Sens.*, 59.
- [29] Murphy, D. M., et al. (2019). Distribution of sea-salt aerosol in the global troposphere. *Atmos. Chem. Phys.*, 19.
- [30] Neukermans, A., et al. (2014). Sub-micrometer salt aerosol production for MCB. *Atmos. Res.*, 142.
- [31] Petters, M. D. & Kreidenweis, S. M. (2007). Single parameter representation of hygroscopic growth and CCN activity. *Atmos. Chem. Phys.*, 7.
- [32] Raju, V., et al. (2021). Kraft recovery boiler operation with splash plate and/or beer can nozzles. *TAPPI Journal*. [CFD modeling of splash plate nozzle performance]
- [33] Ramana, M. V., et al. (2016). CCN concentrations influenced by ship emitted aerosol plumes. *Scientific Reports*, 6, 30416.
- [34] ScienceDirect (2008). Mist Eliminator overview. *Gas-Liquid And Liquid-Liquid Separators*.
- [35] TESS Forum (2025). Equity in Motion: Revenue Disbursement Under the IMO Net-Zero Framework.
- [36] Twomey, S. (1977). The influence of pollution on the shortwave albedo of clouds. *J. Atmos. Sci.*, 34.
- [37] Vander Wal, R. L., Berger, G. M. & Mozes, S. D. (2006). Droplets splashing upon films of the same fluid of various depths. *Exp. Fluids*, 40, 53. [Thin films promote splashing; thick films inhibit it]
- [38] Vimalraj, S. R. & Vaikuntanathan, V. (2024). Splash droplet size in drop impact on solid surfaces. [Daughter droplet diameter scales as  $We^{-1/4}$ ]
- [39] Watson-Parris, D., et al. (2022). Shipping regulations lead to large reduction in cloud perturbations. *Proc. Natl. Acad. Sci.*, 119.
- [40] Wood, R., et al. (2024). Physical science research needed to evaluate MCB. *Science Advances*.
- [41] Yarin, A. L. (2006). Drop impact dynamics: splashing, spreading, receding, bouncing. *Annu. Rev. Fluid Mech.*, 38, 159.
- [42] Yoshioka, M., et al. (2024). Warming effects of reduced sulfur emissions from shipping. *Atmos. Chem. Phys.*, 24, 13681.
- [43] Yuan, T., et al. (2024). Abrupt reduction in shipping emission as an inadvertent geoengineering termination shock. *Commun. Earth Environ.*, 5, 281.
- [44] Yuan, T., et al. (2025). Detectable ship tracks account for just 5% of aerosol indirect forcing. *Commun. Earth Environ.*, 6, 899.