

**Computing the dynamic frictional coefficient  $\mu_d$   
between wood and steel by measuring the  
relationship between the force of friction and mass.**

**Research Question:** How does changing the mass of a box sliding against a plane affect the force of friction it experiences?

## 1 Introduction

It is perplexing how the force of friction a sliding object experiences happens to be proportional to the size of the normal force at the surface it slides against. We perhaps take it for granted that so many physical phenomena may be described with a proportional model, yet this fact strikes the author as rather remarkable. Despite this, attempting to answer *why* proportionality describes the behaviour of friction is far beyond the scope of this discussion. Instead, we shall merely satisfy our curiosity with an example from which it is easy to observe that the proportional relationship is indeed present.

## 2 Variables

The independent variable is the mass of the box, which is varied in approximately  $200g$  increments. The dependent variable is the frictional force that the box experiences when sliding against the plane. This is measured using a Vernier dual range force sensor. The speed at which the box slides is a notable control variable. To mitigate errors arising from movement at different speeds, the experiment is performed thrice for each mass, with the median of the results selected for further analysis. The maximum and minimum over all three runs are used for error estimation.

## 3 Theory

It is known that force of dynamic friction of a body sliding against a surface is proportional to the normal force that the surface exerts upon the body. Theoretically, this force is not dependent on the area of the contact surface between the body and the surface, nor the speed of the body. This implies the existence of a constant, conventionally denoted by  $\mu_d$  and called the ‘dynamic frictional coefficient’, which is only dependent on the materials

which are sliding against each other, and reports the relation between the normal force and the frictional force. Therefore, in this experiment it suffices to compute the size of the normal force exerted onto the box given its mass, and compare it against the measured average friction. Since the box and the plane are level, the normal force exerted by the plane onto the box is equal to the force of gravitational attraction that the box experiences. Formally, if  $g$  is the gravitational constant ( $\approx 9.81ms^{-2}$ ) and  $m$  is the mass of the box, the normal force  $R$  can be calculated as follows:

$$R = G = mg \quad (3.1)$$

The coefficient of friction  $\mu_d$  is defined as

$$\mu_d = \frac{F_\mu}{R} \quad (3.2)$$

In terms of data processing, the average frictional force of the sliding body  $F_\mu$  can be measured directly by reading the force sensor. The normal force  $R$  exerted on to the box can be computed given its mass using (3.1).

## 4 Existing Results



Figure 1: Box and plane

In this experiment, the plane is a plank of presumably fir or pine. The box is wooden, but it makes contact with the plane with some metal railings, presumably some iron alloy like stainless steel. The box, with its metal railings, is visible in **Figure 1**, with the wooden plane in the background.

There were no existing results regarding the coefficient of dynamic friction with this fir or pine sliding against metal readily available. However, trials using western hemlock should suffice as a reference. After all, both woods are from trees belonging to the *Pinaceae* family and are used in construction.

According to Murase's study[1], the dynamic frictional coefficient is approximately 1.2 for stainless steel and 1.6 for mild steel against western hemlock wood. The following differences in the methodology may explain a greater observed frictional coefficient in this investigation compared to Murase's existing study:

Existing study	This investigation
Uses air-dried wood and shows that increasing moisture content increases friction	Wood moisture content not considered
Uses clean steel with documented surface roughness	Steel railings are slightly rusted ( <b>Figure 1</b> )
Uses western hemlock	Uses softer woods such as European fir or pine

## 5 Apparatus

The apparatus in this investigation is very similar to the one used in Murase's study.

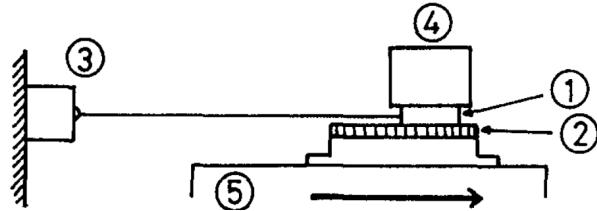


Figure 2. Schematic representation of test apparatus. ① Wood specimen, ② Counterface material, ③ Load cell, ④ Weigh, ⑤ Carriage.

Copied from [1]

Fewer parts are used in the apparatus of this investigation, as seen in figure **Figure 3** below. ① and ④ are collectively referred to as the 'box', whose mass varies by changing the number of weights set on the sliding block. The plank that is pushed acts simultaneously as both the ② counterface material and the ⑤ carriage. ③ is the Vernier force sensor, also called load cell, used for data collection.

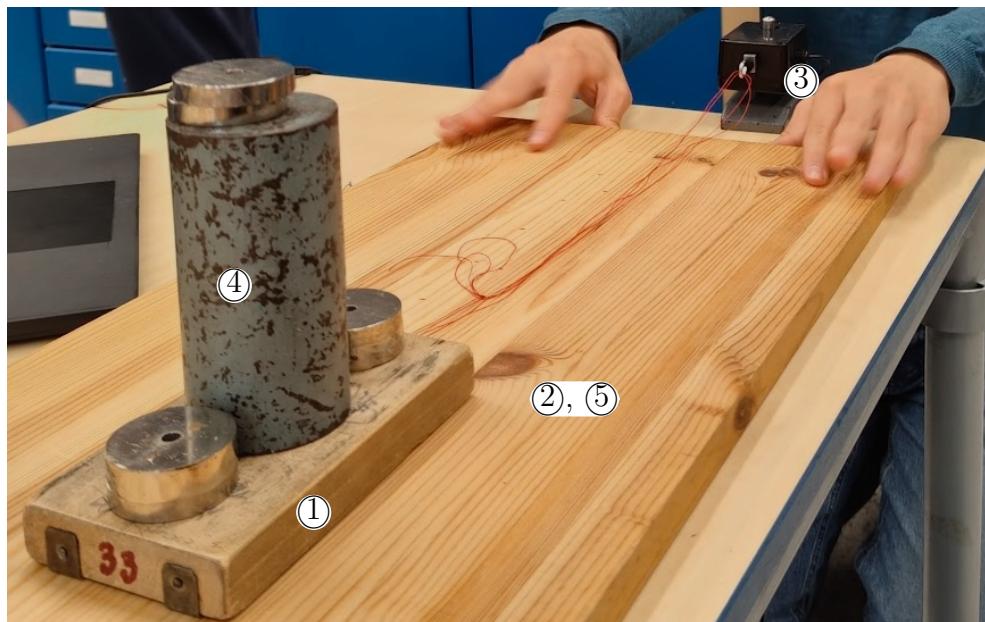


Figure 3: Photo of apparatus

The force sensor is secured to an unmoving platform. The box and the force sensor are connected with a piece of string, selected to minimize unwanted behaviour. The mass is varied in  $200g$  increments, by varying the number of weights on the box.

## 6 procedure

**For each trial:** Put the desired amount of weight onto the box, and measure with a scale to verify. Perform at least three runs for each value of mass tested.

**For each run:** Have the string slack and running parallel with the grain of the wood and in the effective direction of the force sensor. Start data collection and attempt to push the plank at a constant speed, directly away from the force sensor.

## 7 Data and processing

This investigation begins at no weights ( $m = 195g$ ) and proceeds to increment till 6 weights ( $m = 1495g$ ) are on the box. In each trial, three runs are performed and their average frictions measured between  $t = 6s$  and  $t = 8s$  are recorded. Of the three averages, the median is selected for further data processing. The maximum and minimum frictions recorded across these three runs in this time interval are used for error estimation.

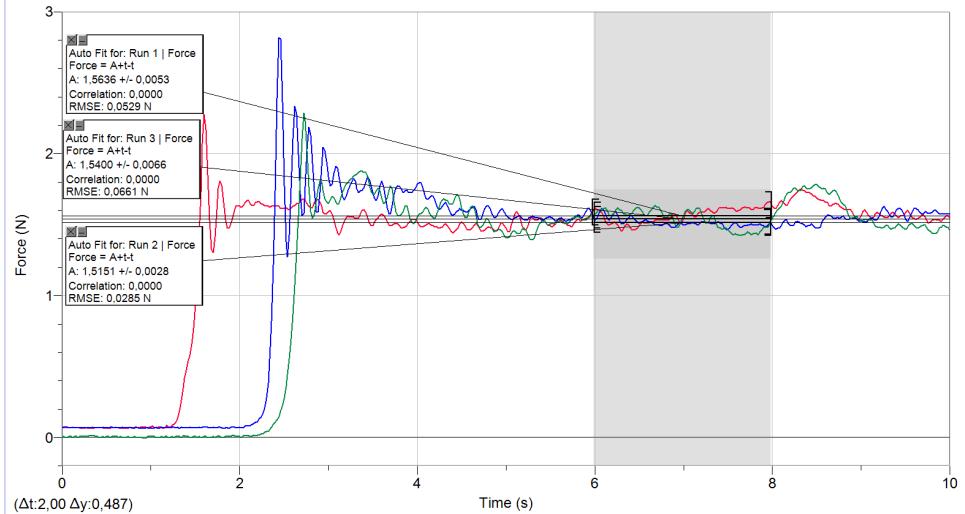


Figure 4: Measurements for  $m = 795g$

For example, in **Figure 4**, the median average friction, which is the one selected for further analysis, is  $1.790N$ . The maximum friction (in red at  $t = 7.97s$ ) is  $1.66N$  and the minimum friction (in green at  $t = 7.64s$ ) is  $1.42N$ . This gives an uncertainty of  $\frac{1.66 - 1.42}{2} = 0.12N$  for friction in this trial.

The mass of the box in this trial is  $995g = 0.995kg$ , so the normal force is  $0.995 \cdot 9.81 \approx 9.76N$ . The uncertainty associated with the normal force is a constant  $0.01N$ , arising from the scale having a precision of  $1g$ .

In this manner, the average friction and its uncertainty are deduced and computed for each trial. The normal force and its uncertainty are also computed, giving **Table 1** below.

$R$	$F_\mu$
$1.91N$	$0.36 \pm 0.12 N$
$3.87N$	$0.74 \pm 0.13 N$
$5.84N$	$1.14 \pm 0.12 N$
$7.80N$	$1.54 \pm 0.12 N$
$9.76N$	$1.79 \pm 0.25 N$
$11.73N$	$2.13 \pm 0.21 N$
$13.68N$	$2.48 \pm 0.17 N$

Table 1: Processed data

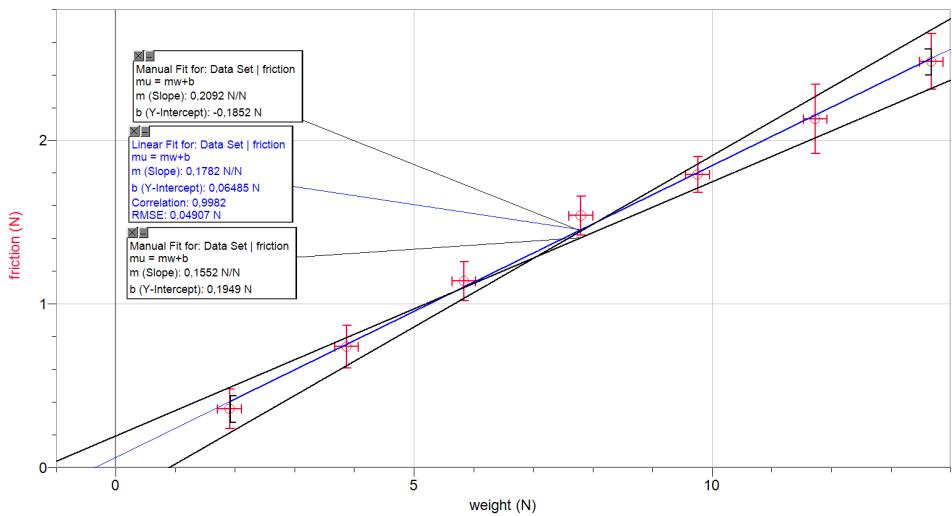


Figure 5: Fitted curves

## 8 Conclusions

## References

- [1] Yasuhide Murase. “Friction of Wood Sliding on Various Materials”. In: *Journal of the Faculty of Agriculture, Kyushu University* 28.4 (1984), pp. 147–160. DOI: [10.5109/23785](https://doi.org/10.5109/23785).