


Lab - Implement a GRE Tunnel (Instructor Version)

Instructor Note: Red font color or gray highlights indicate text that appears in the instructor copy only.

Topology

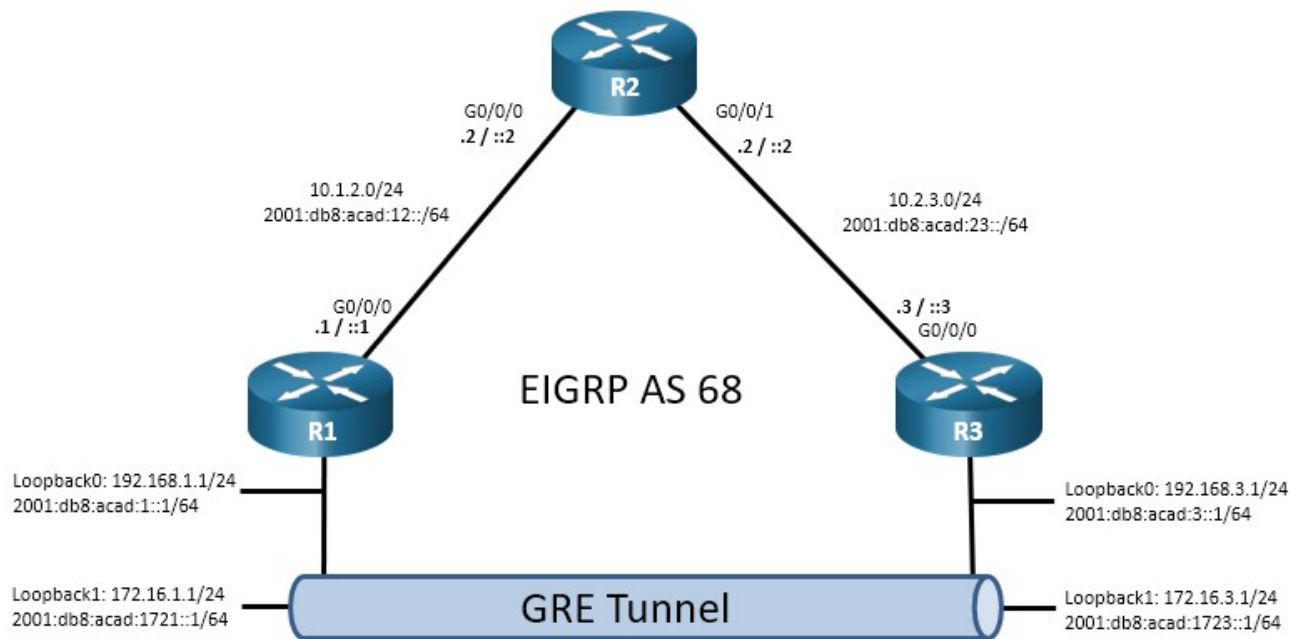

Addressing Table

Device	Interface	IPv4 Address	IPv6 Address	IPv6 Link-Local
R1	G0/0/0	10.1.2.1/24	2001:db8:acad:12::1/64	fe80::1:1
R1	Loopback 0	192.168.1.1/24	2001:db8:acad:1::1/64	fe80::1:2
R1	Loopback 1	172.16.1.1/24	2001:db8:acad:1721::1/64	fe80::1:3
R2	G0/0/0	10.1.2.2/24	2001:db8:acad:12::2/64	fe80::2:1
R2	G0/0/1	10.2.3.2/24	2001:db8:acad:23::2/64	fe80::2:1
R3	G0/0/0	10.2.3.3/24	2001:db8:acad:23::3/64	fe80::3:1
R3	Loopback 0	192.168.3.1/24	2001:db8:acad:3::1/64	fe80::3:2
R3	Loopback 1	172.16.3.1/24	2001:db8:acad:1723::1/64	fe80::3:3

Objectives

Part 1: Build the Network and Configure Basic Device Settings

Part 2: Configure and Verify GRE Tunnels with Static Routing

Part 3: Configure and Verify GRE Tunnels with Dynamic Routing

Background / Scenario

Overlay networks allow you to insert flexibility into existing topologies. An existing physical topology is referred to as an underlay network. Generic Routing Encapsulation (GRE) protocol, which was originally developed by Cisco, is a very useful tool that allows you to create overlay networks to support many different purposes. GRE is very flexible and works with IPv4 and IPv6 in an underlay network. In this lab you will deploy basic GRE tunnels over both IPv4 and IPv6 underlay networks.

Note: This lab is an exercise in configuring and verifying various implementations of GRE tunnels and does not reflect networking best practices.

Note: The routers used with CCNP hands-on labs are Cisco 4221 with Cisco IOS XE Release 16.9.4 (universalk9 image). Other routers and Cisco IOS versions can be used. Depending on the model and Cisco IOS version, the commands available and the output produced might vary from what is shown in the labs.

Note: Ensure that the routers' startup configurations have been erased and the devices reloaded if necessary. If you are unsure contact your instructor.

Instructor Note: Refer to the Instructor Lab Manual for the procedures to initialize and reload devices.

Required Resources

- 3 Routers (Cisco 4221 with Cisco IOS XE Release 16.9.4 universal image or comparable)
- 1 PC (Choice of operating system with a terminal emulation program installed)
- Console cables to configure the Cisco IOS devices via the console ports
- Ethernet cables as shown in the topology

Instructions

Part 1: Build the Network and Configure Basic Device Settings

In Part 1, you will set up the network topology and configure basic settings.

a. Cable the network as shown in the topology.

Attach the devices as shown in the topology diagram, and cable as necessary.

b. Configure basic settings for each switch.

- Console into each router, enter global configuration mode, and apply the basic settings for the lab. Initial configurations for each device are listed below.

Open configuration window

Router R1

```
hostname R1
no ip domain lookup
ipv6 unicast-routing
banner motd # R1, Implement a GRE Tunnel #
line con 0
  exec-timeout 0 0
  logging synchronous
  exit
line vty 0 4
```

```
privilege level 15
password cisco123
exec-timeout 0 0
logging synchronous
login
exit
router eigrp EIGRP-IPv4_GRE_LAB
address-family ipv4 unicast autonomous-system 68
  eigrp router-id 1.1.1.1
  network 10.1.2.0 255.255.255.0
  network 192.168.1.0 255.255.255.0
  network 172.16.1.0 255.255.255.0
  exit
exit
router eigrp EIGRP-IPv6_GRE_LAB
address-family ipv6 unicast autonomous-system 68
  eigrp router-id 1.1.1.1
  exit
exit
interface g0/0/0
ip address 10.1.2.1 255.255.255.0
ipv6 address fe80::1:1 link-local
ipv6 address 2001:db8:acad:12::1/64
no shutdown
exit
interface loopback 0
ip address 192.168.1.1 255.255.255.0
ipv6 address fe80::1:2 link-local
ipv6 address 2001:db8:acad:1::1/64
no shutdown
exit
interface loopback 1
ip address 172.16.1.1 255.255.255.0
ipv6 address fe80::1:3 link-local
ipv6 address 2001:db8:acad:1721::1/64
exit
```

Router R2

```
hostname R2
no ip domain lookup
ipv6 unicast-routing
banner motd # R2, Implement a GRE Tunnel #
line con 0
  exec-timeout 0 0
  logging synchronous
exit
```

```
line vty 0 4
  privilege level 15
  password cisco123
  exec-timeout 0 0
  logging synchronous
  login
  exit
router eigrp EIGRP-IPv4_GRE_LAB
  address-family ipv4 unicast autonomous-system 68
  eigrp router-id 2.2.2.2
  network 10.1.2.0 255.255.255.0
  network 10.2.3.0 255.255.255.0
  exit
exit
router eigrp EIGRP-IPv6_GRE_LAB
  address-family ipv6 unicast autonomous-system 68
  eigrp router-id 2.2.2.2
  exit
exit
interface g0/0/0
  ip address 10.1.2.2 255.255.255.0
  ipv6 address fe80::2:1 link-local
  ipv6 address 2001:db8:acad:12::2/64
  no shutdown
  exit
interface g0/0/1
  ip address 10.2.3.2 255.255.255.0
  ipv6 address fe80::2:2 link-local
  ipv6 address 2001:db8:acad:23::2/64
  no shutdown
  exit
```

Router R3

```
hostname R3
no ip domain lookup
ipv6 unicast-routing
banner motd # R3, Implement a GRE Tunnel #
line con 0
  exec-timeout 0 0
  logging synchronous
  exit
line vty 0 4
  privilege level 15
  password cisco123
  exec-timeout 0 0
  logging synchronous
```

```
login
exit
router eigrp EIGRP-IPv4_GRE_LAB
  address-family ipv4 unicast autonomous-system 68
    eigrp router-id 3.3.3.3
    network 10.2.3.0 255.255.255.0
    network 192.168.3.1 255.255.255.0
    network 172.16.3.0 255.255.255.0
  exit
exit
router eigrp EIGRP-IPv6_GRE_LAB
  address-family ipv6 unicast autonomous-system 68
    eigrp router-id 3.3.3.3
  exit
exit
interface g0/0/0
  ip address 10.2.3.3 255.255.255.0
  ipv6 address fe80::3:1 link-local
  ipv6 address 2001:db8:acad:23::3/64
  no shutdown
exit
interface loopback 0
  ip address 192.168.3.1 255.255.255.0
  ipv6 address fe80::3:2 link-local
  ipv6 address 2001:db8:acad:3::1/64
  no shutdown
exit
interface loopback 1
  ip address 172.16.3.1 255.255.255.0
  ipv6 address fe80::3:3 link-local
  ipv6 address 2001:db8:acad:1723::1/64
  no shutdown
exit
```

- b. Set the clock on each device to UTC time.
- c. Save the running configuration to startup-config.

Close configuration window

Part 2: Configure and Verify GRE Tunnels with Static Routing

In Part 2, you will configure and verify a GRE tunnel between R1 and R3. You will use static routes for overlay reachability and dynamic routing for underlay reachability. You will configure two tunnels, one for IPv4 traffic and one for IPv6 traffic. GRE tunnels are extremely flexible, and there are many options for implementation beyond what is being done in this lab.

a. Verify reachability between R1 and R3.

- a. From R1, ping R3 interface Loopback 0 using IPv4. All pings should be successful.

Open configuration window

```
R1# ping 192.168.3.1
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 192.168.3.1, timeout is 2 seconds:
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/1 ms
```

- b. From R1, ping R3 interface Loopback 0 using IPv6. All pings should be successful.

```
R1# ping 2001:db8:acad:3::1
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 2001:DB8:ACAD:3::1, timeout is 2 seconds:
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/2/7 ms
```

b. Create an IPv4-based GRE tunnel between R1 and R3.

- a. On R1, create interface Tunnel 0, by specifying the IP address 100.100.100.1/30, a tunnel source of Loopback0, and a tunnel destination of 192.168.3.1.

```
R1(config)# interface tunnel 0
R1(config-if)# ip address 100.100.100.1 255.255.255.252
R1(config-if)# tunnel source loopback 0
R1(config-if)# tunnel destination 192.168.3.1
R1(config-if)# exit
```

- b. On R1, create a static route to 172.16.3.0/24 via interface Tunnel 0.

```
R1(config)# ip route 172.16.3.0 255.255.255.0 tunnel 0
```

Close configuration window

- c. On R3, create interface Tunnel 0, by specifying the IP address 100.100.100.2/30, a tunnel source of Loopback0, and a tunnel destination of 192.168.1.1.

Open configuration window

```
R3(config)# interface tunnel 0
R3(config-if)# ip address 100.100.100.2 255.255.255.252
R3(config-if)# tunnel source loopback 0
R3(config-if)# tunnel destination 192.168.1.1
R3(config-if)# exit
```

- d. On R3, create a static route to 172.16.1.0/24 via interface Tunnel 0.

```
R3(config)# ip route 172.16.1.0 255.255.255.0 tunnel 0
```

Close configuration window

- e. On R1, issue the **show interface tunnel 0** command and examine the output.

Open configuration window

```
R1# show interface tunnel 0
Tunnel0 is up, line protocol is up
  Hardware is Tunnel
  Internet address is 100.100.100.1/30
  MTU 9976 bytes, BW 100 Kbit/sec, DLY 50000 usec,
    reliability 255/255, txload 1/255, rxload 1/255
  Encapsulation TUNNEL, loopback not set
  Keepalive not set
  Tunnel linestate evaluation up
  Tunnel source 192.168.1.1 (Loopback0), destination 192.168.3.1
```

```
Tunnel Subblocks:
  src-track:
    Tunnel0 source tracking subblock associated with Loopback0
    Set of tunnels with source Loopback0, 1 member (includes iterators), on
interface <OK>
Tunnel protocol/transport GRE/IP
  Key disabled, sequencing disabled
  Checksumming of packets disabled
  Tunnel TTL 255, Fast tunneling enabled
Tunnel transport MTU 1476 bytes
Tunnel transmit bandwidth 8000 (kbps)
Tunnel receive bandwidth 8000 (kbps)
Last input never, output never, output hang never
Last clearing of "show interface" counters 00:02:45
Input queue: 0/375/0/0 (size/max/drops/flushes); Total output drops: 0
Queueing strategy: fifo
Output queue: 0/0 (size/max)
5 minute input rate 0 bits/sec, 0 packets/sec
5 minute output rate 0 bits/sec, 0 packets/sec
  0 packets input, 0 bytes, 0 no buffer
  Received 0 broadcasts (0 IP multicasts)
  0 runs, 0 giants, 0 throttles
  0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored, 0 abort
  0 packets output, 0 bytes, 0 underruns
  0 output errors, 0 collisions, 0 interface resets
  0 unknown protocol drops
  0 output buffer failures, 0 output buffers swapped out
```

- f. From R1, ping 172.16.3.1. The pings should be successful.

c. Create an IPv6-based GRE tunnel between R1 and R3.

- a. On R1, create interface Tunnel 1, by specifying the IPv6 address 2001:db8:ffff::1/64, a tunnel source of Loopback 0, a tunnel destination of 2001:db8:acad:3::1, and the tunnel mode GRE IPv6.

```
R1(config)# interface tunnel 1
R1(config-if)# ipv6 address 2001:db8:ffff::1/64
R1(config-if)# tunnel source loopback 0
R1(config-if)# tunnel destination 2001:db8:acad:3::1
R1(config-if)# tunnel mode gre ipv6
R1(config-if)# exit
```

- b. On R1, create a static route to 2001:db8:acad:1723::/64 via interface Tunnel 1.

```
R1(config)# ipv6 route 2001:db8:acad:1723::/64 tunnel 1
```

Close configuration window

- c. On R3, create interface Tunnel 1, by specifying the IPv6 address 1002:db8:ffff::2/64, a tunnel source of Loopback 0, a tunnel destination of 2001:db8:acad:1::1 and the tunnel mode of GRE IPv6.

Open configuration window

```
R3(config)# interface tunnel 1
R3(config-if)# ipv6 address 2001:db8:ffff::2/64
R3(config-if)# tunnel source loopback 0
```

```
R3(config-if)# tunnel destination 2001:db8:acad:1::1
R3(config-if)# tunnel mode gre ipv6
R3(config-if)# exit
```

- d. On R3, create a static route to 2001:db8:acad:1721::/64 via interface Tunnel 1.

```
R3(config)# ipv6 route 2001:db8:acad:1721::/64 tunnel 1
```

Close configuration window

- e. On R1, issue the **show interface tunnel 1** command and examine the output.

Open configuration window

```
R1# show interface tunnel 1
Tunnell is up, line protocol is up
  Hardware is Tunnel
  MTU 1456 bytes, BW 100 Kbit/sec, DLY 50000 usec,
    reliability 255/255, txload 255/255, rxload 255/255
  Encapsulation TUNNEL, loopback not set
  Keepalive not set
  Tunnel linestate evaluation up
  Tunnel source 2001:DB8:ACAD:1::1 (Loopback0), destination 2001:DB8:ACAD:3::1
  Tunnel Subblocks:
    src-track:
      Tunnell source tracking subblock associated with Loopback0
      Set of tunnels with source Loopback0, 2 members (includes iterators), on
interface <OK>
  Tunnel protocol/transport GRE/IPV6
    Key disabled, sequencing disabled
    Checksumming of packets disabled
  Tunnel TTL 255
  Path MTU Discovery, age 10 mins, min MTU 1280
  Tunnel transport MTU 1456 bytes
  Tunnel transmit bandwidth 8000 (kbps)
  Tunnel receive bandwidth 8000 (kbps)
  Last input 00:00:31, output 00:01:01, output hang never
  Last clearing of "show interface" counters 00:06:58
  Input queue: 0/375/0/0 (size/max/drops/flushes); Total output drops: 0
  Queueing strategy: fifo
  Output queue: 0/0 (size/max)
  5 minute input rate 367000 bits/sec, 395 packets/sec
  5 minute output rate 367000 bits/sec, 395 packets/sec
    246335 packets input, 28574884 bytes, 0 no buffer
    Received 0 broadcasts (0 IP multicasts)
    0 runs, 0 giants, 0 throttles
    0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored, 0 abort
    246336 packets output, 28575000 bytes, 0 underruns
    0 output errors, 0 collisions, 0 interface resets
    0 unknown protocol drops
    0 output buffer failures, 0 output buffers swapped out
```

- f. From R1, ping 2001:db8:acad:1723::1. The pings should be successful.

Close configuration window

Part 3: Configure and Verify GRE Tunnels with Dynamic Routing

In Part 3, you will configure and verify GRE tunnels between R1 and R3. You will use dynamic routing for overlay reachability and static routing for underlay reachability. You will configure two tunnels, one for IPv4 traffic and one for IPv6 traffic.

a. Remove the tunnel interfaces and dynamic routing on R1 and R3.

Open configuration window

- Issue the **no interface tunnel 0** and **no interface tunnel 1** command on R1 and R3. This will also remove the static routes.
- On R1, R2, and R3, remove EIGRP with the **no router eigrp EIGRP-IPv4_GRE_LAB** and **no router eigrp EIGRP-IPv6_GRE_LAB** commands.

b. Replace the EIGRP configuration on R1, R2, and R3 with static routing.

- On R1 and R3, create IPv4 and IPv6 static default routes that point to R2.

```
R1(config)# ip route 0.0.0.0 0.0.0.0 GigabitEthernet0/0/0 10.1.2.2
R1(config)# ipv6 route ::/0 2001:DB8:ACAD:12::2
```

```
R3(config)# ip route 0.0.0.0 0.0.0.0 GigabitEthernet0/0/0 10.2.3.2
R3(config)# ipv6 route ::/0 2001:DB8:ACAD:23::2
```

- On R2, create IPv4 and IPv6 static routes that point to the R1 and R3 Loopback 0 networks.

```
R2(config)# ip route 192.168.1.0 255.255.255.0 10.1.2.1
R2(config)# ip route 192.168.3.0 255.255.255.0 10.2.3.3
R2(config)# ipv6 route 2001:db8:acad:1::/64 2001:db8:acad:12::1
R2(config)# ipv6 route 2001:db8:acad:3::/64 2001:db8:acad:23::3
```

- Verify that R1 can reach Loopback 0 on R3 with pings that use the source address of the R1 Loopback 0 address.

```
R1# ping 192.168.3.1 source loopback 0
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 192.168.3.1, timeout is 2 seconds:
Packet sent with a source address of 192.168.1.1
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/2 ms
```

```
R1# ping 2001:db8:acad:3::1 source loopback 0
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 2001:DB8:ACAD:3::1, timeout is 2 seconds:
Packet sent with a source address of 2001:DB8:ACAD:1::1
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/1 ms
```

c. Create an IPv4-based GRE tunnel between R1 and R3.

- On R1, create interface Tunnel 0, by specifying the IP address 100.100.100.1/30, bandwidth of 4000 kbps, a tunnel source of Loopback 0, and a tunnel destination of 192.168.3.1.

```
R1(config)# interface tunnel 0
R1(config-if)# ip address 100.100.100.1 255.255.255.252
R1(config-if)# bandwidth 4000
```

```
R1(config-if)# ip mtu 1400
R1(config-if)# tunnel source loopback 0
R1(config-if)# tunnel destination 192.168.3.1
R1(config-if)# exit
```

- b. On R1, configure classic EIGRP for IPv4 with router-id 1.1.1.1 and AS 68. The network statements should include Tunnel 0 and Loopback 1.

```
R1(config)# router eigrp 68
R1(config-router)# eigrp router-id 1.1.1.1
R1(config-router)# network 100.100.100.0 255.255.255.252
R1(config-router)# network 172.16.1.0 255.255.255.0
R1(config-router)# exit
```

- c. On R3, create interface Tunnel 0, by specifying the IP address 100.100.100.2/30, bandwidth of 4000 kbps, a tunnel source of Loopback0, and a tunnel destination of 192.168.1.1.

```
R3(config)# interface tunnel 0
R3(config-if)# ip address 100.100.100.2 255.255.255.252
R3(config-if)# bandwidth 4000
R3(config-if)# ip mtu 1400
R3(config-if)# tunnel source loopback 0
R3(config-if)# tunnel destination 192.168.1.1
R3(config-if)# exit
```

- d. On R3, configure classic EIGRP for IPv4 with router-id 3.3.3.3 and AS 68. The network statements should include Tunnel 0 and Loopback 1.

```
R3(config)# router eigrp 68
R3(config-router)# eigrp router-id 3.3.3.3
R3(config-router)# network 100.100.100.0 255.255.255.252
R3(config-router)# network 172.16.3.0 255.255.255.0
R3(config-router)# end
```

- e. On R1, issue the **show interface tunnel 0** command and examine the output.

```
R1# show interface tunnel 0
Tunnel0 is up, line protocol is up
  Hardware is Tunnel
  Internet address is 100.100.100.1/30
  MTU 9976 bytes, BW 4000 Kbit/sec, DLY 50000 usec,
    reliability 255/255, txload 1/255, rxload 1/255
  Encapsulation TUNNEL, loopback not set
  Keepalive not set
  Tunnel linestate evaluation up
  Tunnel source 192.168.1.1 (Loopback0), destination 192.168.3.1
  Tunnel Subblocks:
    src-track:
      Tunnel0 source tracking subblock associated with Loopback0
      Set of tunnels with source Loopback0, 1 member (includes iterators), on
interface <OK>
  Tunnel protocol/transport GRE/IP
  Key disabled, sequencing disabled
  Checksumming of packets disabled
```

```
Tunnel TTL 255, Fast tunneling enabled
Tunnel transport MTU 1476 bytes
Tunnel transmit bandwidth 8000 (kbps)
Tunnel receive bandwidth 8000 (kbps)
Last input 00:00:01, output 00:00:04, output hang never
Last clearing of "show interface" counters 00:06:11
Input queue: 0/375/0/0 (size/max/drops/flushes); Total output drops: 0
Queueing strategy: fifo
Output queue: 0/0 (size/max)
5 minute input rate 0 bits/sec, 0 packets/sec
5 minute output rate 0 bits/sec, 0 packets/sec
 23 packets input, 2064 bytes, 0 no buffer
Received 0 broadcasts (0 IP multicasts)
 0 runs, 0 giants, 0 throttles
 0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored, 0 abort
58 packets output, 6784 bytes, 0 underruns
 0 output errors, 0 collisions, 0 interface resets
 0 unknown protocol drops
 0 output buffer failures, 0 output buffers swapped out
```

- f. On R1, issue the **show ip route eigrp | begin Gateway** command and verify that 172.16.3.0/24 appears in the routing table as an EIGRP route.

```
R1# show ip route eigrp | begin Gateway
Gateway of last resort is 10.1.2.2 to network 0.0.0.0
```

```
172.16.0.0/16 is variably subnetted, 3 subnets, 2 masks
D    172.16.3.0/24 [90/2048000] via 100.100.100.2, 00:02:01, Tunnel0
```

- g. From R1, ping 172.16.3.1. The pings should be successful.

d. Create an IPv6-based GRE tunnel between R1 and R3.

- a. On R1, create interface Tunnel 1, by specifying the IPv6 address 2001:db8:ffff::1/64, bandwidth of 4000 kbps, a tunnel source of Loopback 0, and a tunnel destination of 2001:db8:acad:3::1.

```
R1(config)# interface tunnel 1
R1(config-if)# ipv6 address 2001:db8:ffff::1/64
R1(config-if)# bandwidth 4000
R1(config-if)# tunnel source loopback 0
R1(config-if)# tunnel destination 2001:db8:acad:3::1
R1(config-if)# tunnel mode gre ipv6
R1(config-if)# exit
```

- b. On R1, configure classic EIGRP for IPv6 with router-id 1.1.1.1 and AS 68. Add the **ipv6 eigrp 68** command to the Tunnel 1 and Loopback 1 interfaces.

```
R1(config)# ipv6 router eigrp 68
R1(config-rtr)# eigrp router-id 1.1.1.1
R1(config-rtr)# exit
R1(config)# interface tunnel 1
R1(config-if)# ipv6 eigrp 68
R1(config-if)# exit
```

```
R1(config)# interface loopback 1
R1(config-if)# ipv6 eigrp 68
R1(config-if)# end
```

- c. On R3, create interface Tunnel 1, by specifying the IPv6 address 1002:db8:ffff::2/64, bandwidth of 4000 kbps, a tunnel source of Loopback 0, and a tunnel destination of 2001:db8:acad:1::1.

```
R3(config)# interface tunnel 1
R3(config-if)# ipv6 address 2001:db8:ffff::2/64
R3(config-if)# bandwidth 4000
R3(config-if)# tunnel source loopback 0
R3(config-if)# tunnel destination 2001:db8:acad:1::1
R3(config-if)# tunnel mode gre ipv6
R3(config-if)# exit
```

- d. On R3, configure classic EIGRP for IPv6 with router-id 3.3.3.3 and AS 68. Add the **ipv6 eigrp 68** command to the Tunnel 1 and Loopback 1 interfaces.

```
R3(config)# ipv6 router eigrp 68
R3(config-rtr)# eigrp router-id 3.3.3.3
R3(config-rtr)# exit
R3(config)# interface tunnel 1
R3(config-if)# ipv6 eigrp 68
R3(config-if)# exit
R3(config)# interface loopback 1
R3(config-if)# ipv6 eigrp 68
R3(config-if)# exit
```

- e. On R1, issue the **show interface tunnel 1** command and examine the output.

```
R1# show interface tunnel 1
Tunnell is up, line protocol is up
  Hardware is Tunnel
  MTU 1456 bytes, BW 4000 Kbit/sec, DLY 50000 usec,
    reliability 255/255, txload 1/255, rxload 1/255
  Encapsulation TUNNEL, loopback not set
  Keepalive not set
  Tunnel linestate evaluation up
  Tunnel source 2001:DB8:ACAD:1::1 (Loopback0), destination 2001:DB8:ACAD:3::1
  Tunnel Subblocks:
    src-track:
      Tunnell source tracking subblock associated with Loopback0
      Set of tunnels with source Loopback0, 2 members (includes iterators), on
interface <OK>
  Tunnel protocol/transport GRE/IPv6
    Key disabled, sequencing disabled
    Checksumming of packets disabled
  Tunnel TTL 255
  Path MTU Discovery, age 10 mins, min MTU 1280
  Tunnel transport MTU 1456 bytes
  Tunnel transmit bandwidth 8000 (kbps)
  Tunnel receive bandwidth 8000 (kbps)
  Last input 00:00:09, output 00:00:04, output hang never
```

Lab - Implement a GRE Tunnel

```
Last clearing of "show interface" counters 00:04:20
Input queue: 0/375/0/0 (size/max/drops/flushes); Total output drops: 0
Queueing strategy: fifo
Output queue: 0/0 (size/max)
5 minute input rate 0 bits/sec, 0 packets/sec
5 minute output rate 0 bits/sec, 0 packets/sec
 31 packets input, 4048 bytes, 0 no buffer
Received 0 broadcasts (0 IP multicasts)
 0 runs, 0 giants, 0 throttles
 0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored, 0 abort
46 packets output, 5864 bytes, 0 underruns
 0 output errors, 0 collisions, 0 interface resets
 0 unknown protocol drops
 0 output buffer failures, 0 output buffers swapped out
```

- f. On R1, issue the **show ipv6 route eigrp | section D** command and verify that 2001:db8:acad:1723::/64 appears in the routing table as an OSPF route.

```
R1# show ipv6 route eigrp | section D
      I2 - ISIS L2, IA - ISIS interarea, IS - ISIS summary, D - EIGRP
      EX - EIGRP external, ND - ND Default, NDp - ND Prefix, DCE - Destination
      NDr - Redirect, RL - RPL, O - OSPF Intra, OI - OSPF Inter
D    2001:DB8:ACAD:1723::/64 [90/2048000]
    via FE80::2FC:BAFF:FE94:29B0, Tunnel1
```

- g. From R1, ping 2001:db8:acad:1723::1. The pings should be successful.

Close configuration window

Router Interface Summary Table

Router Model	Ethernet Interface #1	Ethernet Interface #2	Serial Interface #1	Serial Interface #2
1800	Fast Ethernet 0/0 (F0/0)	Fast Ethernet 0/1 (F0/1)	Serial 0/0/0 (S0/0/0)	Serial 0/0/1 (S0/0/1)
1900	Gigabit Ethernet 0/0 (G0/0)	Gigabit Ethernet 0/1 (G0/1)	Serial 0/0/0 (S0/0/0)	Serial 0/0/1 (S0/0/1)
2801	Fast Ethernet 0/0 (F0/0)	Fast Ethernet 0/1 (F0/1)	Serial 0/1/0 (S0/1/0)	Serial 0/1/1 (S0/1/1)
2811	Fast Ethernet 0/0 (F0/0)	Fast Ethernet 0/1 (F0/1)	Serial 0/0/0 (S0/0/0)	Serial 0/0/1 (S0/0/1)
2900	Gigabit Ethernet 0/0 (G0/0)	Gigabit Ethernet 0/1 (G0/1)	Serial 0/0/0 (S0/0/0)	Serial 0/0/1 (S0/0/1)
4221	Gigabit Ethernet 0/0/0 (G0/0/0)	Gigabit Ethernet 0/0/1 (G0/0/1)	Serial 0/1/0 (S0/1/0)	Serial 0/1/1 (S0/1/1)
4300	Gigabit Ethernet 0/0/0 (G0/0/0)	Gigabit Ethernet 0/0/1 (G0/0/1)	Serial 0/1/0 (S0/1/0)	Serial 0/1/1 (S0/1/1)

Note: To find out how the router is configured, look at the interfaces to identify the type of router and how many interfaces the router has. There is no way to effectively list all the combinations of configurations for each router class. This table includes identifiers for the possible combinations of Ethernet and Serial interfaces in the device. The table does not include any other type of interface, even though a specific router may contain one. An example

of this might be an ISDN BRI interface. The string in parenthesis is the legal abbreviation that can be used in Cisco IOS commands to represent the interface.

End of document

Device Configs - Final

Router R1

```
R1# show run
Building configuration...

Current configuration : 2231 bytes
!
version 16.9
service timestamps debug datetime msec
service timestamps log datetime msec
platform qfp utilization monitor load 80
no platform punt-keepalive disable-kernel-core
!
hostname R1
!
boot-start-marker
boot-end-marker
!
no aaa new-model
!
no ip domain lookup
!
login on-success log
!
subscriber templating
!
ipv6 unicast-routing
multilink bundle-name authenticated
!
spanning-tree extend system-id
!
redundancy
mode none
!
interface Loopback0
 ip address 192.168.1.1 255.255.255.0
 ipv6 address FE80::1:2 link-local
 ipv6 address 2001:DB8:ACAD:1::1/64
!
interface Loopback1
 ip address 172.16.1.1 255.255.255.0
 ipv6 address FE80::1:3 link-local
 ipv6 address 2001:DB8:ACAD:1721::1/64
 ipv6 eigrp 68
```

Lab - Implement a GRE Tunnel

```
!  
interface Tunnel0  
  bandwidth 4000  
  ip address 100.100.100.1 255.255.255.252  
  ip mtu 1400  
  tunnel source Loopback0  
  tunnel destination 192.168.3.1  
!  
interface Tunnel1  
  bandwidth 4000  
  no ip address  
  ipv6 address 2001:DB8:FFFF::1/64  
  ipv6 eigrp 68  
  tunnel source Loopback0  
  tunnel mode gre ipv6  
  tunnel destination 2001:DB8:ACAD:3::1  
  tunnel path-mtu-discovery  
!  
interface GigabitEthernet0/0/0  
  ip address 10.1.2.1 255.255.255.0  
  negotiation auto  
  ipv6 address FE80::1:1 link-local  
  ipv6 address 2001:DB8:ACAD:12::1/64  
!  
interface GigabitEthernet0/0/1  
  no ip address  
  negotiation auto  
!  
interface Serial0/1/0  
  no ip address  
!  
interface Serial0/1/1  
  no ip address  
!  
router eigrp 68  
  network 100.100.100.0 0.0.0.3  
  network 172.16.1.0 0.0.0.255  
  eigrp router-id 1.1.1.1  
!  
ip forward-protocol nd  
no ip http server  
ip http secure-server  
ip route 0.0.0.0 0.0.0.0 GigabitEthernet0/0/0 10.1.2.2  
!  
ipv6 route ::/0 2001:DB8:ACAD:12::2  
ipv6 router eigrp 68  
  eigrp router-id 1.1.1.1  
!  
control-plane  
!
```

Lab - Implement a GRE Tunnel

```
banner motd ^C R1, Implement a GRE Tunnel ^C
!
line con 0
  exec-timeout 0 0
  logging synchronous
  transport input none
  stopbits 1
line aux 0
  stopbits 1
line vty 0 4
  exec-timeout 0 0
  privilege level 15
  password cisco123
  logging synchronous
  login
!
end
```

Router R2

```
R2# show run
Building configuration...

Current configuration : 1960 bytes
!
version 16.9
service timestamps debug datetime msec
service timestamps log datetime msec
platform qfp utilization monitor load 80
no platform punt-keepalive disable-kernel-core
!
hostname R2
!
boot-start-marker
boot-end-marker
!
no aaa new-model
!
no ip domain lookup
!
login on-success log
!
subscriber templating
!
ipv6 unicast-routing
multilink bundle-name authenticated
!
spanning-tree extend system-id
!
redundancy
```


Lab - Implement a GRE Tunnel

```
mode none
!
interface GigabitEthernet0/0/0
 ip address 10.1.2.2 255.255.255.0
 negotiation auto
 ipv6 address FE80::2:1 link-local
 ipv6 address 2001:DB8:ACAD:12::2/64
!
interface GigabitEthernet0/0/1
 ip address 10.2.3.2 255.255.255.0
 negotiation auto
 ipv6 address FE80::2:2 link-local
 ipv6 address 2001:DB8:ACAD:23::2/64
!
ip forward-protocol nd
no ip http server
ip http secure-server
ip route 192.168.1.0 255.255.255.0 10.1.2.1
ip route 192.168.3.0 255.255.255.0 10.2.3.3
!
ipv6 route 2001:DB8:ACAD:1::/64 2001:DB8:ACAD:12::1
ipv6 route 2001:DB8:ACAD:3::/64 2001:DB8:ACAD:23::3
!
control-plane
!
banner motd ^C R2, Implement a GRE Tunnel ^C
!
line con 0
 exec-timeout 0 0
 logging synchronous
 transport input none
 stopbits 1
line aux 0
 stopbits 1
line vty 0 4
 exec-timeout 0 0
 privilege level 15
 password cisco123
 logging synchronous
 login
!
end
```

Router R3

```
R3# show run
Building configuration...

Current configuration : 2262 bytes
!
```

Lab - Implement a GRE Tunnel

```
version 16.9
service timestamps debug datetime msec
service timestamps log datetime msec
platform qfp utilization monitor load 80
no platform punt-keepalive disable-kernel-core
!
hostname R3
!
boot-start-marker
boot-end-marker
!
no aaa new-model
!
no ip domain lookup
!
login on-success log
!
subscriber templating
!
vtp domain TSHOOT
vtp mode off
!
ipv6 unicast-routing
multilink bundle-name authenticated
!
spanning-tree extend system-id
!
redundancy
mode none
!
interface Loopback0
 ip address 192.168.3.1 255.255.255.0
 ipv6 address FE80::3:2 link-local
 ipv6 address 2001:DB8:ACAD:3::1/64
!
interface Loopback1
 ip address 172.16.3.1 255.255.255.0
 ipv6 address FE80::3:3 link-local
 ipv6 address 2001:DB8:ACAD:1723::1/64
 ipv6 eigrp 68
!
interface Tunnel0
 bandwidth 4000
 ip address 100.100.100.2 255.255.255.252
 ip mtu 1400
 tunnel source Loopback0
 tunnel destination 192.168.1.1
!
interface Tunnel1
 bandwidth 4000
```

Lab - Implement a GRE Tunnel

```
no ip address
ipv6 address 2001:DB8:FFFF::2/64
ipv6 eigrp 68
tunnel source Loopback0
tunnel mode gre ipv6
tunnel destination 2001:DB8:ACAD:1::1
tunnel path-mtu-discovery
!
interface GigabitEthernet0/0/0
ip address 10.2.3.3 255.255.255.0
negotiation auto
ipv6 address FE80::3:1 link-local
ipv6 address 2001:DB8:ACAD:23::3/64
!
interface GigabitEthernet0/0/1
no ip address
negotiation auto
!
interface Serial0/1/0
no ip address
!
interface Serial0/1/1
no ip address
!
router eigrp 68
network 100.100.100.0 0.0.0.3
network 172.16.3.0 0.0.0.255
eigrp router-id 3.3.3.3
!
ip forward-protocol nd
no ip http server
ip http secure-server
ip route 0.0.0.0 0.0.0.0 GigabitEthernet0/0/0 10.2.3.2
!
ipv6 route ::/0 2001:DB8:ACAD:23::2
ipv6 router eigrp 68
eigrp router-id 3.3.3.3
!
control-plane
!
banner motd ^C R3, Implement a GRE Tunnel ^C
!
line con 0
exec-timeout 0 0
logging synchronous
transport input none
stopbits 1
line aux 0
stopbits 1
line vty 0 4
```

Lab - Implement a GRE Tunnel

```
exec-timeout 0 0
privilege level 15
password cisco123
logging synchronous
login
!
end
```