

403 Forbidden

本电子书由CyberArticle制作。点击[这里](#)下载CyberArticle。注册版本不会显示该信息。[删除广告](#)

Console口密码忘记处理方法

目录

[Console口密码忘记处理方法](#)

[1.1 适用产品系列](#)

[1.1.1 不需要之前的配置文件，恢复出厂设置](#)

[1.2 保留原有配置，只修改密码](#)

[1.2.1 以忽略系统当前配置的方式启动](#)

[1.3 适用产品系列](#)

[1.4 保留原有配置，只修改密码](#)

1.1 适用产品系列

本手册适用于如下产品：WAC360、WAC 361、MSG360-4、MSG360-10、MSG360-10P、MSG360-20、MSG360-20N、MSG360-40、WAC380-30、WAC380-60、WAC380-90、WAC380-120、WAC381

胖AP：WAP712C、WAP722E、WAP722S、WAP722、WAP621

1.1.1 不需要之前的配置文件，恢复出厂设置

以下标黑部分为设备自动打印部分，标红加粗的命令是需要手动输入。

System is starting...

Press Ctrl+D to access BASIC-BOOTWARE MENU

Booting Normal Extend BootWare

The Extend BootWare is self-decompressing.....Done!

BootWare Validating...

Press Ctrl+B to enter extended boot menu... //如果看到该提示及时按**Ctrl+B**进入botroom菜单

BotWare password: Not required. Please press Enter to Continue.

Password recovery capability is enabled. //如果看到此提示，则表示设备开启了密码恢复功能。

Note: The current operating device is flash

Enter < Storage Device Operation > to select device.

=====<EXTEND-BOOTWARE

MENU>=====

<1> Boot System	
<2> Enter Serial SubMenu	
<3> Enter Ethernet SubMenu	
<4> File Control	
<5> Restore to Factory Default Configuration	
<6> Skip Current System Configuration	
<7> BootWare Operation Menu	
<8> Clear Super Password	
<9> Storage Device Operation	
<0> Reboot	

=====

Ctrl+Z: Access EXTEND-ASSISTANT MENU

Ctrl+F: Format File System

Enter your choice(0-9): **6** //选择6 跳过配置文件

Flag Set Success.

=====<EXTEND-BOOTWARE

MENU>=====

<1> Boot System	
<2> Enter Serial SubMenu	
<3> Enter Ethernet SubMenu	
<4> File Control	
<5> Restore to Factory Default Configuration	
<6> Skip Current System Configuration	
<7> BootWare Operation Menu	
<8> Clear Super Password	
<9> Storage Device Operation	
<0> Reboot	

=====

Ctrl+Z: Access EXTEND-ASSISTANT MENU

Ctrl+F: Format File System

Enter your choice(0-9): **0** //选择0重启设备

System is starting...

Press ENTER to get started.

跳过启动文件后直接保存当前配置，再重启

<H3C>**save**

The current Configuration will be written to the device. Are you sure? [Y/N]:**y**

Please input the file name(*.cfg)[flash:/startup.cfg]

(To leave the existing filename unchanged, press the enter key): (输入回车)

flash:/startup.cfg exists, overwrite? [Y/N]:**y**

Validating file. Please wait...

Configuration is saved to device successfully.

<H3C>**reboot**

Start to check Configuration with next startup Configuration file, please wait.....DONE!

Current Configuration may be lost after the reboot, save current Configuration? [Y/N]:**y**

This command will reboot the device. Continue? [Y/N]:**y**

重启完成后使用默认配置启动，恢复出厂成功

1.2 保留原有配置，只修改密码

本手册适用于如下产品：WAC360、WAC 361、胖AP：WAP712C、WAP722E、WAP722S、WAP722、WAP621

1.2.1 以忽略系统当前配置的方式启动

以下标黑部分为设备自动打印部分，标红加粗的命令是需要手动输入。

详细配置过程：

System is starting...

Press Ctrl+D to access BASIC-BOOTWARE MENU

Booting Normal Extend BootWare

The Extend BootWare is self-decompressing.....Done!

BootWare Validating...

Press Ctrl+B to enter extended boot menu...//按**Ctrl+B**进入botroom菜单

BotWare password: Not required. Please press Enter to Continue.

Password recovery capability is enabled. //如果看到此提示，则表示设备开启了密码恢复功能。

Note: The current operating device is flash

Enter < Storage Device Operation > to select device.

=====<EXTEND-BOOTWARE

MENU>=====

|<1> Boot System |

|<2> Enter Serial SubMenu |

|<3> Enter Ethernet SubMenu |

```
|<4> File Control |
|<5> Restore to Factory Default Configuration |
|<6> Skip Current System Configuration |
|<7> BootWare Operation Menu |
|<8> Clear Super Password |
|<9> Storage Device Operation |
|<0> Reboot |

=====

Ctrl+Z: Access EXTEND-ASSISTANT MENU
Ctrl+F: Format File System
Enter your choice(0-9): 6 //选择6 跳过配置文件
Flag Set Success.

=====<EXTEND-BOOTWARE
MENU>=====
|<1> Boot System |
|<2> Enter Serial SubMenu |
|<3> Enter Ethernet SubMenu |
|<4> File Control |
|<5> Restore to Factory Default Configuration |
|<6> Skip Current System Configuration |
|<7> BootWare Operation Menu |
|<8> Clear Super Password |
|<9> Storage Device Operation |
|<0> Reboot |

=====

Ctrl+Z: Access EXTEND-ASSISTANT MENU
Ctrl+F: Format File System
Enter your choice(0-9): 0 //选择0重启设备
```

System is starting...

Press ENTER to get started.


<H3C>**dir** //查看设备配置文件：startup.cfg

Directory of flash:/

2 -rw- 1666 Apr 26 2000 12:05:39 **startup.cfg**

29106 KB total (16876 KB free)

给设备和电脑配置成同网段ip地址，举例：WAC配置成192.168.100.1/24，电脑配置成192.168.100.2/24），在电脑上使用3CDaemon软件搭建TFTP服务器，打开3CDaemon服务器，目录指向电脑E盘，然后点击应用。

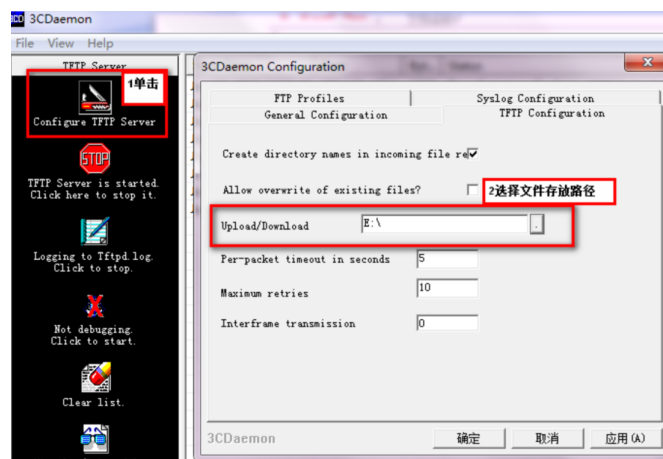

<H3C>**system**

[H3C]**interface Vlan-interface 1**

[H3C-Vlan-interface1]**ip address 192.168.100.1 24**

[H3C-Vlan-interface1]**quit**

[H3C]**ping 192.168.100.2**

PING 192.168.100.2: 56 data bytes, press CTRL_C to break

Reply from 192.168.100.2: bytes=56 Sequence=1 ttl=128 time=7 ms

//提示设备到电脑网络可达

<H3C>**tftp 192.168.100.2 put startup.cfg**

//从设备上下载startup.cfg文件到电脑E盘


File will be transferred in binary mode

Sending file to remote TFTP server. Please wait... |

TFTP: 1666 bytes sent in 0 seCond(s).

File uploaded successfully.

下载成功:

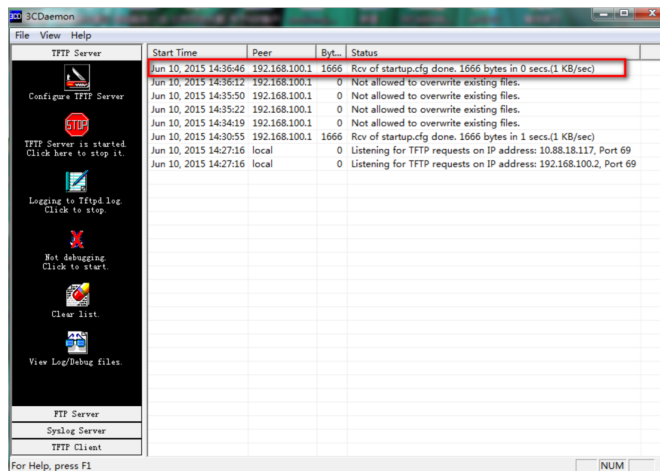

可以到本地相关路径（此例子中是E盘）查看到相关文件。

解决方法:

使用记事本打开startup.cfg文件

```
#
user-interface aux 0
authentication-mode password
set authentication password cipher $c$3
$e0wip+p/tRA8N3EqNk4ZBycpFSthpBEb4A==
user-interface vty 0 15
#
```

删除aux0口下的认证方式和密码并保存文件

```
#
user-interface aux 0
user-interface vty 0 15
#
return
```

覆盖当前配置文件

<H3C>**tftp 192.168.100.20 get startup.cfg**

The file startup.cfg exists. Overwrite it? [Y/N]:**y**

Verifying server file...

Deleting the old file, please wait...

...

File will be transferred in binary mode

Downloading file from remote TFTP server, please wait....

TFTP: 1166 bytes received in 0 seCond(s)

File downloaded successfully.

<H3C>**reboot**

Start to check Configuration with next startup Configuration file, please wait.....DONE!

Current Configuration may be lost after the reboot, save current Configuration? [Y/N]:**n** 不保存配置

This command will reboot the device. Continue? [Y/N]:**y** 确定继续重启

1.3 适用产品系列

本手册适用于如下产品：MSG360-4、MSG360-10、MSG360-10P、MSG360-20、MSG360-20N、MSG360-40、WAC380-30、WAC380-60、WAC380-90、WAC380-120、WAC381

1.4 保留原有配置，只修改密码

从设备中下载startup.cfg到电脑，具体参考：1.2保留原有配置，只修改密码

解决方法：

使用记事本打开startup.cfg文件

```
#
line con 0
authentication-mode password
user-role network-admin
set authentication password sin admin
#
..
```

删除Con0口下的认证方式和密码并保存文件

```
#
line con 0
user-role network-admin
#
```

覆盖当前配置文件

<H3C>**tftp 192.168.100.2 get startup.cfg**

The file startup.cfg exists. Overwrite it? [Y/N]:**y**

Verifying server file...

Deleting the old file, please wait...

...

File will be transferred in binary mode

Downloading file from remote TFTP server, please wait....

TFTP: 1166 bytes received in 0 seCond(s)

File downloaded successfully.

<H3C>**reboot**

Start to check Configuration with next startup Configuration file, please wait.....DONE!

Current Configuration may be lost after the reboot, save current Configuration? [Y/N]:**n** 不保

存配置

This command will reboot the device. Continue? [Y/N]:**y** 确定继续重启