


Lab - Configure Route Redistribution Between EIGRP and OSPF (Instructor Version)

Instructor Note: Red font color or gray highlights indicate text that appears in the instructor copy only.

Topology

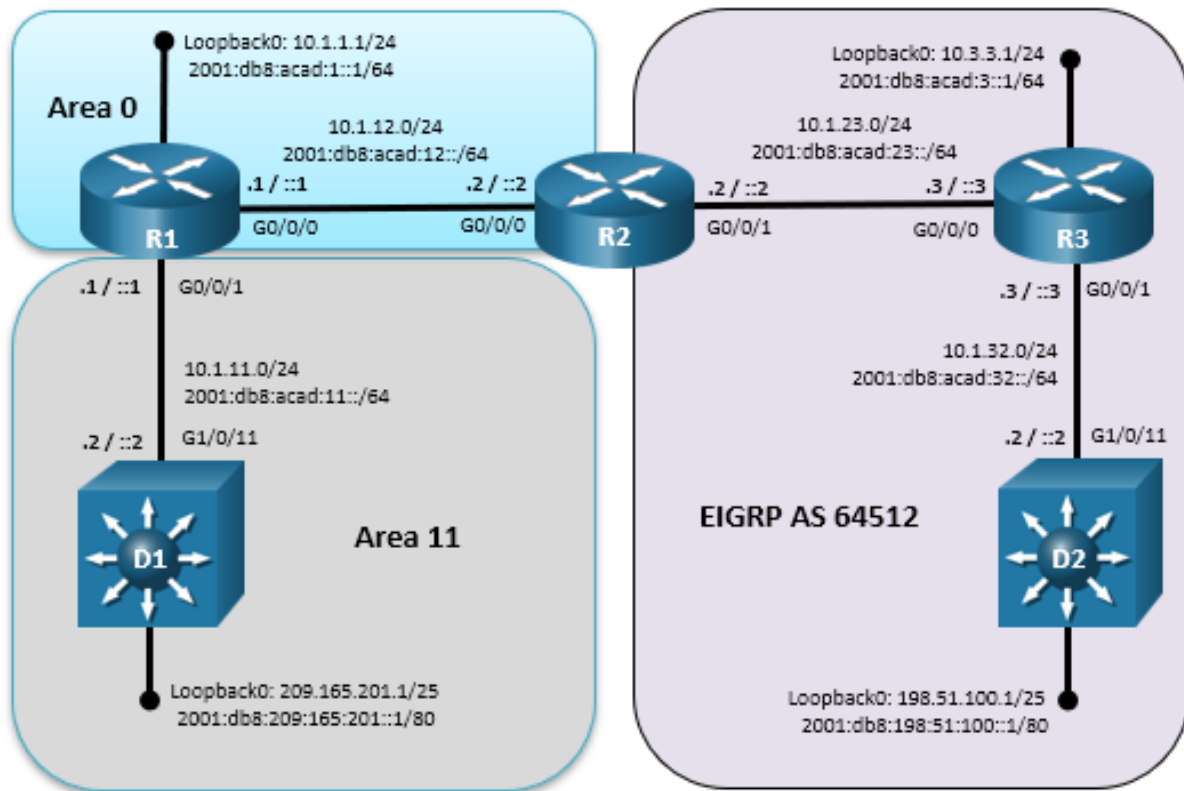

Addressing Table

Device	Interface	IPv4 Address/Mask	IPv6 Address/Prefix	IPv6 Link Local
R1	G0/0/0	10.1.12.1/24	2001:db8:acad:12::1/64	fe80::12:1
	G0/0/1	10.1.11.1/24	2001:db8:acad:11::1/64	fe80::11:1
	Loopback 0	10.1.1.1/24	2001:db8:acad:1::1/64	fe80::1:1
R2	G0/0/0	10.1.12.2/24	2001:db8:acad:12::2/64	fe80::12:2
	G0/0/1	10.1.23.2/24	2001:db8:acad:23::2/64	fe80::23:2
R3	G0/0/0	10.1.23.3/24	2001:db8:acad:23::3/64	fe80::23:3
	G0/0/1	10.1.32.1/24	2001:db8:acad:32::3/64	fe80::32:3
	Loopback 0	10.3.3.3/24	2001:db8:acad:3::3/64	fe80::3:3

Device	Interface	IPv4 Address/Mask	IPv6 Address/Prefix	IPv6 Link Local
D1	G1/0/11	10.1.11.2/24	2001:db8:acad:11::2/64	fe80::11:2
	Loopback 0	209.165.201.1/25	2001:db8:209:165:201::1/80	fe80::209:1
D2	G1/0/11	10.1.32.2/24	2001:db8:acad:32::2/64	fe80::32:2
	Loopback 0	198.51.100.1/25	2001:db8:198:51:100::1/80	fe80::198:1

Objectives

Part 1: Build the Network and Configure Basic Device Settings

Part 2: Verify OSPFv3 AF Neighborships and Routing for IPv4 and IPv6

Part 3: Verify EIGRP Neighborships and Routing for IPv4 and IPv6

Part 4: Configure Redistribution from OSPFv3 to EIGRP

Part 5: Configure Redistribution from EIGRP to OSPFv3

Background / Scenario

In this lab, you will configure redistribution from OSPF into EIGRP for IPv4 and IPv6, and redistribution of EIGRP into OSPF for IPv4 and IPv6. You will also change the metric type for EIGRP routes redistributed into OSPF.

D1, R1 and R2 are configured with OSPFv3 for IPv4 and IPv6 address families, while R2, R3 and D2 are configured with EIGRP using named mode for IPv4 and IPv6 address families.

Note: This lab is an exercise in configuring and verifying two-way route redistribution on R2. Route redistribution in this lab does not reflect networking best practices.

Note: The routers used with CCNP hands-on labs are Cisco 4221 with Cisco IOS XE Release 16.9.4 (universalk9 image). The switches used in the labs are Cisco Catalyst 3650 with Cisco IOS XE Release 16.9.4 (universalk9 image). Other routers, switches, and Cisco IOS versions can be used. Depending on the model and Cisco IOS version, the commands available and the output produced might vary from what is shown in the labs.

Note: Make sure that all the devices have been erased and have no startup configurations. If you are unsure, contact your instructor.

Instructor Note: Refer to the Instructor Lab Manual for the procedures to initialize and reload devices.

Required Resources

- 3 Routers (Cisco 4221 with Cisco IOS XE Release 16.9.4 universal image or comparable)
- 2 Switches (Cisco 3650 with Cisco IOS XE release 16.9.4 universal image or comparable)
- 1 PC (Choice of operating system with terminal emulation program installed)
- Console cables to configure the Cisco IOS devices via the console ports
- Ethernet cables as shown in the topology

Instructions

Part 1: Build the Network and Configure Basic Device Settings

In Part 1, you will set up the network topology and configure basic settings.

Step 1: Cable the network as shown in the topology.

Attach the devices as shown in the topology diagram, and cable as necessary.

Step 2: Configure basic settings for each device.

- a. Console into each device, enter global configuration mode, and apply the basic settings for the lab. Initial configurations for each device are listed below.

Router R1

```
hostname R1
no ip domain lookup
ipv6 unicast-routing
banner motd # R1, Configure Route Redistribution Between EIGRP and OSPF #
line con 0
  exec-timeout 0 0
  logging synchronous
exit
router ospfv3 1
  router-id 1.1.1.1
exit
interface g0/0/0
  ip address 10.1.12.1 255.255.255.0
  ipv6 address FE80::12:1 link-local
  ipv6 address 2001:DB8:ACAD:12::1/64
  ospfv3 1 ipv6 area 0
  ospfv3 1 ipv4 area 0
  no shutdown
exit
interface g0/0/1
  ip address 10.1.11.1 255.255.255.0
  ipv6 address fe80::11:1 link-local
  ipv6 address 2001:db8:acad:11::1/64
  ospfv3 1 ipv6 area 11
  ospfv3 1 ipv4 area 11
  no shutdown
exit
interface loopback 0
  ip address 10.1.1.1 255.255.255.0
  ipv6 address FE80::1:1 link-local
  ipv6 address 2001:DB8:ACAD:1::1/64
  ospfv3 network point-to-point
  ospfv3 1 ipv4 area 0
  ospfv3 1 ipv6 area 0
  no shutdown
exit
router ospfv3 1
```

```
address-family ipv4 unicast
  passive-interface Loopback0
exit-address-family
address-family ipv6 unicast
  passive-interface Loopback0
exit-address-family
end
```

Router R2

```
hostname R2
no ip domain lookup
ipv6 unicast-routing
banner motd # R2, Configure Route Redistribution Between EIGRP and OSPF #
line con 0
  exec-timeout 0 0
  logging synchronous
exit
router ospfv3 1
  router-id 2.2.2.2
  address-family ipv4 unicast
  exit-address-family
address-family ipv6 unicast
  exit-address-family
interface g0/0/0
  ip address 10.1.12.2 255.255.255.0
  ipv6 address FE80::12:2 link-local
  ipv6 address 2001:DB8:ACAD:12::2/64
  ospfv3 1 ipv6 area 0
  ospfv3 1 ipv4 area 0
  no shutdown
exit
interface g0/0/1
  ip address 10.1.23.2 255.255.255.0
  ipv6 address fe80::23:2 link-local
  ipv6 address 2001:db8:acad:23::2/64
  no shutdown
exit
router eigrp CISCO
address-family ipv4 unicast autonomous-system 64512
  af-interface default
  shutdown
exit-af-interface
af-interface GigabitEthernet0/0/1
  no shutdown
exit-af-interface
topology base
```

```
exit-af-topology
network 10.1.23.0 0.0.0.255
eigrp router-id 2.2.2.2
exit-address-family
address-family ipv6 unicast autonomous-system 64512
  af-interface default
    shutdown
  exit-af-interface
  af-interface GigabitEthernet0/0/1
    no shutdown
  exit-af-interface
  topology base
  exit-af-topology
exit-address-family
end
```

Router R3

```
hostname R3
no ip domain lookup
ipv6 unicast-routing
banner motd # R3, Configure Route Redistribution Between EIGRP and OSPF #
line con 0
  exec-timeout 0 0
  logging synchronous
  exit
interface g0/0/0
  ip address 10.1.23.3 255.255.255.0
  ipv6 address fe80::23:3 link-local
  ipv6 address 2001:db8:acad:23::3/64
  no shutdown
  exit
interface g0/0/1
  ip address 10.1.32.3 255.255.255.0
  ipv6 address fe80::32:3 link-local
  ipv6 address 2001:db8:acad:32::3/64
  no shutdown
  exit
interface loopback 0
  ip address 10.3.3.3 255.255.255.0
  ipv6 address fe80::3:3 link-local
  ipv6 address 2001:db8:acad:3::3/64
  no shutdown
  exit
router eigrp CISCO
address-family ipv4 unicast autonomous-system 64512
  af-interface default
```

```
shutdown
exit-af-interface
af-interface GigabitEthernet0/0/0
no shutdown
exit-af-interface
af-interface GigabitEthernet0/0/1
no shutdown
exit-af-interface
af-interface Loopback0
no shutdown
exit-af-interface
topology base
exit-af-topology
network 10.1.23.0 0.0.0.255
network 10.1.32.0 0.0.0.255
network 10.3.3.0 0.0.0.255
eigrp router-id 3.3.3.3
exit-address-family
address-family ipv6 unicast autonomous-system 64512
af-interface default
shutdown
exit-af-interface
af-interface GigabitEthernet0/0/0
no shutdown
exit-af-interface
af-interface GigabitEthernet0/0/1
no shutdown
exit-af-interface
af-interface Loopback0
no shutdown
exit-af-interface
topology base
exit-af-topology
eigrp router-id 3.3.3.3
exit-address-family
end
```

Switch D1

```
hostname D1
no ip domain lookup
ip routing
ipv6 unicast-routing
banner motd # D1, Configure Route Redistribution Between EIGRP and OSPF #
line con 0
exec-timeout 0 0
logging synchronous
```

```
exit
router ospfv3 1
  router-id 11.11.11.11
exit
interface range g1/0/1-24
  shutdown
exit
interface g1/0/11
  no switchport
  ip address 10.1.11.2 255.255.255.0
  ipv6 address fe80::11:2 link-local
  ipv6 address 2001:db8:acad:11::2/64
  ospfv3 1 ipv6 area 11
  ospfv3 1 ipv4 area 11
  no shutdown
exit
interface loopback 0
  ip address 209.165.201.1 255.255.255.128
  ipv6 address fe80::209:1 link-local
  ipv6 address 2001:db8:209:165:201::1/80
  no shutdown
exit
router ospfv3 1
  address-family ipv4 unicast
    passive-interface Loopback0
    default-information originate
  exit-address-family
  address-family ipv6 unicast
    passive-interface Loopback0
    default-information originate
  exit-address-family
ip route 0.0.0.0 0.0.0.0 Loopback0
ipv6 route ::/0 Loopback0
exit
```

Switch D2

```
hostname D2
no ip domain lookup
ip routing
ipv6 unicast-routing
banner motd # D2, Configure Route Redistribution Between EIGRP and OSPF #
line con 0
  exec-timeout 0 0
  logging synchronous
exit
interface range g1/0/1-24
```

```
shutdown
exit
interface g1/0/11
no switchport
ip address 10.1.32.2 255.255.255.0
ipv6 address fe80::32:2 link-local
ipv6 address 2001:db8:acad:32::2/64
no shutdown
exit
interface loopback 0
ip address 198.51.100.1 255.255.255.128
ipv6 address fe80::198:2 link-local
ipv6 address 2001:db8:198:51:100::1/80
no shutdown
router eigrp CISCO
address-family ipv4 unicast autonomous-system 64512
  af-interface default
    shutdown
  exit-af-interface
  af-interface Loopback0
    no shutdown
  passive-interface
  exit-af-interface
  af-interface GigabitEthernet1/0/11
    no shutdown
  exit-af-interface
  topology base
  exit-af-topology
  network 10.1.32.0 0.0.0.255
  network 198.51.100.0 0.0.0.127
  eigrp router-id 22.22.22.22
exit-address-family
address-family ipv6 unicast autonomous-system 64512
  af-interface default
    shutdown
  exit-af-interface
  af-interface Loopback0
    no shutdown
  passive-interface
  exit-af-interface
  af-interface GigabitEthernet1/0/11
    no shutdown
  exit-af-interface
  topology base
  exit-af-topology
```



```
eigrp router-id 22.22.22.22
exit-address-family
exit
```

- b. Set the clock on all devices to UTC time.
- c. Save the running configuration to startup-config on all devices.

Part 2: Verify OSPFv3 AF Neighborships and Routing for IPv4 and IPv6

In this part, you will verify that OSPF has established neighbor relationships and routing for IPv4 and IPv6.

Step 1: Verify OSPFv3 AF neighborships on R1.

- a. Verify R1 has OSPFv3 neighbors: two neighbors from IPv4 address family and two from IPv6 address family.

```
R1# show ospfv3 neighbor
```

```
OSPFv3 1 address-family ipv4 (router-id 1.1.1.1)
```

Neighbor ID	Pri	State	Dead Time	Interface ID	Interface
2.2.2.2	1	FULL/BDR	00:00:36	6	GigabitEthernet0/0/0
11.11.11.11	1	FULL/BDR	00:00:31	38	GigabitEthernet0/0/1

```
OSPFv3 1 address-family ipv6 (router-id 1.1.1.1)
```

Neighbor ID	Pri	State	Dead Time	Interface ID	Interface
2.2.2.2	1	FULL/BDR	00:00:39	6	GigabitEthernet0/0/0
11.11.11.11	1	FULL/BDR	00:00:39	38	GigabitEthernet0/0/1

- b. The output shows four OSPFv3 neighbors: two neighbors from IPv4 address family and two from IPv6 address family.

Step 2: Verify the IPv4 OSPFv3 routing table on R2.

- a. Verify the OSPFv3 IPv4 routing table on R2. Notice the default route, the intra-area, and inter-area OSPF routes are installed and received from 10.1.12.1, which is R1.

```
R2# show ip route ospfv3 | begin Gateway
```

```
Gateway of last resort is 10.1.12.1 to network 0.0.0.0
```

```
O*E2 0.0.0.0/0 [110/1] via 10.1.12.1, 02:41:28, GigabitEthernet0/0/0
    10.0.0.0/8 is variably subnetted, 8 subnets, 2 masks
O 10.1.1.0/24 [110/1] via 10.1.12.1, 02:49:12, GigabitEthernet0/0/0
O IA 10.1.11.0/24 [110/2] via 10.1.12.1, 02:44:58, GigabitEthernet0/0/0
```

- b. From R2, ping the Loopback 0 address on D1. The ping should be successful.

```
R2# ping 209.165.201.1
```

```
Type escape sequence to abort.
```

```
Sending 5, 100-byte ICMP Echos to 209.165.201.1, timeout is 2 seconds:
```

```
!!!!
```

```
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/2 ms
```

Step 3: Verify IPv6 OSPFv3 routing table on R2.

- Verify the OSPFv3 IPv4 routing table on R2. Notice the default route, the intra-area, and inter-area OSPF routes are installed and received from fe80::12:1, which is R1.

```
R2# show ipv6 route ospf
< some output omitted >
OE2 ::/0 [110/1], tag 1
    via FE80::12:1, GigabitEthernet0/0/0
O   2001:DB8:ACAD:1::/64 [110/2]
    via FE80::12:1, GigabitEthernet0/0/0
OI  2001:DB8:ACAD:11::/64 [110/2]
    via FE80::12:1, GigabitEthernet0/0/0
```

- From R2, ping the IPv6 Loopback 0 address on D1. The ping should be successful.

```
R2# ping 2001:db8:209:165:201::1
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 2001:DB8:209:165:201::1, timeout is 2 seconds:
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/3 ms
```

- The output for the ping in the previous step and this step confirms that R2 has learned OSPFv3 routes for IPv4 and IPv6, including a default route for IPv4 and IPv6. The output also confirms R2 can ping the Loopback 0 address from both IPv4 and IPv6.

Part 3: Verify EIGRP Neighborships and Routing for IPv4 and IPv6

In this part, you will verify that EIGRP has established neighbor relationships and routing for IPv4 and IPv6.

Step 1: Verify EIGRP for IPv4 neighborships on R3.

Issue the command to verify EIGRP has two IPv4 neighbors, as shown.

```
R3# show ip eigrp neighbors
EIGRP-IPv4 VR(CISCO) Address-Family Neighbors for AS(64512)
H   Address                               Interface           Hold Uptime    SRTT    RTO    QSeq
                               (sec)           (ms)          CntNum
1   10.1.32.2                             Gi0/0/1            10 20:13:56     3    100    013
0   10.1.23.2                             Gi0/0/0            13 20:31:08     1    100    019
```

Notice the two IPv4 neighbors, 10.1.23.2 and 10.1.32.2.

Step 2: Verify the EIGRP for IPv6 neighborships on R3.

Issue the command to verify EIGRP has two IPv6 neighbors, as shown.

```
R3# show ipv6 eigrp neighbors
EIGRP-IPv6 VR(CISCO) Address-Family Neighbors for AS(64512)
H   Address                               Interface           Hold Uptime    SRTT    RTO    QSeq
                               (sec)           (ms)          CntNum
1   Link-local address:                   Gi0/0/1            13 20:13:20     3    100    09
    FE80::32:2
0   Link-local address:                   Gi0/0/0            11 20:32:08     1    100    019
    FE80::23:2
```

Notice the two IPv6 neighbors, fe80::23:2 and fe80::32:2.

Step 3: Verify EIGRP for IPv4 routing table on R2.

Issue the command to display the EIGRP IPv4 routing table on R2, as shown.

```
R2# show ip route eigrp | begin 10.0
    10.0.0.0/8 is variably subnetted, 8 subnets, 2 masks
D       10.1.32.0/24 [90/15360] via 10.1.23.3, 20:35:38, GigabitEthernet0/0/1
D       10.3.3.0/24 [90/10880] via 10.1.23.3, 20:44:06, GigabitEthernet0/0/1
    198.51.100.0/25 is subnetted, 1 subnets
D       198.51.100.0 [90/16000] via 10.1.23.3, 20:29:04, GigabitEthernet0/0/1
```

Notice three internal EIGRP routes from 10.1.23.3, which is R3.

Step 4: Verify EIGRP for IPv6 routing table on R2.

Issue the command to display the IPv6 EIGRP routing table on R2, as shown.

```
R2# show ipv6 route eigrp | begin 2001
D       2001:DB8:198:51:100::/80 [90/16000]
    via FE80::23:3, GigabitEthernet0/0/1
D       2001:DB8:ACAD:3::/64 [90/10880]
    via FE80::23:3, GigabitEthernet0/0/1
D       2001:DB8:ACAD:32::/64 [90/15360]
    via FE80::23:3, GigabitEthernet0/0/1
```

The output above confirms R2 has learned EIGRP routes for IPv4 and IPv6.

Part 4: Configure Redistribution from OSPFv3 to EIGRP

Recall that every protocol provides a seed metric at the time of redistribution. By default, when source protocols, such as, OSPF, RIP, and IS-IS, are redistributed into EIGRP, they are given an administrative distance of 170 and a seed metric of infinity. This prevents the installation of the redistributed routes into the EIGRP topology table. The seed metric can be set using the **redistribute** or **default-metric** command. Additionally, when using a route map, the seed metric can be configured using the **set metric** option.

For IPv4, you will set the seed metric using the **redistribute** command and the **default-metric** command.

Step 1: Redistribute OSPFv3 into EIGRP for IPv4.

In this step we are going to the destination EIGRP AS 64512 to perform redistribution. Since EIGRP is using named mode the **redistribute** command is entered in the address family topology configuration mode, as shown.

```
R2(config)# router eigrp CISCO
R2(config-router)# address-family ipv4 autonomous-system 64512
R2(config-router-af)# topology base
R2(config-router-af-topology)# redistribute ospfv3 1 metric 1000000 10 255 1 1500
R2(config-router-af-topology)# end
```

Step 2: On D2, verify redistribution of OSPFv3.

Issue the **show ip route eigrp** on D2 to see the external EIGRP routes from OSPFv3.

```
D2# show ip route eigrp | begin Gateway
Gateway of last resort is 10.1.32.3 to network 0.0.0.0

D*EX 0.0.0.0/0 [170/66560] via 10.1.32.3, 00:03:59, GigabitEthernet1/0/11
    10.0.0.0/8 is variably subnetted, 7 subnets, 2 masks
```

```
D EX    10.1.1.0/24
        [170/66560] via 10.1.32.3, 00:03:59, GigabitEthernet1/0/11
D EX    10.1.11.0/24
        [170/66560] via 10.1.32.3, 00:03:59, GigabitEthernet1/0/11
D EX    10.1.12.0/24
        [170/66560] via 10.1.32.3, 00:03:59, GigabitEthernet1/0/11
D       10.1.23.0/24
        [90/15360] via 10.1.32.3, 21:20:07, GigabitEthernet1/0/11
D       10.3.3.0/24 [90/10880] via 10.1.32.3, 21:20:07, GigabitEthernet1/0/11
```

Notice the gateway of last resort has been set and D2 has learned four external EIGRP routes which originated from OSPFv3. The OSPFv3 routes are imported into EIGRP as external, D EX routes with an administrative distance of 170, which are higher than the internal EIGRP routes of 90.

Step 3: Redistribute OSPFv3 into EIGRP for IPv6.

Again, go to the destination protocol to perform redistribution. In this example you will set the seed metric using the **default-metric** command. Both commands are configured in the IPv6 address-family topology base, as shown.

```
R2(config)# router eigrp CISCO
R2(config-router)# address-family ipv6 autonomous-system 64512
R2(config-router-af)# topology base
R2(config-router-af-topology)# default-metric 1000000 10 255 1 1500
R2(config-router-af-topology)# redistribute ospf 1
```

Note: Do not leave AF topology configuration mode.

In the example above, the seed metric was set using the **default-metric** command.

Notice the **include-connected** option was not configured using the **redistribute ospf 1** command. The **include-connected** command must be set for OSPFv3 IPv6 connected interface on R2, in our example, 2001:db8:acad:12::/64 to be redistributed into EIGRP. With IPv4, connected interfaces are automatically advertised into the routing protocol for connected interfaces the source protocol is advertising. For IPv6, the administrator decides whether the connected subnets are included into redistribution.

Also notice under the EIGRP IPv6 address family, it is not possible to specify OSPFv3 as the source protocol for redistribution. Instead the **ospf** keyword automatically assumes OSPFv3 since the command is entered under the IPv6 address family.

Step 4: On D2 Verify OSPFv3 redistribution for IPv6.

Issue the command to view the IPv6 routing table for EIGRP.

```
D2# show ipv6 route eigrp | begin EX ::
EX  ::/0 [170/66560], tag 1
    via FE80::32:3, GigabitEthernet1/0/11
EX  2001:DB8:ACAD:1::/64 [170/66560]
    via FE80::32:3, GigabitEthernet1/0/11
D   2001:DB8:ACAD:3::/64 [90/10880]
    via FE80::32:3, GigabitEthernet1/0/11
EX  2001:DB8:ACAD:11::/64 [170/66560]
    via FE80::32:3, GigabitEthernet1/0/11
D   2001:DB8:ACAD:23::/64 [90/15360]
    via FE80::32:3, GigabitEthernet1/0/11
```

Notice the three highlighted external routes. The 2001:db8:acad:12::/64 prefix was not redistributed because of the missing **include-connected** keyword.

Step 5: Redistribute OSPFv3 connected routes into EIGRP for IPv6.

- From the EIGRP IPv6 address family topology configuration mode configure redistribution with the same command as the previous step, but this time add **include-connected** as shown.

```
R2(config-router-af-topology)# redistribute ospf 1 include-connected
R2(config-router-af-topology)# end
```

- On D2, verify the IPv6 prefixes are being redistributed as before, as well as the connected prefix, which is included and highlighted in the routing table.

```
D2# show ipv6 route eigrp | begin EX ::
EX ::/0 [170/66560], tag 1
    via FE80::32:3, GigabitEthernet1/0/11
EX 2001:DB8:ACAD:1::/64 [170/66560]
    via FE80::32:3, GigabitEthernet1/0/11
D 2001:DB8:ACAD:3::/64 [90/10880]
    via FE80::32:3, GigabitEthernet1/0/11
EX 2001:DB8:ACAD:11::/64 [170/66560]
    via FE80::32:3, GigabitEthernet1/0/11
EX 2001:DB8:ACAD:12::/64 [170/66560]
    via FE80::32:3, GigabitEthernet1/0/11
D 2001:DB8:ACAD:23::/64 [90/15360]
    via FE80::32:3, GigabitEthernet1/0/11
```

Part 5: Configure Redistribution from EIGRP for IPv4 into OSPFv3

In this part, you will perform EIGRP for IPv4 redistribution into OSPFv3.

Note: When redistributing into OSPFv2, you must include the **subnets** keyword. The keyword **subnets** is required for classless networks to be advertised. If omitted only classful networks using a classful mask will be redistributed.

Step 1: On R2, redistribute EIGRP into OSPFv3.

The **redistribute** command is always performed on the destination protocol. Start by accessing the OSPFv3 address family for IPv4. Then redistribute the source protocol, EIGRP 64512 into the destination protocol, as shown.

```
R2(config)# router ospfv3 1
R2(config-router)# address-family ipv4 unicast
R2(config-router-af)# redistribute eigrp 64512
```

Note: Do not leave AF configuration mode.

Step 2: Verify redistribution on D1.

Issue the **show ip route ospfv3** on D1 to see the external OSPF routes from EIGRP.

```
D1# show ip route ospfv3 | begin Gateway
Gateway of last resort is 0.0.0.0 to network 0.0.0.0

    10.0.0.0/8 is variably subnetted, 7 subnets, 2 masks
O IA    10.1.1.0/24 [110/2] via 10.1.11.1, 02:52:36, GigabitEthernet1/0/11
```

```
O IA      10.1.12.0/24 [110/2] via 10.1.11.1, 1d01h, GigabitEthernet1/0/11
O E2      10.1.23.0/24 [110/20] via 10.1.11.1, 00:03:55, GigabitEthernet1/0/11
O E2      10.1.32.0/24 [110/20] via 10.1.11.1, 00:03:55, GigabitEthernet1/0/11
O E2      10.3.3.0/24 [110/20] via 10.1.11.1, 00:03:55, GigabitEthernet1/0/11
          198.51.100.0/25 is subnetted, 1 subnets
O E2      198.51.100.0 [110/20] via 10.1.11.1, 00:03:55, GigabitEthernet1/0/11
```

Notice the highlighted external E2 OSPF routes. By default, external LSAs appear in the routing table marked as E2 with an external cost of 20.

Step 3: Redistribute EIGRP into OSPFv3 using a Type 1.

From the address family configuration mode, modify the **redistribute** command configured in Step 1 to specify an external type 1.

```
R2(config-router-af)# redistribute eigrp 64512 metric-type ?
  1 Set OSPF External Type 1 metrics
  2 Set OSPF External Type 2 metrics

R2(config-router-af)# redistribute eigrp 64512 metric-type 1
R2(config-router-af)# exit
```

Step 4: Verify redistribution again on D1.

- a. Issue the **show ip route ospfv3** on D1 to see the external OSPF routes.

```
D1# show ip route ospfv3 | begin Gateway
Gateway of last resort is 0.0.0.0 to network 0.0.0.0

      10.0.0.0/8 is variably subnetted, 7 subnets, 2 masks
O IA      10.1.1.0/24 [110/2] via 10.1.11.1, 03:10:29, GigabitEthernet1/0/11
O IA      10.1.12.0/24 [110/2] via 10.1.11.1, 1d02h, GigabitEthernet1/0/11
O E1      10.1.23.0/24 [110/22] via 10.1.11.1, 00:10:11, GigabitEthernet1/0/11
O E1      10.1.32.0/24 [110/22] via 10.1.11.1, 00:10:11, GigabitEthernet1/0/11
O E1      10.3.3.0/24 [110/22] via 10.1.11.1, 00:10:11, GigabitEthernet1/0/11
          198.51.100.0/25 is subnetted, 1 subnets
O E1      198.51.100.0 [110/22] via 10.1.11.1, 00:10:11, GigabitEthernet1/0/11
```

Notice the highlighted external E1 OSPF routes. These E1 routes have a cost of 22 which includes the default cost of 20 plus the internal cost of 2.

- b. From D2 ping the Loopback address on D1 using Loopback address of D2. The ping should be successful. This verifies successful two-way redistribution on R2 and end-to-end connectivity for IPv4.

```
D2# ping 209.165.201.1 source loopback 0
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 209.165.201.1, timeout is 2 seconds:
Packet sent with a source address of 198.51.100.1
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 2/2/3 ms
```

Step 5: Configure redistribution of EIGRP for IPv6 routes into OSPFv3 using a route map.

Next, you will redistribute EIGRP for IPv6 routes into OSPFv3 using a route map to set the external LSA to a metric type 1, or E1.

- a. First, you create a route map name **E20** with a permit statement using a sequence number of 10. Because you are not going to use the **match** command, the default action is to match all. Then you set the metric type to an E1, or m, as shown.

```
R2(config)# route-map E20 permit 10
R2(config-route-map)# set metric-type type-1
R2(config-route-map)# exit
```

- b. Next, you access the OSPFv3 IPv6 address family. Then you issue the **redistribute** command and specify the route map name. Ensure to add the **include-connected** after the route map name, as shown.

```
R2(config)# router ospfv3 1
R2(config-router)# address-family ipv6
R2(config-router-af)# redistribute eigrp 64512 route-map E20 include-connected
R2(config-router-af)# exit
```

The route map **E20** will match all redistributed routes, including connected interfaces advertised in EIGRP 64512.

Step 6: On D1 verify that routes from EIGRP for IPv6 are imported into OSPFv3 with the external metric type 1.

- a. Issue the **show ipv6 route ospf** on D1 to see the external EIGRP routes. Notice the highlighted external E1 OSPF routes.

```
D1# show ipv6 route ospf
< output omitted >
OE1 2001:DB8:198:51:100::/80 [110/22]
    via FE80::11:1, GigabitEthernet1/0/11
OI 2001:DB8:ACAD:1::/64 [110/2]
    via FE80::11:1, GigabitEthernet1/0/11
OE1 2001:DB8:ACAD:3::/64 [110/22]
    via FE80::11:1, GigabitEthernet1/0/11
OI 2001:DB8:ACAD:12::/64 [110/2]
    via FE80::11:1, GigabitEthernet1/0/11
OE1 2001:DB8:ACAD:23::/64 [110/22]
    via FE80::11:1, GigabitEthernet1/0/11
OE1 2001:DB8:ACAD:32::/64 [110/22]
    via FE80::11:1, GigabitEthernet1/0/11
```

- b. From D2, ping the Loopback address on D1 using Loopback address of D2. The ping should be successful. This verifies full successful two-way redistribution on R2 and end-to-end connectivity for IPv6.

```
D2# ping 2001:db8:209:165:201::1 source loopback 0
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 2001:DB8:209:165:201::1, timeout is 2 seconds:
Packet sent with a source address of 2001:DB8:198:51:100::1
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 2/4/9 ms
```

Reflection Questions

1. What is the difference between an external OSPF E2 and E1?

OSPF metric type E2 is the default, if not specified. An E2 has an external cost of 20. Metric type 1 or E1 calculates the cost by adding the external cost to the internal cost for each link the packet traverses. Use an E1 when there are multiple ASBRs advertising an external route to the same AS.

2. What are three ways to set a seed metric during redistribution?

Using the redistribute command, using the default-metric command and using a route map with the set metric command

3. What is the default action in a route map if you do not include the match command?

The default action is to match any

Router Interface Summary Table

Router Model	Ethernet Interface #1	Ethernet Interface #2	Serial Interface #1	Serial Interface #2
1800	Fast Ethernet 0/0 (F0/0)	Fast Ethernet 0/1 (F0/1)	Serial 0/0/0 (S0/0/0)	Serial 0/0/1 (S0/0/1)
1900	Gigabit Ethernet 0/0 (G0/0)	Gigabit Ethernet 0/1 (G0/1)	Serial 0/0/0 (S0/0/0)	Serial 0/0/1 (S0/0/1)
2801	Fast Ethernet 0/0 (F0/0)	Fast Ethernet 0/1 (F0/1)	Serial 0/1/0 (S0/1/0)	Serial 0/1/1 (S0/1/1)
2811	Fast Ethernet 0/0 (F0/0)	Fast Ethernet 0/1 (F0/1)	Serial 0/0/0 (S0/0/0)	Serial 0/0/1 (S0/0/1)
2900	Gigabit Ethernet 0/0 (G0/0)	Gigabit Ethernet 0/1 (G0/1)	Serial 0/0/0 (S0/0/0)	Serial 0/0/1 (S0/0/1)
4221	Gigabit Ethernet 0/0/0 (G0/0/0)	Gigabit Ethernet 0/0/1 (G0/0/1)	Serial 0/1/0 (S0/1/0)	Serial 0/1/1 (S0/1/1)
4300	Gigabit Ethernet 0/0/0 (G0/0/0)	Gigabit Ethernet 0/0/1 (G0/0/1)	Serial 0/1/0 (S0/1/0)	Serial 0/1/1 (S0/1/1)

Note: To find out how the router is configured, look at the interfaces to identify the type of router and how many interfaces the router has. There is no way to effectively list all the combinations of configurations for each router class. This table includes identifiers for the possible combinations of Ethernet and Serial interfaces in the device. The table does not include any other type of interface, even though a specific router may contain one. An example of this might be an ISDN BRI interface. The string in parenthesis is the legal abbreviation that can be used in Cisco IOS commands to represent the interface.

Device Configs – Final

Router R1

```
R1# show run
Building configuration...
```

```
Current configuration : 2238 bytes
```


Lab - Configure Route Redistribution Between EIGRP and OSPF

```
!  
version 16.9  
service timestamps debug datetime msec  
service timestamps log datetime msec  
platform qfp utilization monitor load 80  
no platform punt-keepalive disable-kernel-core  
!  
hostname R1  
!  
boot-start-marker  
boot-end-marker  
!  
no aaa new-model  
!  
no ip domain lookup  
!  
subscriber templating  
!  
ipv6 unicast-routing  
multilink bundle-name authenticated  
!  
spanning-tree extend system-id  
!  
redundancy  
mode none  
!  
interface Loopback0  
ip address 10.1.1.1 255.255.255.0  
ipv6 address FE80::1:1 link-local  
ipv6 address 2001:DB8:ACAD:1::1/64  
ospfv3 network point-to-point  
ospfv3 1 ipv4 area 0  
ospfv3 1 ipv6 area 0  
!  
interface GigabitEthernet0/0/0  
ip address 10.1.12.1 255.255.255.0  
negotiation auto  
ipv6 address FE80::12:1 link-local  
ipv6 address 2001:DB8:ACAD:12::1/64  
ospfv3 1 ipv6 area 0  
ospfv3 1 ipv4 area 0  
!  
interface GigabitEthernet0/0/1  
ip address 10.1.11.1 255.255.255.0  
negotiation auto  
ipv6 address FE80::11:1 link-local  
ipv6 address 2001:DB8:ACAD:11::1/64  
ospfv3 1 ipv4 area 11  
ospfv3 1 ipv6 area 11  
!
```

Lab - Configure Route Redistribution Between EIGRP and OSPF

```
interface Serial0/1/0
no ip address
!
interface Serial0/1/1
no ip address
!
router ospfv3 1
router-id 1.1.1.1
!
address-family ipv4 unicast
passive-interface Loopback0
exit-address-family
!
address-family ipv6 unicast
passive-interface Loopback0
exit-address-family
!
ip forward-protocol nd
no ip http server
ip http secure-server
control-plane
!
banner motd ^C R1, Configure Route Redistribution Between EIGRP and OSPF ^C
!
line con 0
exec-timeout 0 0
logging synchronous
transport input none
stopbits 1
line aux 0
stopbits 1
line vty 0 4
login
!
end
```

Router R2

```
R2# show running-config
Building configuration...
```

```
Current configuration : 2716 bytes
!
version 16.6
service timestamps debug datetime msec
service timestamps log datetime msec
platform qfp utilization monitor load 80
no platform punt-keepalive disable-kernel-core
!
```

Lab - Configure Route Redistribution Between EIGRP and OSPF

```
hostname R2
!
boot-start-marker
boot-end-marker
!
no aaa new-model
!
no ip domain lookup
!
login on-success log
!
subscriber templating
!
ipv6 unicast-routing
multilink bundle-name authenticated
!
spanning-tree extend system-id
!
redundancy
mode none
!
interface GigabitEthernet0/0/0
 ip address 10.1.12.2 255.255.255.0
 negotiation auto
 ipv6 address FE80::12:2 link-local
 ipv6 address 2001:DB8:ACAD:12::2/64
 ospfv3 1 ipv4 area 0
 ospfv3 1 ipv6 area 0
!
interface GigabitEthernet0/0/1
 ip address 10.1.23.2 255.255.255.0
 negotiation auto
 ipv6 address FE80::23:2 link-local
 ipv6 address 2001:DB8:ACAD:23::2/64
!
router eigrp CISCO
!
 address-family ipv4 unicast autonomous-system 64512
!
  af-interface default
    shutdown
  exit-af-interface
!
  af-interface GigabitEthernet0/0/1
    no shutdown
  exit-af-interface
!
 topology base
 redistribute ospfv3 1 metric 1000000 10 255 1 1500
 exit-af-topology
```

Lab - Configure Route Redistribution Between EIGRP and OSPF

```
network 10.1.23.0 0.0.0.255
eigrp router-id 2.2.2.2
exit-address-family
!
address-family ipv6 unicast autonomous-system 64512
!
af-interface default
shutdown
exit-af-interface
!
af-interface GigabitEthernet0/0/1
no shutdown
exit-af-interface
!
topology base
default-metric 1000000 10 255 1 1500
redistribute ospf 1 include-connected
exit-af-topology
exit-address-family
!
router ospfv3 1
router-id 2.2.2.2
!
address-family ipv4 unicast
redistribute eigrp 64512 metric-type 1
exit-address-family
!
address-family ipv6 unicast
redistribute eigrp 64512 route-map E20 include-connected
exit-address-family
!
ip forward-protocol nd
no ip http server
ip http secure-server
!
route-map E20 permit 10
set metric-type type-1
!
control-plane
!
banner motd ^C R2, Configure Route Redistribution Between EIGRP and OSPF ^C
!
line con 0
exec-timeout 0 0
logging synchronous
transport input none
stopbits 1
line aux 0
stopbits 1
line vty 0 4
```

```
login
!  
end
```

Router R3

```
R3# show running-config
```

```
Building configuration...
```

```
Current configuration : 2770 bytes
!  
version 16.6  
service timestamps debug datetime msec  
service timestamps log datetime msec  
platform qfp utilization monitor load 80  
no platform punt-keepalive disable-kernel-core  
!  
hostname R3  
!  
boot-start-marker  
boot-end-marker  
!  
no aaa new-model  
!  
no ip domain lookup  
!  
login on-success log  
!  
subscriber templating  
!  
ipv6 unicast-routing  
multilink bundle-name authenticated  
!  
Spanning-tree extend system-id  
!  
redundancy  
mode none  
!  
interface Loopback0  
ip address 10.3.3.3 255.255.255.0  
ipv6 address FE80::3:3 link-local  
ipv6 address 2001:DB8:ACAD:3::3/64  
!  
interface GigabitEthernet0/0/0  
ip address 10.1.23.3 255.255.255.0  
negotiation auto  
ipv6 address FE80::23:3 link-local  
ipv6 address 2001:DB8:ACAD:23::3/64  
!
```

Lab - Configure Route Redistribution Between EIGRP and OSPF

```
interface GigabitEthernet0/0/1
 ip address 10.1.32.3 255.255.255.0
 negotiation auto
 ipv6 address FE80::32:3 link-local
 ipv6 address 2001:DB8:ACAD:32::3/64
!
interface Serial0/1/0
 no ip address
!
interface Serial0/1/1
 no ip address
!
router eigrp CISCO
!
 address-family ipv4 unicast autonomous-system 64512
!
  af-interface default
    shutdown
  exit-af-interface
!
  af-interface GigabitEthernet0/0/0
    no shutdown
  exit-af-interface
!
  af-interface GigabitEthernet0/0/1
    no shutdown
  exit-af-interface
!
  af-interface Loopback0
    no shutdown
  exit-af-interface
!
 topology base
 exit-af-topology
 network 10.1.23.0 0.0.0.255
 network 10.1.32.0 0.0.0.255
 network 10.3.3.0 0.0.0.255
 eigrp router-id 3.3.3.3
 exit-address-family
!
 address-family ipv6 unicast autonomous-system 64512
!
  af-interface default
    shutdown
  exit-af-interface
!
  af-interface GigabitEthernet0/0/0
    no shutdown
  exit-af-interface
!
```

Lab - Configure Route Redistribution Between EIGRP and OSPF

```
af-interface GigabitEthernet0/0/1
  no shutdown
exit-af-interface
!
af-interface Loopback0
  no shutdown
exit-af-interface
!
topology base
exit-af-topology
  eigrp router-id 3.3.3.3
exit-address-family
!
ip forward-protocol nd
no ip http server
ip http secure-server
!
control-plane
!
banner motd ^C R3, Configure Route Redistribution Between EIGRP and OSPF ^C
!
line con 0
  exec-timeout 0 0
  logging synchronous
  transport input none
stopbits 1
line aux 0
  stopbits 1
line vty 0 4
  login
end
```

Switch D1

```
D1# show running-config
Building configuration...

Current configuration : 4574 bytes
!
version 16.9
no service pad
service timestamps debug datetime msec
service timestamps log datetime msec
! Call-home is enabled by Smart-Licensing.
service call-home
no platform punt-keepalive disable-kernel-core
!
hostname D1
!
vrf definition Mgmt-vrf
```

```
!  
address-family ipv4  
exit-address-family  
!  
address-family ipv6  
exit-address-family  
!  
no aaa new-model  
switch 1 provision ws-c3650-24ps  
!  
ip routing  
!  
no ip domain lookup  
!  
ipv6 unicast-routing  
!  
diagnostic bootup level minimal  
spanning-tree mode rapid-pvst  
spanning-tree extend system-id  
!  
redundancy  
mode sso  
!  
transceiver type all  
monitoring  
!  
class-map match-any system-cpp-police-topology-control  
description Topology control  
class-map match-any system-cpp-police-sw-forward  
description Sw forwarding, L2 LVX data, LOGGING  
class-map match-any system-cpp-default  
description DHCP Snooping, EWLC control, EWCL data  
class-map match-any system-cpp-police-sys-data  
description Learning cache ovfl, Crypto Control, Exception, EGR Exception, NFL  
SAMPLED DATA, RPF Failed  
class-map match-any system-cpp-police-punt-webauth  
description Punt Webauth  
class-map match-any system-cpp-police-l2lvx-control  
description L2 LVX control packets  
class-map match-any system-cpp-police-forus  
description Forus Address resolution and Forus traffic  
class-map match-any system-cpp-police-multicast-end-station  
description MCAST END STATION  
class-map match-any system-cpp-police-multicast  
description Transit Traffic and MCAST Data  
class-map match-any system-cpp-police-l2-control  
description L2 control  
class-map match-any system-cpp-police-dot1x-auth  
description DOT1X Auth  
class-map match-any system-cpp-police-data
```


Lab - Configure Route Redistribution Between EIGRP and OSPF

```
description ICMP redirect, ICMP_GEN and BROADCAST
class-map match-any system-cpp-police-stackwise-virt-control
description Stackwise Virtual
class-map match-any non-client-nrt-class
class-map match-any system-cpp-police-routing-control
description Routing control
class-map match-any system-cpp-police-protocol-snooping
description Protocol snooping
class-map match-any system-cpp-police-system-critical
description System Critical and Gold
!
policy-map system-cpp-policy
!
interface Loopback0
ip address 209.165.201.1 255.255.255.128
ipv6 address FE80::209:1 link-local
ipv6 address 2001:DB8:209:165:201::1/80
!
interface GigabitEthernet0/0
vrf forwarding Mgmt-vrf
no ip address
speed 1000
negotiation auto
!
interface GigabitEthernet1/0/1
shutdown
!
interface GigabitEthernet1/0/2
shutdown
!
interface GigabitEthernet1/0/3
shutdown
!
interface GigabitEthernet1/0/4
shutdown
!
interface GigabitEthernet1/0/5
shutdown
!
interface GigabitEthernet1/0/6
shutdown
!
interface GigabitEthernet1/0/7
shutdown
!
interface GigabitEthernet1/0/8
shutdown
!
interface GigabitEthernet1/0/9
shutdown
```

```
!  
interface GigabitEthernet1/0/10  
shutdown  
!  
interface GigabitEthernet1/0/11  
no switchport  
ip address 10.1.11.2 255.255.255.0  
ipv6 address FE80::11:2 link-local  
ipv6 address 2001:DB8:ACAD:11::2/64  
ospfv3 1 ipv6 area 11  
ospfv3 1 ipv4 area 11  
!  
interface GigabitEthernet1/0/12  
shutdown  
!  
interface GigabitEthernet1/0/13  
shutdown  
!  
interface GigabitEthernet1/0/14  
shutdown  
!  
interface GigabitEthernet1/0/15  
shutdown  
!  
interface GigabitEthernet1/0/16  
shutdown  
!  
interface GigabitEthernet1/0/17  
shutdown  
!  
interface GigabitEthernet1/0/18  
shutdown  
!  
interface GigabitEthernet1/0/19  
shutdown  
!  
interface GigabitEthernet1/0/20  
shutdown  
!  
interface GigabitEthernet1/0/21  
shutdown  
!  
interface GigabitEthernet1/0/22  
shutdown  
!  
interface GigabitEthernet1/0/23  
shutdown  
!  
interface GigabitEthernet1/0/24  
shutdown
```

Lab - Configure Route Redistribution Between EIGRP and OSPF

```
!  
interface GigabitEthernet1/1/1  
!  
interface GigabitEthernet1/1/2  
!  
interface GigabitEthernet1/1/3  
!  
interface GigabitEthernet1/1/4  
!  
interface Vlan1  
  no ip address  
!  
router ospfv3 1  
  router-id 11.11.11.11  
!  
  address-family ipv4 unicast  
    passive-interface Loopback0  
    default-information originate  
  exit-address-family  
!  
  address-family ipv6 unicast  
    passive-interface Loopback0  
    default-information originate  
  exit-address-family  
!  
ip forward-protocol nd  
ip http server  
ip http secure-server  
ip route 0.0.0.0 0.0.0.0 Loopback0  
!  
ipv6 route ::/0 Loopback0  
!  
control-plane  
  service-policy input system-cpp-policy  
!  
banner motd ^C D1, Configure Route Redistribution Between EIGRP and OSPF ^C  
!  
line con 0  
  exec-timeout 0 0  
  logging synchronous  
  stopbits 1  
line aux 0  
  stopbits 1  
line vty 0 4  
  login  
line vty 5 15  
  login  
!  
end
```

Switch D2

```
D2# show running-config
```

```
Building configuration...
```

```
Current configuration : 4972 bytes
```

```
!  
version 16.6  
no service pad  
service timestamps debug datetime msec  
service timestamps log datetime msec  
no platform punt-keepalive disable-kernel-core  
!  
hostname D2  
!  
vrf definition Mgmt-vrf  
!  
  address-family ipv4  
  exit-address-family  
!  
  address-family ipv6  
  exit-address-family  
!  
no aaa new-model  
switch 1 provision ws-c3650-24ps  
!  
ip routing  
!  
no ip domain lookup  
!  
ipv6 unicast-routing  
!  
diagnostic bootup level minimal  
spanning-tree mode rapid-pvst  
spanning-tree extend system-id  
!  
redundancy  
  mode sso  
!  
transceiver type all  
  monitoring  
!  
class-map match-any system-cpp-police-topology-control  
  description Topology control  
class-map match-any system-cpp-police-sw-forward  
  description Sw forwarding, L2 LVX data, LOGGING  
class-map match-any system-cpp-default  
  description DHCP Snooping, EWLC control, EWCL data  
class-map match-any system-cpp-police-sys-data
```

Lab - Configure Route Redistribution Between EIGRP and OSPF

```
description Learning cache ovfl, Crypto Control, Exception, EGR Exception, NFL
SAMPLED DATA, RPF Failed
class-map match-any system-cpp-police-punt-webauth
description Punt Webauth
class-map match-any system-cpp-police-l2lvx-control
description L2 LVX control packets
class-map match-any system-cpp-police-forus
description Forus Address resolution and Forus traffic
class-map match-any system-cpp-police-multicast-end-station
description MCAST END STATION
class-map match-any system-cpp-police-multicast
description Transit Traffic and MCAST Data
class-map match-any system-cpp-police-l2-control
description L2 control
class-map match-any system-cpp-police-dot1x-auth
description DOT1X Auth
class-map match-any system-cpp-police-data
description ICMP redirect, ICMP_GEN and BROADCAST
class-map match-any system-cpp-police-stackwise-virt-control
description Stackwise Virtual
class-map match-any non-client-nrt-class
class-map match-any system-cpp-police-routing-control
description Routing control
class-map match-any system-cpp-police-protocol-snooping
description Protocol snooping
class-map match-any system-cpp-police-system-critical
description System Critical and Gold
!
policy-map system-cpp-policy
!
interface Loopback0
ip address 198.51.100.1 255.255.255.128
ipv6 address FE80::198:2 link-local
ipv6 address 2001:DB8:198:51:100::1/80
!
interface GigabitEthernet0/0
vrf forwarding Mgmt-vrf
no ip address
speed 1000
negotiation auto
!
interface GigabitEthernet1/0/1
shutdown
!
interface GigabitEthernet1/0/2
shutdown
!
interface GigabitEthernet1/0/3
shutdown
!
```

```
interface GigabitEthernet1/0/4
shutdown
!
interface GigabitEthernet1/0/5
shutdown
!
interface GigabitEthernet1/0/6
shutdown
!
interface GigabitEthernet1/0/7
shutdown
!
interface GigabitEthernet1/0/8
shutdown
!
interface GigabitEthernet1/0/9
shutdown
!
interface GigabitEthernet1/0/10
shutdown
!
interface GigabitEthernet1/0/11
no switchport
ip address 10.1.32.2 255.255.255.0
ipv6 address FE80::32:2 link-local
ipv6 address 2001:DB8:ACAD:32::2/64
!
interface GigabitEthernet1/0/12
shutdown
!
interface GigabitEthernet1/0/13
shutdown
!
interface GigabitEthernet1/0/14
shutdown
!
interface GigabitEthernet1/0/15
shutdown
!
interface GigabitEthernet1/0/16
shutdown
!
interface GigabitEthernet1/0/17
shutdown
!
interface GigabitEthernet1/0/18
shutdown
!
interface GigabitEthernet1/0/19
shutdown
```

Lab - Configure Route Redistribution Between EIGRP and OSPF

```
!  
interface GigabitEthernet1/0/20  
shutdown  
!  
interface GigabitEthernet1/0/21  
shutdown  
!  
interface GigabitEthernet1/0/22  
shutdown  
!  
interface GigabitEthernet1/0/23  
shutdown  
!  
interface GigabitEthernet1/0/24  
shutdown  
!  
interface GigabitEthernet1/1/1  
!  
interface GigabitEthernet1/1/2  
!  
interface GigabitEthernet1/1/3  
!  
interface GigabitEthernet1/1/4  
!  
interface Vlan1  
no ip address  
!  
router eigrp CISCO  
!  
address-family ipv4 unicast autonomous-system 64512  
!  
af-interface default  
shutdown  
exit-af-interface  
!  
af-interface Loopback0  
no shutdown  
passive-interface  
exit-af-interface  
!  
af-interface GigabitEthernet1/0/11  
no shutdown  
exit-af-interface  
!  
topology base  
exit-af-topology  
network 10.1.32.0 0.0.0.255  
network 198.51.100.0 0.0.0.127  
eigrp router-id 22.22.22.22  
exit-address-family
```

Lab - Configure Route Redistribution Between EIGRP and OSPF

```
!  
address-family ipv6 unicast autonomous-system 64512  
!  
af-interface default  
shutdown  
exit-af-interface  
!  
af-interface Loopback0  
no shutdown  
passive-interface  
exit-af-interface  
!  
af-interface GigabitEthernet1/0/11  
no shutdown  
exit-af-interface  
!  
topology base  
exit-af-topology  
eigrp router-id 22.22.22.22  
exit-address-family  
!  
ip forward-protocol nd  
ip http server  
ip http secure-server  
!  
control-plane  
service-policy input system-cpp-policy  
!  
banner motd ^C D2, Configure Route Redistribution Between EIGRP and OSPF ^C  
!  
line con 0  
exec-timeout 0 0  
logging synchronous  
stopbits 1  
line aux 0  
stopbits 1  
line vty 0 4  
login  
line vty 5 15  
login  
!  
end
```