

MAJOR MIDI

User Manual

PAGES

[Home](#)

[User Manual](#)

[Dev Resources](#)

[Order](#)

[Transfer MIDI](#)

[Web Remote](#)

ON THIS PAGE

[Quick Start](#)

[SD Card Layout](#)

[Boot And Loading](#)

[Front Panel](#)

[Performance View](#)

[Banks And Knob Pages](#)

[BPM Editing](#)

[Channel Focus](#)

[Mute Page](#)

[Extra Views](#)

[Loop Edit](#)

[Menu Basics](#)

Load MIDI And Load SF2

General

FX

Song

SF2

MIDI

CV/Gate

Sync

Saving And Recall

Firmware Updates

Troubleshooting

Changelog

User Manual

Current operating guide for the Major MIDI firmware.

Quick Start

1. Copy one or more `.mid` files into `0:/midi` .
2. Copy one or more `.sf2` files into `0:/soundfonts` .
3. Insert the SD card and power the module.
4. Open the menu with a long encoder press.
5. Load a MIDI file from `Load MIDI` .
6. Load a SoundFont from `Load SF2` .
7. Return to the performance screen.
8. Press `Play` .

If the sync switch is set to external, playback will wait for external clock instead of free-running.

Prefer to read offline? Download this manual as a PDF: [user_manual.pdf](#).

SD Card Layout

Major MIDI scans these folders recursively:

```
0:/midi
0:/soundfonts
```

Example:

```
0:/midi/set1/track01.mid
0:/midi/loops/arp.mid
0:/soundfonts/general/microgm.sf2
0:/soundfonts/drums/clubkit.sf2
```

Hidden files and AppleDouble files are ignored.

There's no limit on how many `.mid` or `.sf2` files the card can hold in total – folders are browsed live, not pre-scanned into memory. The only cap is per folder: browsing a single folder in `Load MIDI` or `Load SF2` shows up to 128 entries for a MIDI folder and 32 entries for a SoundFont folder – if one folder holds more files than that, split them across subfolders so everything is reachable.

Boot And Loading


On boot, Major MIDI:

STEP	BEHAVIOR
SD scan	Scans <code>0:/midi</code> and <code>0:/soundfonts</code>
MIDI restore	Reloads the last saved MIDI selection when available

STEP	BEHAVIOR
SF2 selection	Starts from the first SF2, then may switch to the song's saved SF2
Song config	Loads <midi-file>.cfg if present
UI prefs	Loads general UI settings from 0:/major_midi_boot.cfg

If both a MIDI file and an SF2 are available, the unit loads them automatically at startup.

Front Panel

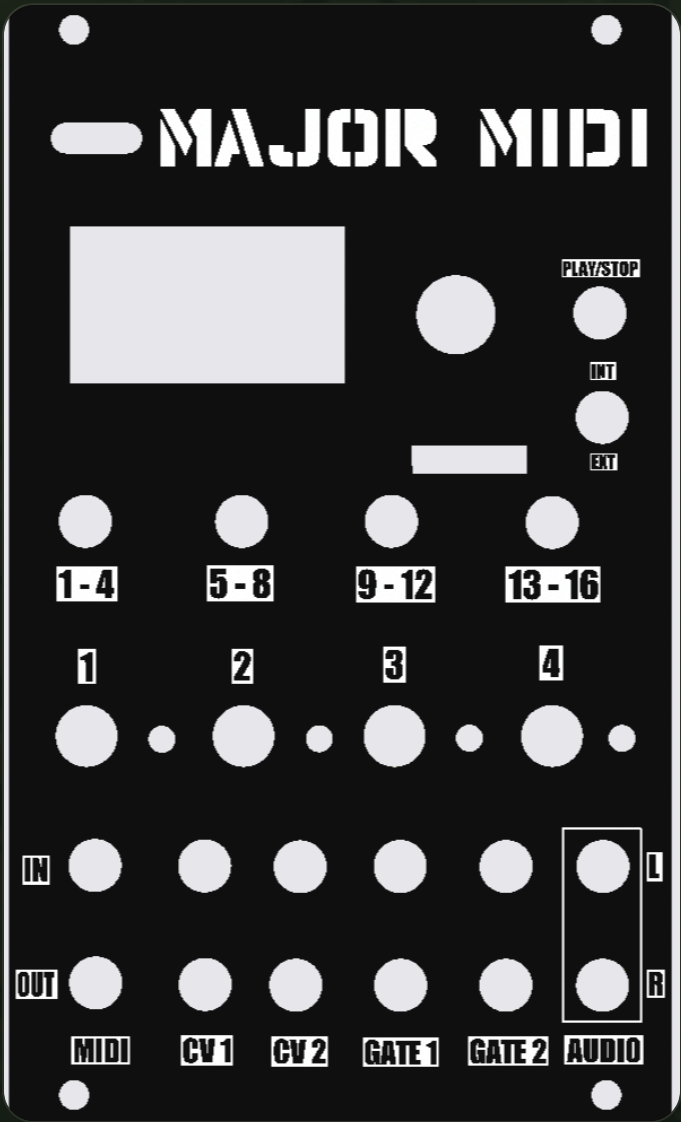

Front panel: display, transport and bank buttons, four performance knobs, and the CV, gate, and MIDI patch points along the bottom edge.

CONTROL	ROLE
B1 . . B4	Bank buttons and view combos
K1 . . K4	Per-channel controls for the visible bank
Play	Transport and back/cancel in menus
Encoder turn	Page selection, menu navigation, loop edits, BPM edit
Encoder press	Shift, confirm, enter/exit edit modes
OLED	Current mode, transport, file names, and parameter values

B1 . . B4 each have an LED that flashes briefly whenever incoming MIDI activity hits a channel in that button's bank, independent of which bank is currently selected on screen.

The sync source is a hardware switch. Internal sync free-runs from the current BPM. External sync follows incoming MIDI clock or configured gate sync.

Performance View

Performance mode is the default screen.

The top line shows:

FIELD	MEANING
STP or PLY	Stopped or playing
Active page name	The current knob page, spelled out (Volume , Pan , Reverb , Chorus , Program , MUTE PAGE , BPM)
BPM	Current transport BPM
Measure and beat	Current musical position
B1 . . B4	Active bank

The screen also shows the current MIDI file, the current SoundFont, and four visible channels from the selected bank. Each channel row is labeled with a single-letter code for the value it's showing (**V** , **P** , **R** , **C** , **G** , **M**) – those letters only appear in the per-channel grid, not on the top status line.

Banks And Knob Pages

The 16 channels are shown in four banks:

BANK	CHANNELS
B1	1-4
B2	5-8
B3	9-12
B4	13-16

Press **B1** . . **B4** to select a bank.

Turn the encoder in performance mode to cycle knob pages:

PAGE	ROW LETTER	FUNCTION
Volume	V	Volume
Pan	P	Pan
Reverb	R	Reverb send
Chorus	C	Chorus send
Program	G	Program override
Mute	M	Mute
BPM	BPM	Tempo edit page

K1 . . **K4** always control the four visible channels for the active page.

With **Knobs** set to **Pickup** , a knob must cross the stored value before it takes control. With **Knobs** set to **Instant** , the value jumps immediately.

BPM Editing

The encoder does not always change tempo directly.

To edit tempo:

1. Turn the encoder until the active page is **BPM** .
2. Tap the encoder to unlock BPM editing.
3. Turn the encoder to set BPM from **20** to **300** .
4. Tap the encoder again to lock BPM.

BPM is hard-clamped to the 20-300 range everywhere it can be set (performance page, Song BPM override, and the web remote). If a song BPM override is saved for the current MIDI file, that override is applied when the song loads.

When you change tempo during playback, Major MIDI glides to the new BPM instead of snapping to it — the transport ramps at up to 240 BPM per second so a large jump takes a moment to settle, keeping timing musical rather than jarring. This smoothing applies to tempo changes you make by hand (encoder or web remote); locking to external MIDI/gate clock tracks the incoming clock directly, and a tempo change made while looping re-seeks the loop instead of ramping.

Channel Focus

Long-press one of **B1** . **B4** in performance mode to focus that visible channel. This is disabled while the **Mute** knob page is active — on that page, a plain press of **B1** . **B4** toggles mute directly instead (see [Mute Page](#) below).

Channel focus shows:

ITEM	MEANING
Channel and bank	Which channel is selected

ITEM	MEANING
Program	Current program or override, marked <code>OVR</code> for a manual override or <code>MID</code> when following the file
Program name	Current GM/SF2 program label when available
Volume and pan	Current mix values. Volume is a scaler on top of the MIDI file's own CC7 (channel volume) automation, not a replacement for it – at <code>127</code> the file's CC7 passes through unchanged, and lower settings quiet that channel proportionally while preserving the file's original mix and any volume automation baked into the track.
Reverb and chorus	Current send values
Mute state	Per-channel mute status

Turn the encoder to move between fields, cycling `Mute` → `Volume` → `Pan` → `Reverb` → `Chorus` → `Program` . Tap the encoder to enter edit mode for the selected field, turn to adjust it, then tap again to lock it back. Long-press the encoder to leave channel focus entirely and return to the normal bank view – a plain tap only toggles edit mode, it does not exit.

Mute Page

On the `M` knob page:

CONTROL	RESULT
<code>K1..K4</code>	Set mute state for the visible channels
<code>B1..B4</code>	Toggle mute for the visible channels directly

To switch banks while on the mute page, hold the encoder and press a bank button.

Extra Views

Press the button combos below to open alternate views:

COMBO	VIEW
B1 + B2	MIDI monitor
B1 + B3	Transport/song info
B1 + B4	Loop edit

You can jump directly between MIDI monitor, transport view, and loop edit using these same combos without returning to performance mode first. The combos are only ignored while a menu is open.

MIDI Monitor

The MIDI monitor shows the most recent note, pitch bend, and CC activity for each channel, five channels at a time. Scroll to reach the rest.

Controls:

CONTROL	RESULT
Encoder turn	Scroll channel list
Play	Clear monitor data
Encoder tap or long press	Exit

Transport View

The transport view shows the current MIDI file, measure and beat, loop range, current tick, active voice count, and time signature.

Press **Play** , tap the encoder, or long-press the encoder to exit back to performance mode.

Loop Edit

Loop edit gives direct access to the current loop range.

Editable fields:

FIELD	MEANING
Active	Enable or disable looping
St M	Start measure
St B	Start beat
St T	Start tick
Ln M	Loop length in measures
Ln B	Additional beats
Ln T	Absolute length in ticks (up to 2,000,000,000)

Controls:

CONTROL	RESULT
Encoder turn	Move between fields
Encoder press	Toggle edit mode for the selected field
Play	Exit loop edit
Encoder long press	Exit loop edit

Menu Basics

Open or close the main menu with either:

ACTION	RESULT
Long encoder press	Toggle menu

ACTION	RESULT
Hold encoder and press <code>Play</code>	Toggle menu

Inside menus:

CONTROL	RESULT
Encoder turn	Move cursor
Encoder press	Enter page, confirm selection, or toggle page edit mode
<code>Play</code>	Back out one level or leave the menu

Main menu pages:

PAGE	PURPOSE
<code>Load MIDI</code>	Browse and load <code>.mid</code> files
<code>Load SF2</code>	Browse and load <code>.sf2</code> files
<code>General</code>	UI preferences
<code>FX</code>	Global synth FX tuning
<code>Song</code>	Song-level loop, tempo, and quick-save settings
<code>SF2</code>	Synth and per-channel settings
<code>MIDI</code>	USB/UART output routing
<code>CV/Gate</code>	CV and gate assignment
<code>Save All</code>	Write config files safely

`Save All` opens a confirmation page (`Confirm Save` / `Cancel`) rather than saving immediately, and it is refused with a `Stop Playback First` message if the transport is playing or any channel gate is currently active.

Load MIDI And Load SF2

The file browsers support subdirectories.

Behavior:

ITEM	BEHAVIOR
Directory	Enter it
[..]	Go up one level
File	Load it

Loading a MIDI file also reloads the song-scoped config file when `<song>.cfg` exists next to that MIDI file.

General

General settings:

ITEM	MEANING
Saver	Screen saver timeout: Off , 10s , 30s , 1m , 2m , 5m , 10m , 30m , or 1h (default 1h)
Knobs	Pickup or Instant
Enc	Encoder direction
OLED X	Horizontal OLED column offset, 0 - 8
CV1 Sc1	CV out 1 pitch-scale calibration, 90.0 - 110.0 % (default 102.8 %)
CV2 Sc1	CV out 2 pitch-scale calibration, 90.0 - 110.0 % (default 102.8 %)
Master Vol	Master volume, 0 - 200 % in 5 % steps (default 100 %)

CV1 Sc1 and **CV2 Sc1** trim the 1V/octave scaling of each pitch CV output in **0.1 %** steps. This calibration is global and shared across every song — it lives in the boot config, not the per-song **.cfg** — so you set it once for your rack. Raise the scale if each octave measures slightly flat, and lower it if each octave measures sharp.

Master Vol scales the final post-synthesis audio output. It's a device-global setting (stored in the boot config, not per-song) and is separate from the per-channel **Volume** scaler described in [Channel Focus](#) and the **SF2** menu, which scales each channel's own CC7 automation rather than the overall output. At **100 %** the output is unchanged; raising it above **100 %** boosts overall level (up to **200 %**), and the downstream limiter still protects against clipping if you push it that high. If a CV input is patched to **MasterVol** (see [CV/Gate](#)), the CV signal modulates within the range set by **Master Vol** rather than driving gain on its own.

The screen saver only engages in performance mode, and only after the timeout has passed with no button/encoder/knob activity and no overlay message showing.

FX

FX settings are global, not per-channel.

ITEM	MEANING	RANGE
Rev Time	Reverb time	0.0 - 1.0
Rev LPF	Reverb low-pass filter	200 Hz - 18000 Hz
Rev HPF	Reverb high-pass filter	20 Hz - 1000 Hz
Ch Depth	Chorus depth	0.0 - 1.0
Ch Speed	Chorus speed	0.05 Hz - 5.0 Hz
Reverb	Reverb on/off	On , Off (default On)
Chorus	Chorus on/off	On , Off (default On)

Per-channel reverb and chorus amounts stay on the performance pages and in the **SF2** menu.

Turning **Reverb** or **Chorus** off skips that effect's processing entirely to save CPU — only the dry signal passes through. Turning it back on resumes processing with whatever **Rev**

Time / Rev LPF / Rev HPF (reverb) or Ch Depth / Ch Speed (chorus) values were last set. Like the rest of the FX page, Reverb and Chorus are runtime-only settings – they are not saved to the per-song .cfg or the boot config, and both reset to On on every boot or song load.

Song

Song settings:

ITEM	MEANING
BPM Ovr	Saved BPM override
Loop	Loop enable
St M , St B , St T	Loop start
Ln M , Ln B , Ln T	Loop length
Save Song CFG	Quick-save the current song's settings without opening the Save All confirmation

Save Song CFG writes the same per-song .cfg file (plus the boot-state file) that Save All writes, but does it immediately with no confirmation step and without requiring playback to be stopped first. Use Save All instead when you want the safety of a confirmation prompt and a guaranteed-stopped transport during the write.

SF2

SF2 settings:

ITEM	MEANING
Voices	Max synth voices, 0 - 32 (default 16); 0 silences the synth entirely

ITEM	MEANING
Channel	Channel being edited
Mute	Mute for that channel
Volume	Channel volume. Scales the channel's own MIDI CC7 automation from the file (127 = pass the file's CC7 through unchanged; lower values quiet it proportionally) rather than overriding it, so a song's original track balance and any volume automation in the file are preserved. A live CC7 message from an external MIDI controller on that channel still takes precedence in real time.
Pan	Channel pan
RevSend	Channel reverb send
ChoSend	Channel chorus send
Program	Program override or file-follow mode
Trans	Global transpose, -24 to +24 semitones

Program behavior:

VALUE	RESULT
Program File	Follow program changes from the MIDI file
Program 000..127	Force a manual program override

Trans shifts every channel except the drum channel (MIDI channel 10) – drum kits stay at their original pitch under transpose.

Higher voice counts increase CPU load. If playback becomes unstable, reduce Voices .

MIDI

The MIDI page controls USB and UART output routing.

Available output modes:

MODE	MEANING
Off	No channel output
Notes	Forward notes only
Nt+CC	Forward notes and CCs
N+C+P	Forward notes, CCs, and programs
Matrix	Per-channel routing matrix

Matrix controls let you choose:

ITEM	MEANING
Mtx Port	USB or UART
Mtx Src	Source channel
Mtx Dst	Destination channel
Mtx Nt	Forward notes
Mtx CC	Forward CCs
Mtx Prg	Forward program changes

There are also dedicated toggles for:

ITEM	MEANING
USB Trn / UART Trn	Forward transport messages
USB Clk / UART Clk	Forward clock
USB>UART	Pass USB input to UART output
UART>USB	Pass UART input to USB output

CV/Gate

Major MIDI exposes exactly two CV inputs, two gate inputs, two gate outputs, and two CV outputs, fully configurable per song.

Input CV modes:

MODE	MEANING
Off	Disabled
MasterVol	Master volume control. Modulates within the range set by <code>Master Vol</code> in the <code>General</code> menu (see General) rather than setting gain on its own — the UI setting is the base/ceiling, and the CV value scales within it.
BPM	Tempo control, <code>20 - 300</code> BPM linear across the CV input's <code>0V - 5V</code> range
Ch Pitch	Channel pitch control
Ch CC	Channel CC control
NotePitch	Note pitch control

Gate input modes:

MODE	MEANING
Off	Disabled
Sync	External gate sync input — pulses directly step playback (one pulse advances the loaded MIDI file by one 16th note) and also drive the displayed/effective BPM
NoteTrig	Trigger notes on a channel

`NoteTrig` reads its paired CV input as a pitch across a 5-octave span (from `C1` to `C6`) and fires the note at a fixed velocity.

Gate output modes:

MODE	MEANING
Off	Disabled
Sync	Clock output
Reset	Reset pulse output
Ch Gate	Gate output from a channel

Gate outputs pulse for about 10 ms.

CV output modes:

MODE	MEANING
Off	Disabled
Pitch	Output channel pitch
CC	Output a channel CC value

Each CV/gate page also exposes the related channel, CC number, sync resolution, trigger style, or note priority when that mode needs it.

Pitch CV out runs 1V/octave from C1 (0V) up to 5V of headroom (about 10 octaves). The 1V/oct scaling is trimmed with CV1 Sc1 / CV2 Sc1 in the General menu, not here – that calibration is global (shared across all songs), so it lives with the general settings rather than the per-song CV/Gate config. See [General](#) for the calibration procedure.

Sync

Major MIDI has two sync behaviors:

SYNC SOURCE	BEHAVIOR
Internal	Plays at the current BPM
External	Waits for incoming clock before advancing

External sync can follow:

SOURCE	NOTES
MIDI clock	Via incoming MIDI transport clock
Gate sync	Via configured gate input sync pulses

If a gate input is configured in **Sync** mode, its pulses directly drive playback — each pulse advances the loaded MIDI file by one 16th note — and also set the displayed/effective BPM and lock status. MIDI clock only drives playback when no gate input is configured for **Sync**.

If both a MIDI clock source and a gate sync input are active at once, the configured gate sync input takes priority: its pulses step playback directly and MIDI clock is ignored for advancing the file (though it may still be present on the bus).

If external sync is selected and no valid clock arrives, **Play** will arm transport but the song will not move.

Saving And Recall

There are two ways to write settings to disk, both scoped to the currently loaded song and both writing the per-song `.cfg` plus the boot-state file:

ACTION	BEHAVIOR
Song > Save Song CFG	Immediate save, no confirmation, works even while playing
Save All (main menu)	Confirmation prompt, forces the transport to stop first, refuses to run if anything is still playing or gating

Save All stores:

SAVED STATE
Selected SF2 for the current song
Channel mix, mute, and program override state

SAVED STATE

Song loop data

MIDI routing

CV/gate assignments

General UI settings and last boot MIDI selection

For reliability, prefer `Save All` when you have time for the confirmation step; use `Save Song CFG` for a fast save between takes.

Firmware Updates

Your module ships with firmware already installed, so there is nothing to flash to get started. This section is only for moving to a newer release.

Updating needs no toolchain — just a USB cable and a browser:

1. Download `MajorMIDI.bin` from the [latest release](#).
2. Connect the module to your computer over USB.
3. Tap the `RESET` button on the Daisy board. This opens a 2-second window where the module accepts a firmware update.
4. Within that window, open the [Electro-Smith Web Programmer](#) in Chrome or Edge, connect to the module, select `MajorMIDI.bin`, and flash it to the `QSPI` target.
5. Power-cycle the module when it finishes.

If the programmer does not see the module, the 2-second window has almost certainly closed — tap `RESET` again and reconnect straight away.

Updating firmware does not erase your SD card, so your `.mid` files, SoundFonts, and saved `.cfg` song settings all carry over. If you prefer the command line, or you are building your own module from a bare Daisy Patch SM, the repository README covers `dfu-util` and first-time bootloader setup.

Troubleshooting

PROBLEM	CHECK
No playback when pressing Play	Sync switch may be set to external with no incoming clock
No files in browser	Confirm files are under <code>0:/midi</code> or <code>0:/soundfonts</code> , and that the folder doesn't exceed the browser's visible-entry limit
Wrong instrument loads with a song	Check the song's saved SF2 and per-channel program overrides
Knobs do not respond immediately	Knobs may be set to Pickup
No sound at all	Voices may be set to <code>0</code> , which silences the synth
Audio overload or glitches	Lower Voices , reduce dense arrangements, or use a lighter SF2

Changelog

- Added **Reverb** and **Chorus** on/off toggles to the **FX** menu, letting you disable either effect's processing entirely to save CPU. Both default to **On** and are runtime-only (not saved to the per-song `.cfg` or boot config).
- Performance mode no longer shows a pop-up message in the bottom row of the display when switching knob pages, banks, muting channels, or navigating instrument focus — the display stays clean while you play.
- Instrument focus view no longer shows the small channel-position indicator (e.g. ">01 02 03 04") in the bottom-right corner.
- Reverb and chorus no longer cut out at high voice counts — the FX now always run regardless of polyphony.
- Gate Sync In now drives MIDI file playback directly (one pulse = one 16th note) and takes priority over MIDI clock when configured, instead of only affecting the BPM estimate.
- Fixed: pressing **Play** under external sync (MIDI clock or gate) could resume mid-song instead of from the start, because pulses received while stopped kept queuing up and were dumped into the playback position the instant playback started. **Play** now always rewinds to the beginning (or the active loop's start point) and discards any backlog from while it was stopped.

- Fixed: long-pressing a bank button now correctly opens that channel's instrument edit instead of jumping to the wrong channel.

Generated from `USER.md`.