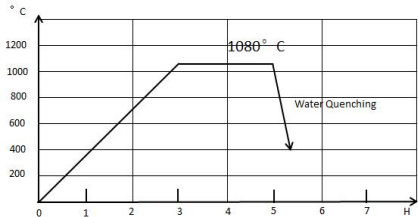


Material Test Certificate EN10204-2004 3.1

Cert No. GM20250218-09

Serial No			Date: 2025/2/18		Order No : 81807-5		Customers: GEMÜ Valves(China) Co., Ltd.				Name/Size : Diaphragm valve body				Drawing No: 5D002-C3-020-17-860											
Material No: 1.4435			Material Standard : AD 2000-regulation W5 and EN10213				Foundry Code: HR				Foundry Inspector Code:				Qty.: 62 pcs											
Pos.	ITEM No.	Heat No.	Chemical composition													Mechanical										
			C	Si	Mn	P	S	Cr	Mo	Ni	Ti	N	Delta Ferrite	Al	Cu	Coupon type	Tensile strength (N/mm2) 390-640	Submit strength (N/mm2)		Extension A% min.25	Hardness HB	impact value acc. to EN ISO 148				
																		(N/mm2)				Min.50J (RT,10x10x55)				
																		Rp1.0	Rp0.2							
		Min					0.005	17.00	2.50	12.50																
		Max	0.03	1.00	2.00	0.045	0.017	18.00	3.00	14.00	0.05	0.10	1%													
1	60079642	252E9	0.023	0.60	1.63	0.033	0.007	17.28	2.60	13.49	0.02	0.09	0.17%	0.01	0.13		452	230	204	32	—	120.63	115.85	121.32	119.27	
2																										
3																										
4																										
5																										
6																										
7																										
8																										
9																										
10																										

Heat treatment	Method	Furnace type	Temp °C	Holding time/h	Cooling method	Heat treatment cycle curve :
	Solution Annealing	Electric Furnace	1080 °C	2 Hours	Water Quenching	

1. We hereby certify that the material was manufactured, sampled tested and inspected in acc to with the material specification and customers requirements and was found to meet the requirements.

2. Marking: PN16 1.4435 DN20 M12 GEMU HR Heat No..

3. PMI testing result is OK.

4. Visual and dimension tests are acceptable.

5. Testing of resistance against intergranular corrosion once a year acc. to DIN EN ISO 3651-2

Signature of Inspector Toby Zhou

Signature of QC Manager Courage Qi

VALVES (CHINA) CO., LTD

质检专用章

Quality Inspection Special Chapter

Courage Qi