


Figure 1. Motivation and problem definition

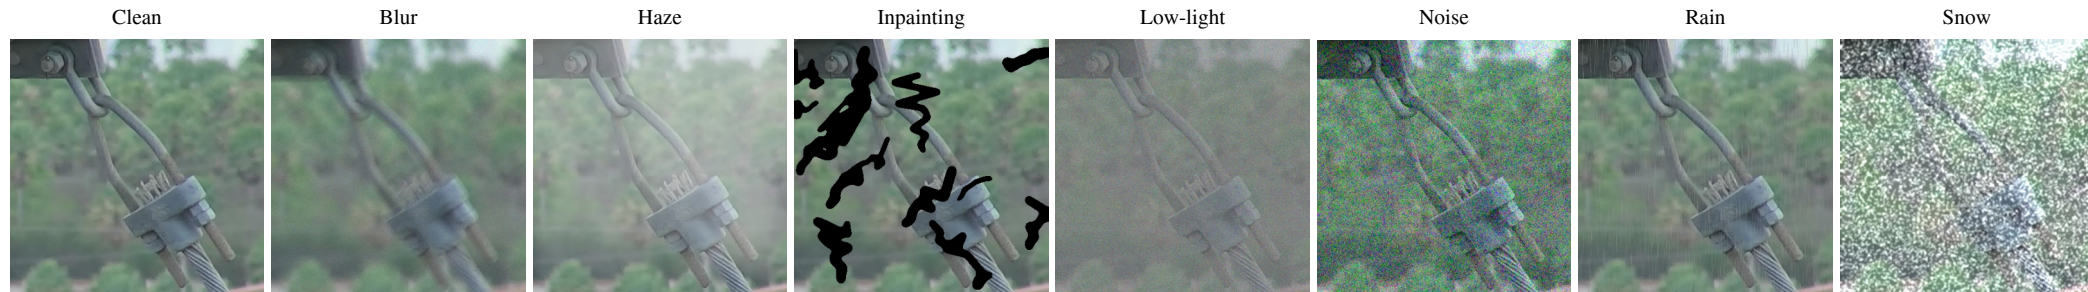

Heterogeneous degradation $\rightarrow$ pixel corruption + identity drift $\rightarrow$ restoration

Restoration Fidelity

PSNR $\uparrow$ | SSIM $\uparrow$ | LPIPS $\downarrow$

Pixel fidelity

Identity Fidelity

Top-1 $\uparrow$ | EER $\downarrow$ | Cosine $\uparrow$

Source retention

Efficiency

Params $\downarrow$ | MACs $\downarrow$ | Latency $\downarrow$

UAV deployment