

Push Cart Dolly




Tips before assembling


Please carefully check each part before assembling to ensure they are ready for proper assembly.

Parts


Make sure you have all parts as below before assembling.



x1



x2



x2






x16





x1

Hand Truck Assembly and Operation Instructions

- 1.The dolly has four caster wheels in total.
- 2.The swivel casters are positioned on the handle side.
- 3.Each caster is bolted to the underside of the platform.
- 4.Bolts are inserted from the top through the platform and caster plate.
- 5.Nuts are tightened underneath to secure the assembly.



- 1.Step on the metal bar located directly beneath the handle to release the lock.
- 2.While keeping the bar pressed down, fold the handle downward until it is fully collapsed and secured in place.

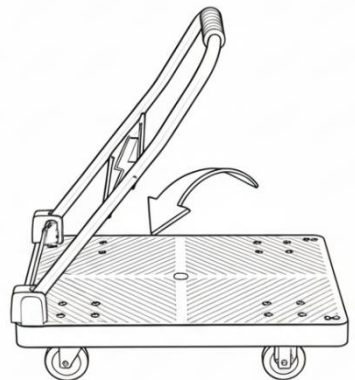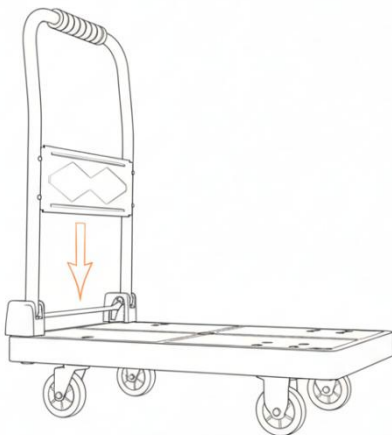



Push Cart Dolly

CUSTOMER SERVICE NUMBER

(332) 201-8325

CUSTOMER SERVICE EMAIL

support@diamondforge.com

OFFICIAL WEBSITE

<https://www.diamondforge.com>



**EXTENDED WARRANTY
QR CODE**