DSB perception: BEVFusion (detection + BEV segmentation) and FlashOCC (occupancy)

BEVFusion: camera Swin-T + LSS/DepthLSS, LiDAR SparseEncoder, ConvFuser; det head TransFusion, seg head 6-class BEV. FlashOCC: ResNet-50 + LSS view transform + 2D BEV encoder + channel-to-height occupancy head.

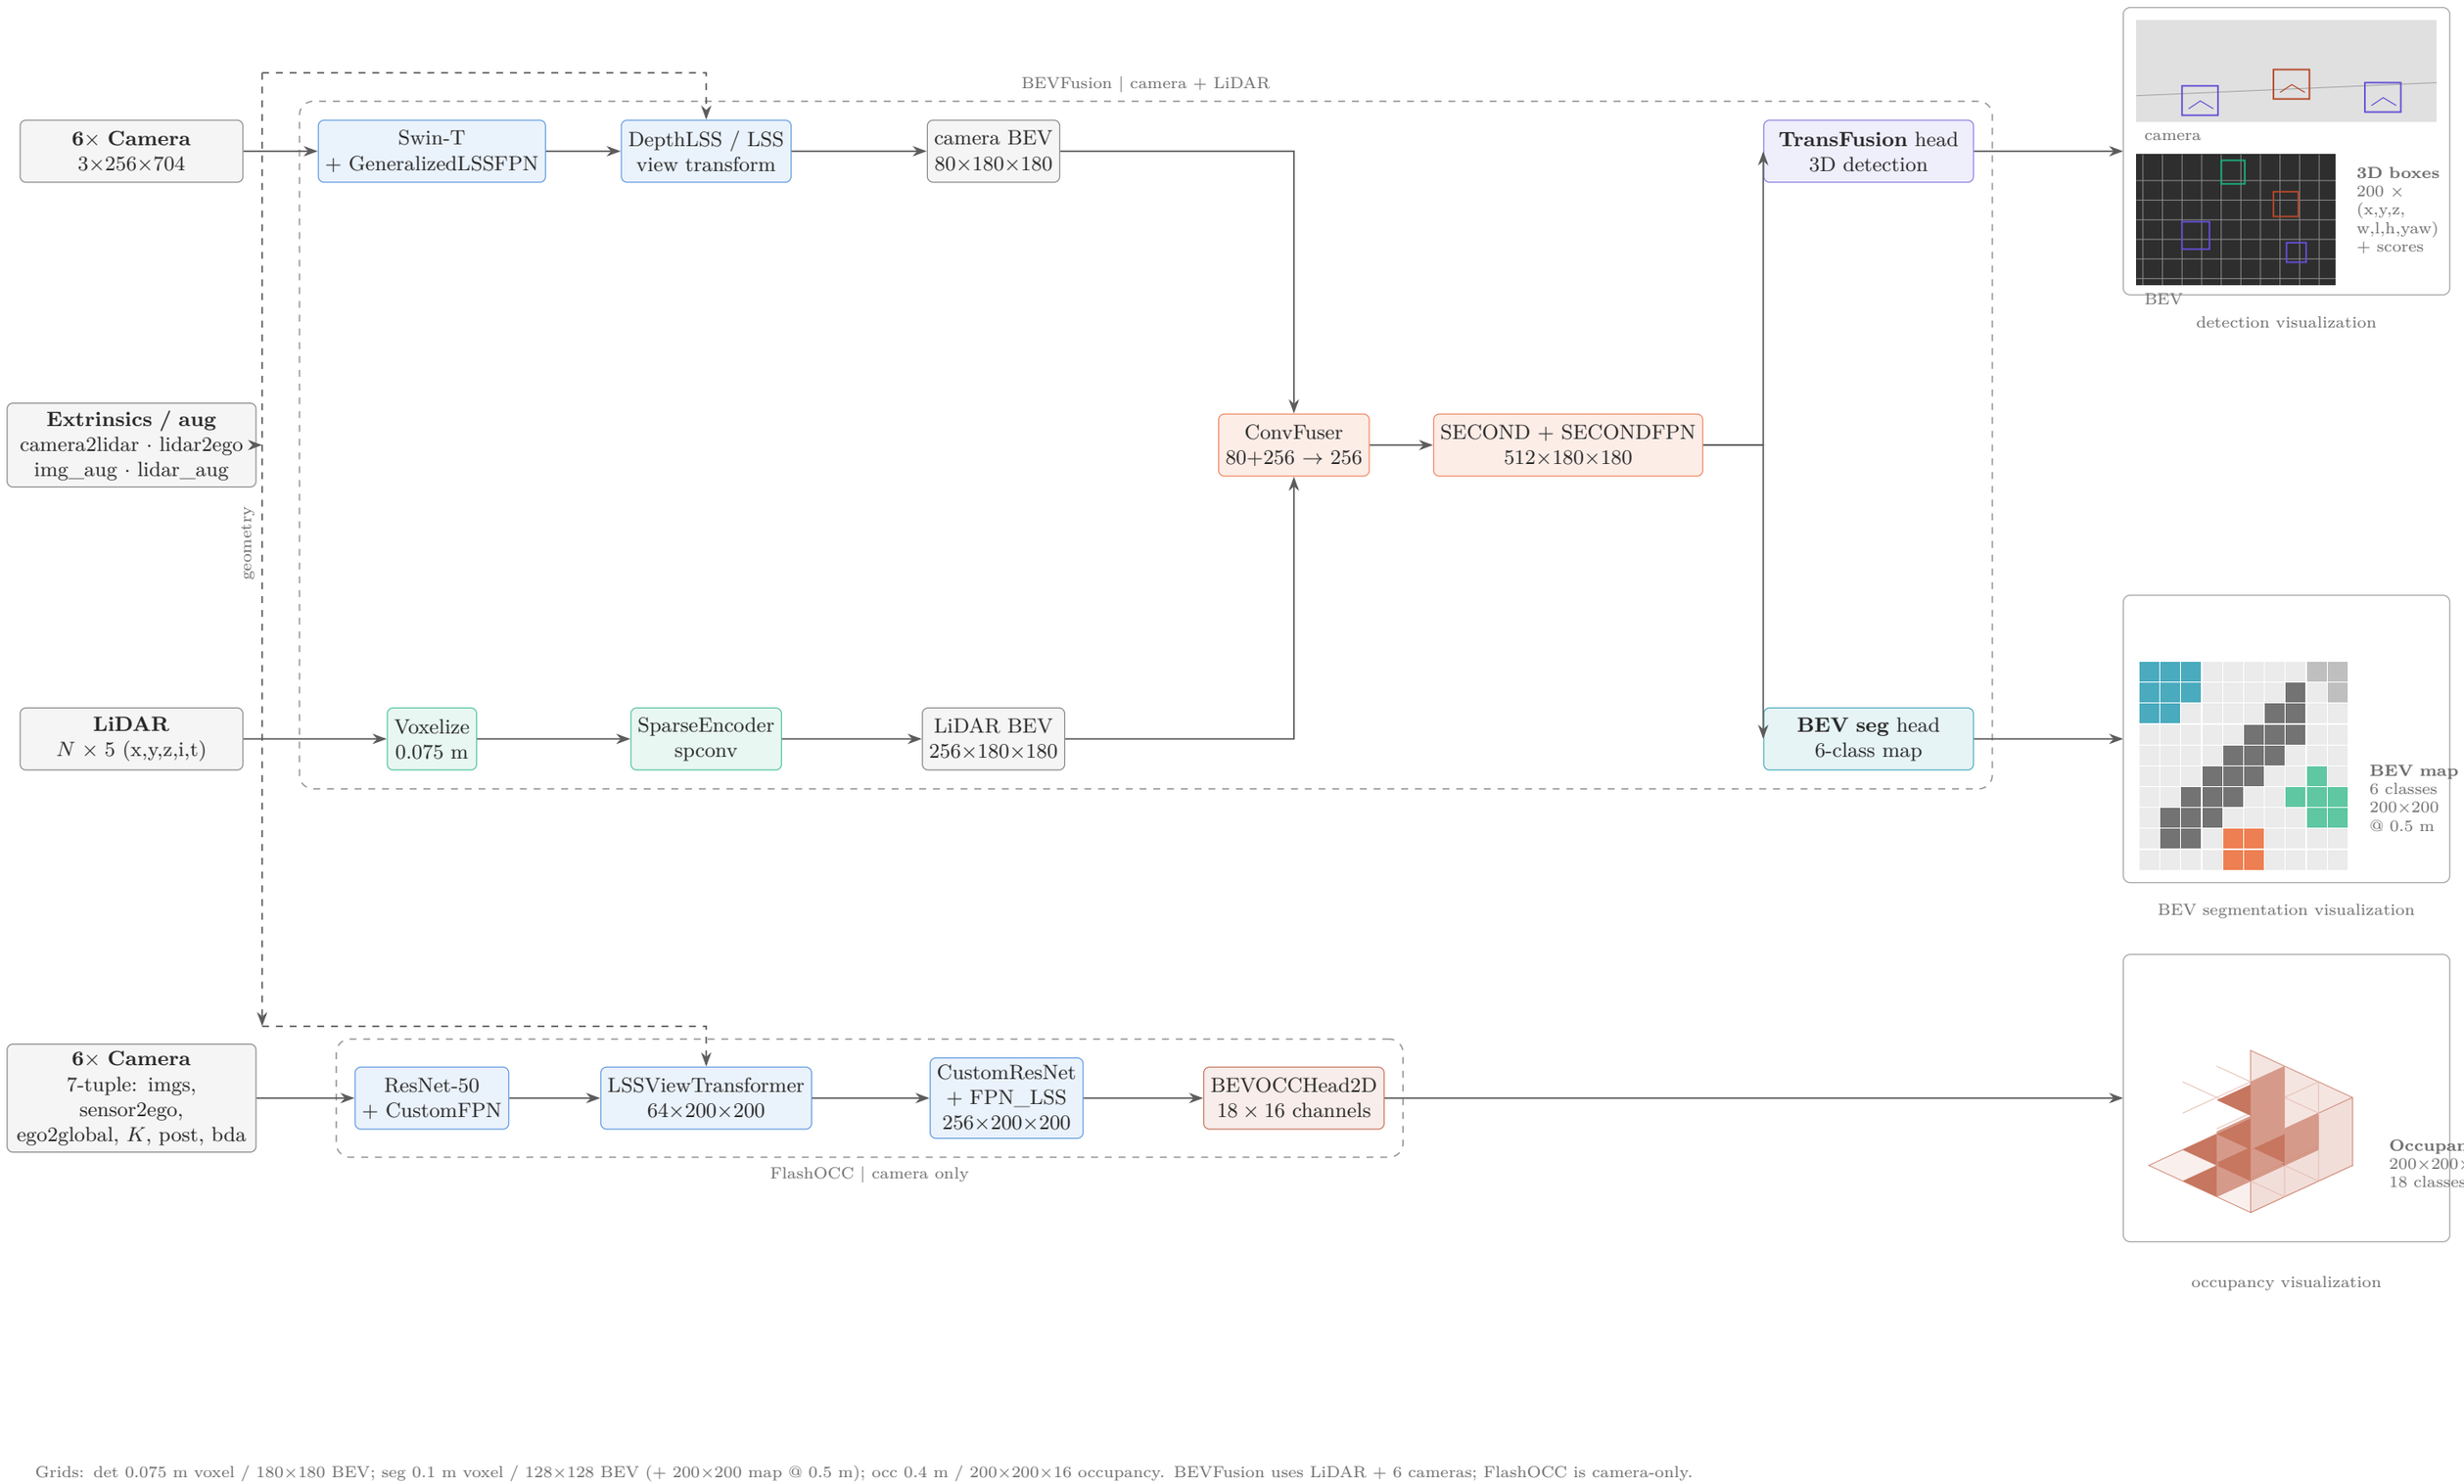

Grids: det 0.075 m voxel / 180×180 BEV; seg 0.1 m voxel / 128×128 BEV (+ 200×200 map @ 0.5 m); occ 0.4 m / 200×200×16 occupancy. BEVFusion uses LiDAR + 6 cameras; FlashOCC is camera-only.