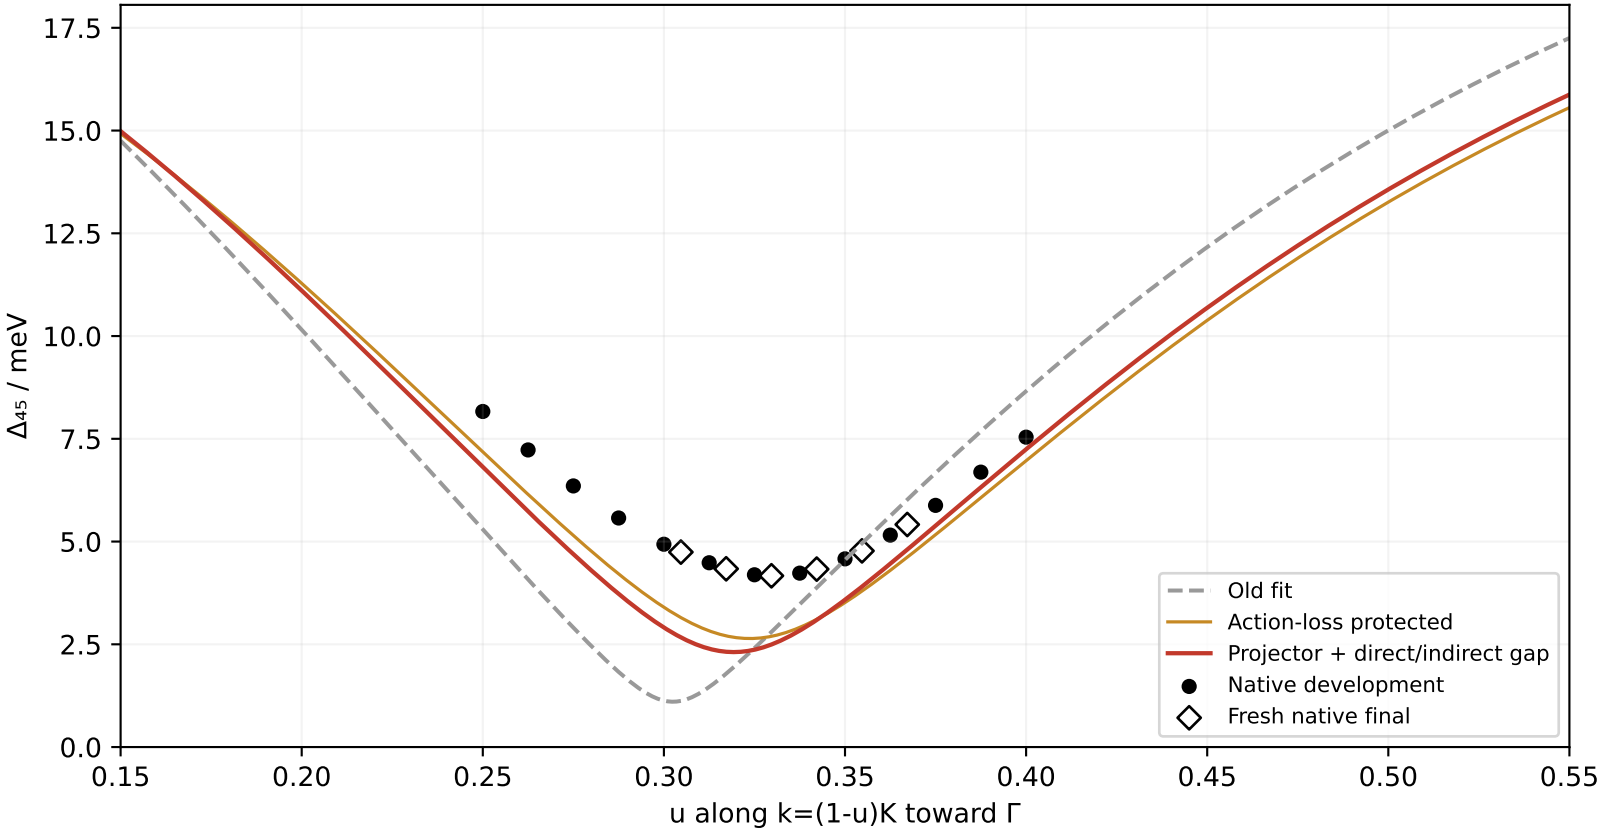
Same six parameters: direct and indirect gap refinement
Δ45 / meV
u along k=(1-u)K toward Γ
0.0
2.5
5.0
7.5
10.0
12.5
15.0
17.5
0.15
0.20
0.25
0.30
0.35
0.40
0.45
0.50
0.55
Old fit
Action-loss protected
Projector + direct/indirect gap
Native development
Fresh native final