

# 基于 FSS 的新型天线罩设计

## 摘要

**关键字：** 频率选择表面 极化不敏感 三层复合结构 宽角度不敏感

## **Abstract**

**Keywords:** Frequency Selective Surface   Polarization Insensitivity   Three-layer Composite Structure

## 目录

<b>1</b>	<b>A</b>	<b>4</b>
<b>2</b>	<b>Section A</b>	<b>4</b>
<b>3</b>	<b>Section B</b>	<b>4</b>
<b>4</b>	<b>Section C</b>	<b>4</b>
<b>5</b>	<b>Section D</b>	<b>4</b>
<b>6</b>	<b>item</b>	<b>4</b>
6.1	Table	4
6.1.1	Tables side by side	4
6.2	Picture	4
6.2.1	title	4
6.2.2	Pictures side by side	4
	参考文献	<b>5</b>

# 1 A

## 2 Section A

## 3 Section B

## 4 Section C

## 5 Section D

## 6 item

### 6.1 Table

#### 6.1.1 Tables side by side


表 6.1    Difference of Mild Steel			表 6.2    Difference of Alminium		
Loading	Difference	Difference rate	Loading	Difference	Difference rate
50N	0.01906 mm	16.5681%	50N	0.03944 mm	12.1856%
100N	0.03803 mm	16.5298%	100N	0.07887 mm	12.1839%
150N	0.05709 mm	16.5426%	150N	0.11831 mm	12.1845%
Average		16.55%	Average		12.18%

### 6.2 Picture


#### 6.2.1 title

#### 6.2.2 Pictures side by side


Images side-by-side, each with its own subheading but sharing large headings and tags

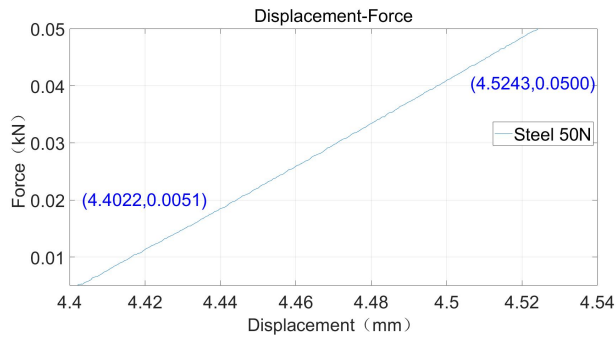


(a) 50N loading Mild Steel

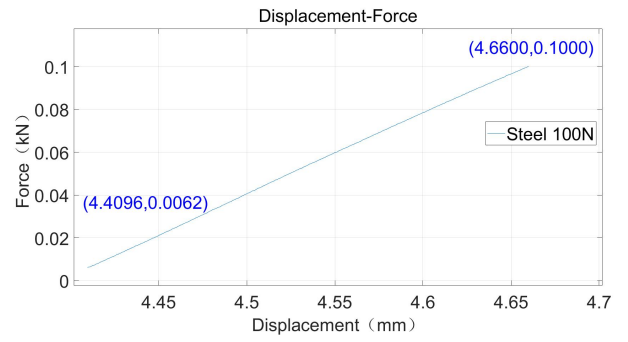


(b) 100N loading Mild Steel

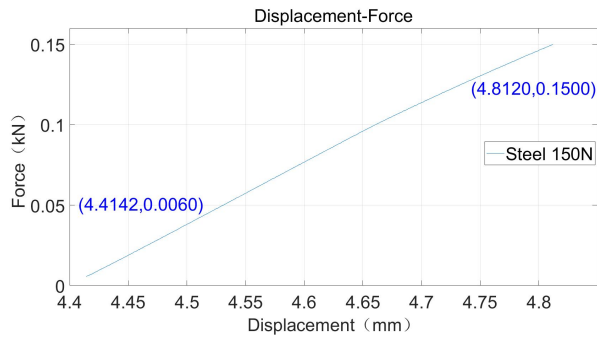


(c) 150N loading Mild Steel

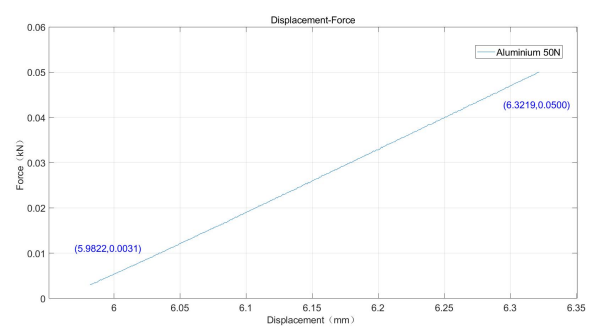

(d) 50N loading Aluminium

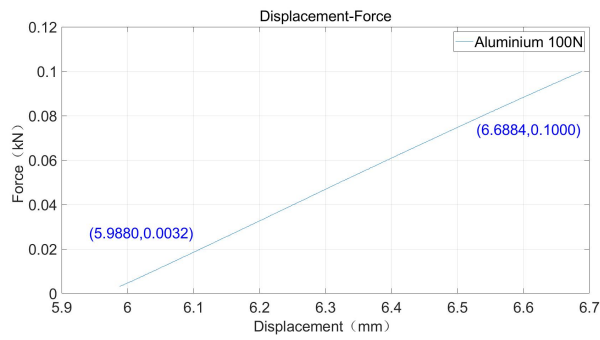

(e) 100N loading Aluminium

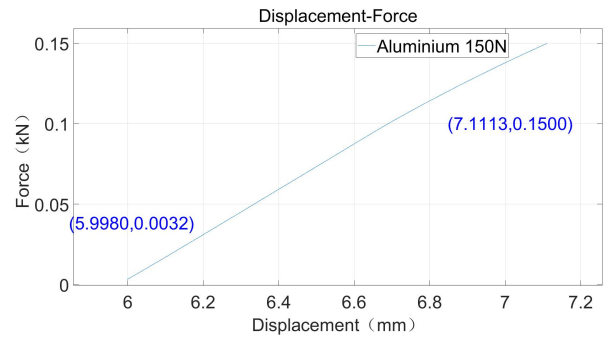

(f) 150N loading Aluminium

图 6.1 Results of experiments with Steel and Aluminium

参考文献