Stairio casing · Conditional ventilation sensitivity

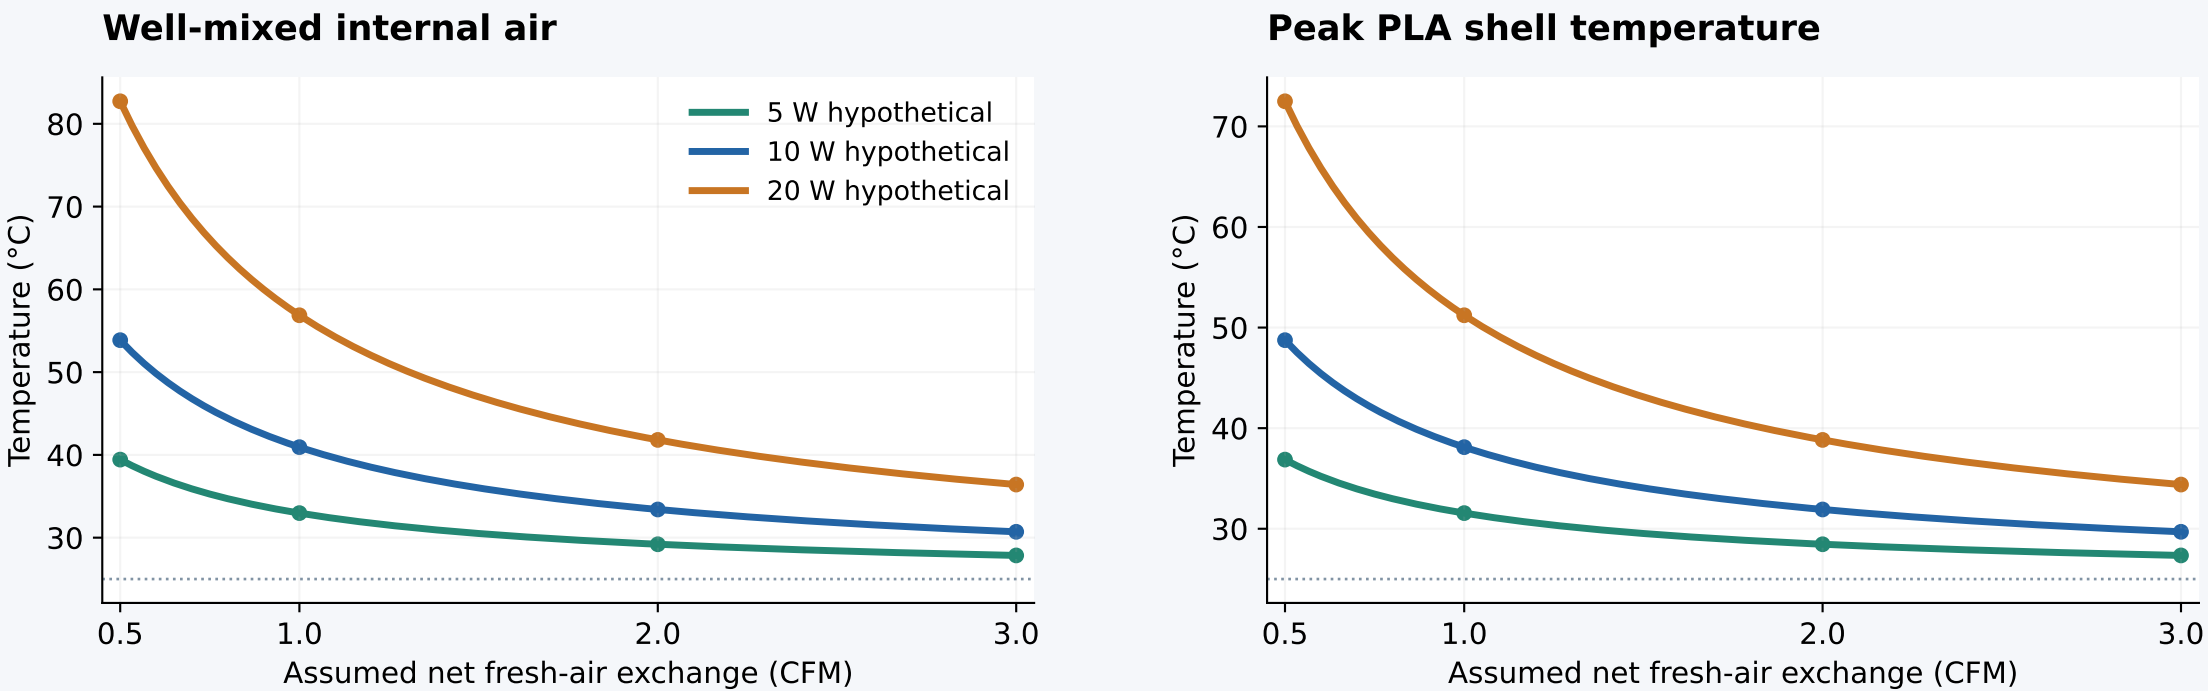

25°C room · internal h=10, external h=5 W/(m²·K) · constant PLA k=0.2 W/(m·K)
ANSYS shell FE + bulk-air energy balance; no local flow or component temperature prediction.