


AUTO ELECTRONICS

WWW.TRADE-UNIVERSAL.COM

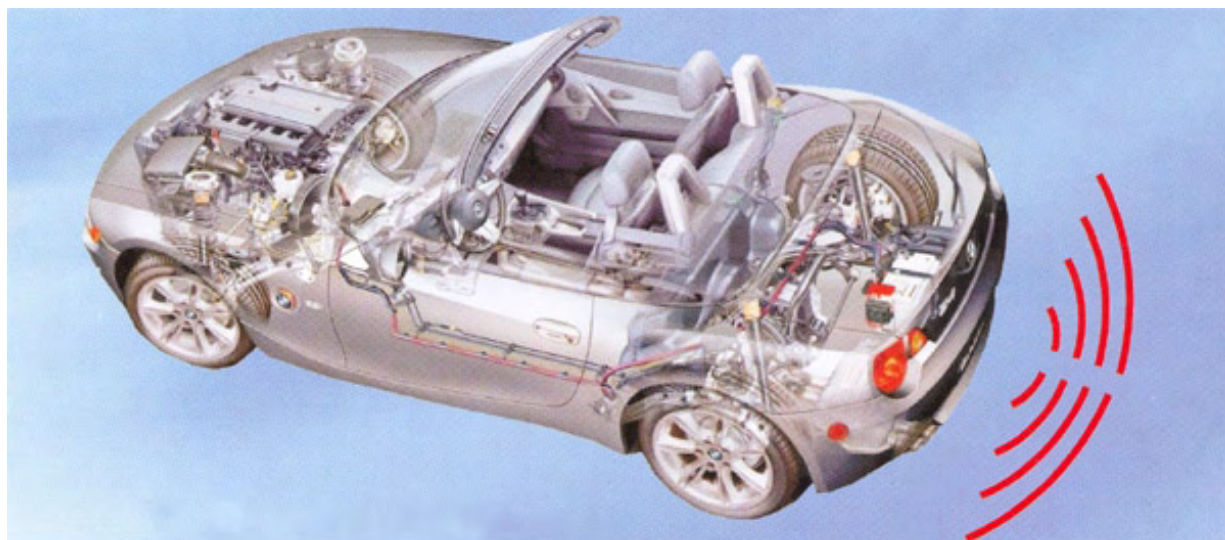

- ***Mp3 transmitter***
- ***Parking Assistant System***
- ***Wireless Parking Assistant System***
- ***Tire Pressure Monitoring System***

SICTEC Group Inc.

*Division of Trade
7050 Woodbine Avenue, Suite 201
Markham (Toronto), Canada L3R 4G8
Phone: 905-943-7571*

Mp3 Transmitter

MODEL: MPT-10 (With LCD display)

Operating range: >10m

Operating current: 45mA

Transmission range: 87.5MHz~108.0MHz(interval 0.1MHz)

Frequency response: 20~15000Hz

Stereo Separation: 40dB

Transmission Frequency Deviation: <0.01M

Frequency stability range: ± 10 PPM

Signal-to-Noise ratio: ≥ 68 dB

MPT-10



Mp3 Transmitter

MODEL: MPT-20

Frequency: 88.1MHz/88.3MHz/8.5MHz

Frequency Stability: 10ppm(-10 ~50)

Modulation Mode: 75KHz wide band

Syntonic Preference: -60dB

Transmit Distance: >5m

Distortion: 3%(F=75KHz,f=1KHz)

Signal-to-Noise ratio: 45dB

Input Voltage: 3V

MPT-20



Mp3 Transmitter

MODEL: MPT-30

Power Supply: 2xAAA 1.5V batteries

Status Indication: Power light and LED indicator

Compact Cable Management

Frequencies: 88.1/88.3/88.5/88.7KHz

Operating Range: 3m~10m (10~30 feet)


Audio Frequency Range: 50Hz~15KHz

MPT-30



AUTO ELECTRONICS


PAS-30

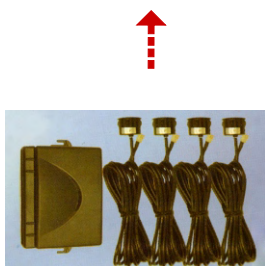

Parking Assistant System

MODEL: PAS-30

Mini seven segments
colorfull LED Display

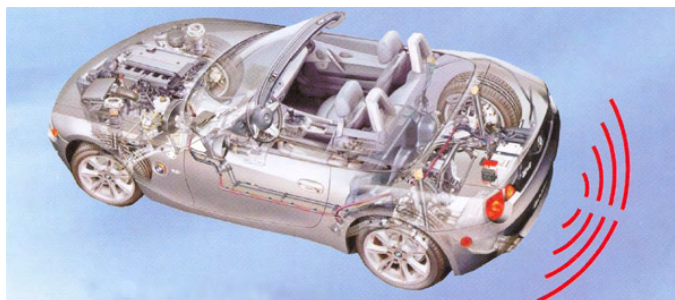

PAS-40




Wireless Parking Assistant System

MODEL: PAS-40

Reted Work Voltage: DC12V
Operating Voltage Range: DC9V~16V
Detecting Range: 0~2.5m/0.0~8.2ft
Readable distance range on the
display: 0.3~1.5m/1.0~5.0ft
Ultrasonic Frequency: 40KHz
Sensor Work Temperature: -40~85

PAS-50

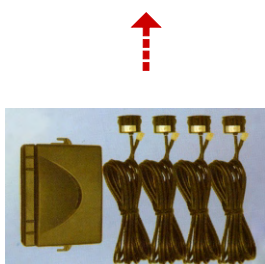

Tire Pressure Monitoring System

MODEL: PAS-50

Amphibious LCD Display integated with
rechargeable battery:
sucking at the windshield or adhering to the
dashboard.