



(12) **United States Patent**
Dalal et al.

(10) **Patent No.:** **US 10,915,160 B2**
(45) **Date of Patent:** **Feb. 9, 2021**

(54) **SYSTEM ON A CHIP WITH FAST WAKE FROM SLEEP**

(71) Applicant: **Apple Inc.**, Cupertino, CA (US)
(72) Inventors: **Anand Dalal**, San Jose, CA (US);
Joshua P. de Cesare, Campbell, CA (US)

(73) Assignee: **Apple Inc.**, Cupertino, CA (US)
(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **16/746,121**
(22) Filed: **Jan. 17, 2020**

(65) **Prior Publication Data**
US 2020/0150745 A1 May 14, 2020

Related U.S. Application Data
(63) Continuation of application No. 15/691,903, filed on Aug. 31, 2017, now Pat. No. 10,571,996, which is a (Continued)
(51) **Int. Cl.**
G06F 1/32 (2019.01)
G06F 9/44 (2018.01)
(Continued)
(52) **U.S. Cl.**
CPC **G06F 1/3287** (2013.01); **G06F 1/3209** (2013.01); **G06F 1/3215** (2013.01);
(Continued)
(58) **Field of Classification Search**
None
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,593,845 B1 7/2003 Friedman
6,748,548 B2 6/2004 Bormann et al.
(Continued)

FOREIGN PATENT DOCUMENTS

CN 1758183 A 4/2006
CN 103619056 A 3/2014
(Continued)

OTHER PUBLICATIONS


Search Report, International Application No. PCT/US2015/023824, dated Jun. 24, 2015, 5 pages.
(Continued)

Primary Examiner — Phil K Nguyen
Assistant Examiner — Cheri L Harrington
(74) *Attorney, Agent, or Firm* — Kowert, Hood, Munyon, Rankin & Goetzel, P.C.; Lawrence J. Merkel

(57) **ABSTRACT**

In an embodiment, a system on a chip (SOC) includes a component that remains powered when the remainder of the SOC is powered off. The component may include a sensor capture unit to capture data from various device sensors, and may filter the captured sensor data. Responsive to the filtering, the component may wake up the remainder of the SOC to permit the processing. The component may store programmable configuration data, matching the state at the time the SOC was most recently powered down, for the other components of the SOC, in order to reprogram them after wakeup. In some embodiments, the component may be configured to wake up the memory controller within the SOC and the path to the memory controller, in order to write the data to memory. The remainder of the SOC may remain powered down.

20 Claims, 10 Drawing Sheets

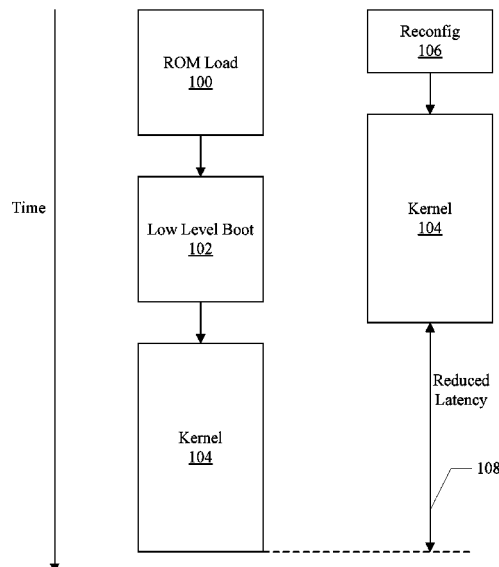

Related U.S. Application Data

continuation of application No. 14/289,775, filed on May 29, 2014, now Pat. No. 9,778,728.

(51) Int. Cl.

G06F 9/445 (2018.01)
G06F 1/3287 (2019.01)
G06F 9/4401 (2018.01)
G06F 1/3209 (2019.01)
G06F 1/3215 (2019.01)
G06F 1/3231 (2019.01)
G06F 1/3293 (2019.01)

(52) U.S. Cl.

CPC **G06F 1/3231** (2013.01); **G06F 1/3293** (2013.01); **G06F 9/4418** (2013.01); **G06F 9/44505** (2013.01); **Y02D 10/00** (2018.01); **Y02D 30/50** (2020.08)

(56)**References Cited****U.S. PATENT DOCUMENTS**

6,775,750 B2 8/2004 Krueger
 7,120,771 B2 10/2006 Dahan et al.
 7,797,523 B2 9/2010 Hobson et al.
 7,890,753 B2 2/2011 Dahan et al.
 7,991,992 B2 8/2011 Guan et al.
 8,112,618 B2 2/2012 Brokish
 8,583,953 B2 11/2013 Sultenfuss
 9,244,883 B2 1/2016 Park et al.
 9,323,314 B1 4/2016 Jia et al.
 9,541,984 B2 1/2017 Wen
 9,619,377 B2 4/2017 Tripathi et al.
 9,778,728 B2 10/2017 Dalal et al.
 10,031,000 B2 7/2018 Tripathi et al.
 10,261,894 B2 4/2019 Tripathi et al.
 10,488,230 B2 11/2019 Tripathi et al.
 10,571,996 B2 2/2020 Dalal et al.
 2003/0217299 A1 11/2003 Neuman
 2004/0221185 A1 11/2004 Bose
 2008/0168286 A1 7/2008 Tupman
 2008/0272826 A1 11/2008 Smit et al.
 2008/0282101 A1 11/2008 Adams
 2009/0259854 A1 10/2009 Cox
 2009/0259865 A1 10/2009 Sheynblat et al.
 2010/0131681 A1 5/2010 Reddy
 2011/0022859 A1 1/2011 More
 2011/0154484 A1 6/2011 Shimabe
 2011/0264934 A1 10/2011 Branover
 2012/0005526 A1 1/2012 Sela
 2012/0100895 A1 4/2012 Priyantha et al.
 2012/0102344 A1 4/2012 Kocev
 2012/0185717 A1 7/2012 Song et al.
 2012/0254878 A1 10/2012 Nachman et al.
 2012/0280917 A1 11/2012 Toksvig et al.
 2013/0044844 A1 2/2013 Kothari
 2013/0073884 A1 3/2013 Ulmer et al.
 2013/0111092 A1 5/2013 Heller et al.
 2013/0124891 A1 5/2013 Donaldson
 2013/0173938 A1 7/2013 Yang
 2013/0261814 A1 10/2013 Shrall et al.
 2013/0283079 A1* 10/2013 Puthiyedath G06F 1/3234
 713/323
 2013/0318382 A1 11/2013 Yoshihara
 2013/0326206 A1 12/2013 Lueck et al.
 2014/0009650 A1 1/2014 Kim et al.
 2014/0025975 A1 1/2014 Namgoong et al.
 2014/0032880 A1 1/2014 Ka
 2014/0059365 A1 2/2014 Heo et al.
 2014/0068302 A1* 3/2014 Falik G06F 1/3206
 713/323

2014/0075226 A1 3/2014 Heo et al.
 2014/0093143 A1 4/2014 Thompson
 2014/0115366 A1 4/2014 Joo et al.
 2014/0149754 A1 5/2014 Silva
 2014/0149770 A1 5/2014 Ahmad et al.
 2014/0223217 A1 8/2014 Nabhane
 2014/0253487 A1 9/2014 Bezing
 2014/0325197 A1* 10/2014 Lewis G06F 9/4418
 713/2
 2014/0369495 A1 12/2014 Muchsel
 2015/0089245 A1 3/2015 Altman
 2015/0106631 A1 4/2015 Bettendorff
 2015/0127300 A1 5/2015 Bluming et al.
 2015/0137938 A1 5/2015 Slaby
 2015/0149801 A1 5/2015 Vandermeijden
 2015/0220742 A1 8/2015 Ouyang
 2015/0248568 A1 9/2015 Offenber
 2015/0253833 A1 9/2015 Wells et al.
 2015/0277540 A1 10/2015 Jackson
 2015/0346799 A1 12/2015 Sengupta et al.
 2015/0346806 A1 12/2015 Dalal et al.
 2016/0018872 A1 1/2016 Tu
 2016/0278014 A1 9/2016 Chen
 2017/0255295 A1 9/2017 Tanemura
 2017/0364139 A1 12/2017 Dalal et al.


FOREIGN PATENT DOCUMENTS


DE 102013224175 A1 5/2014
 JP 2011520326 A 10/2009
 JP 2014509765 A 10/2012
 KR 120130107361 7/2012
 KR 1020130079076 7/2012
 KR 10-2014-002787 A 3/2014
 TW 200900913 A 1/2009
 TW 201342238 A 10/2013
 TW 201416971 A 5/2014
 WO 2010138605 A1 12/2010


OTHER PUBLICATIONS


Written Opinion, International Application No. PCT/US2015/023824, dated Jun. 24, 2015, 7 pages.
 U.S. Appl. No. 14/458,949, filed Aug. 13, 2014, Brijesh Tripathi.
 U.S. Appl. No. 14/463,763, filed Aug. 20, 2014, Joshua P. de Cesare.
 U.S. Appl. No. 14/458,885, filed Aug. 13, 2014, Brijesh Tripathi.
 Written Opinion, International Application No. PCT/US2015/020330, dated Jun. 8, 2015, 7 pages.
 Search Report, International Application No. PCT/US2015/020330, dated Jun. 8, 2015, 4 pages.
 Office Action, U.S. Appl. No. 14/458,949, Brijesh Tripathi, dated Mar. 14, 2016, 17 pages.
 Office Action, U.S. Appl. No. 14/463,763, Joshua P. de Cesare, dated Feb. 23, 2016, 22 pages.
 Final Office Action, U.S. Appl. No. 14/458,949, dated Aug. 23, 2016, 14 pages.
 Office Action, U.S. Appl. No. 14/458,885, dated Aug. 31, 2017, 8 pages.
 Jan Provoost, Wouldn't You Rather Stay at Home? Product Design & Development Magazine Jun. 27, 2011 <https://www.pddnet.com/article/2011/06/wouldnt-you-rather-stay-at-home>.
 MPU-6000 and MPU-6050 Product Specification Revision 3.4 [retrieved from internet on Aug. 17, 2017]. <URL: <https://www.invensense.com/wp-content/uploads/2015/02/MPU-6000-Datasheet1.pdf>> published on Aug. 19, 2013, 62 pages.
 Office Action, U.S. Appl. No. 15/447,328, dated May 25, 2018. <https://stackoverflow.com/questions/3315730/what-is-the-difference-between-the-operating-system-and-the-kernel>, May 1, 2014.


* cited by examiner

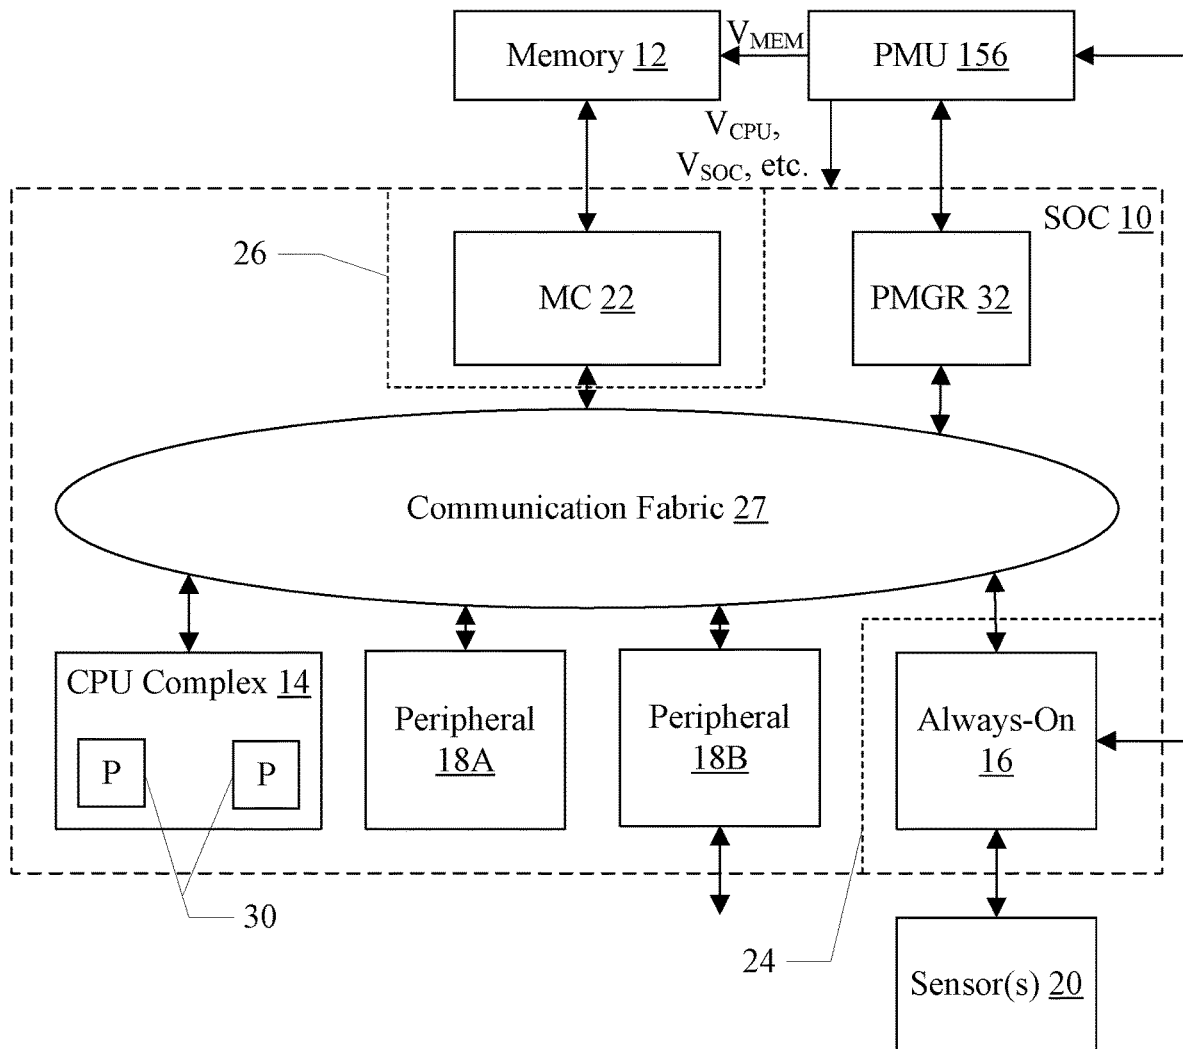
Fig. 1

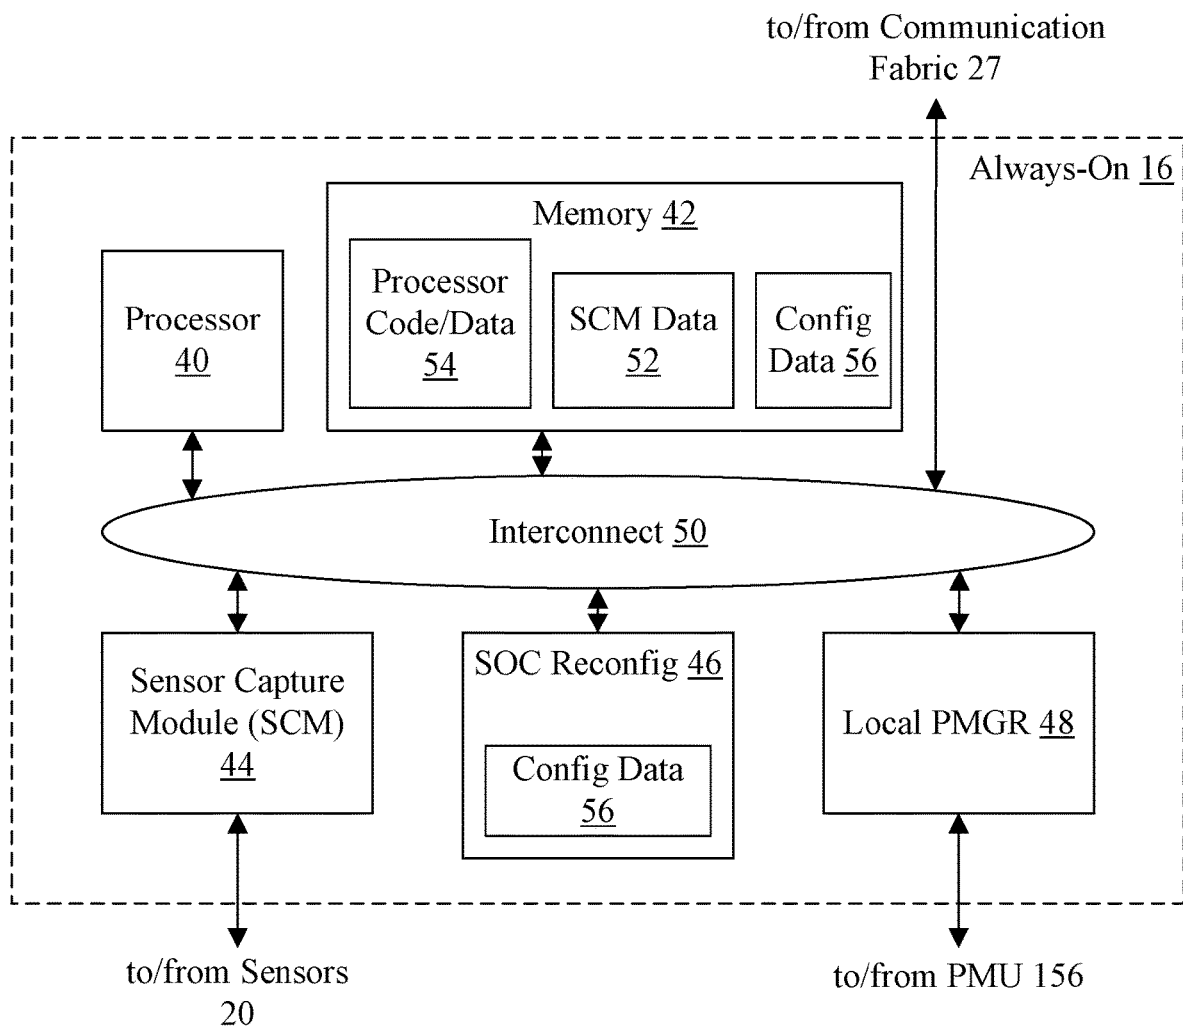Fig. 2

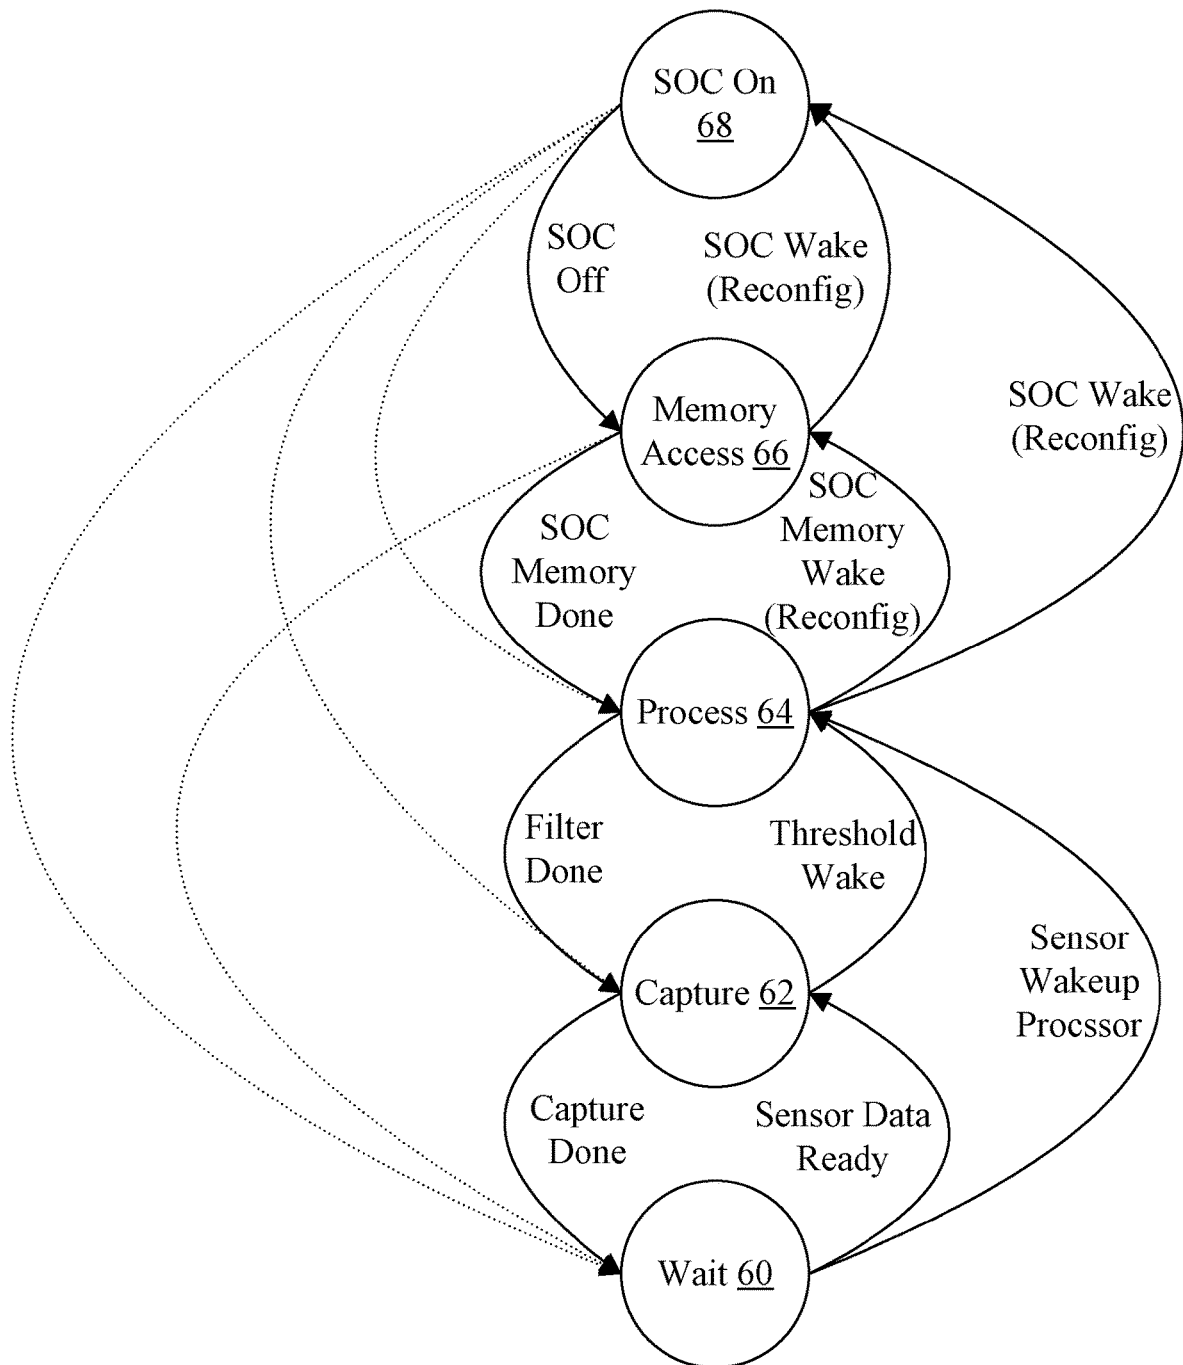Fig. 3

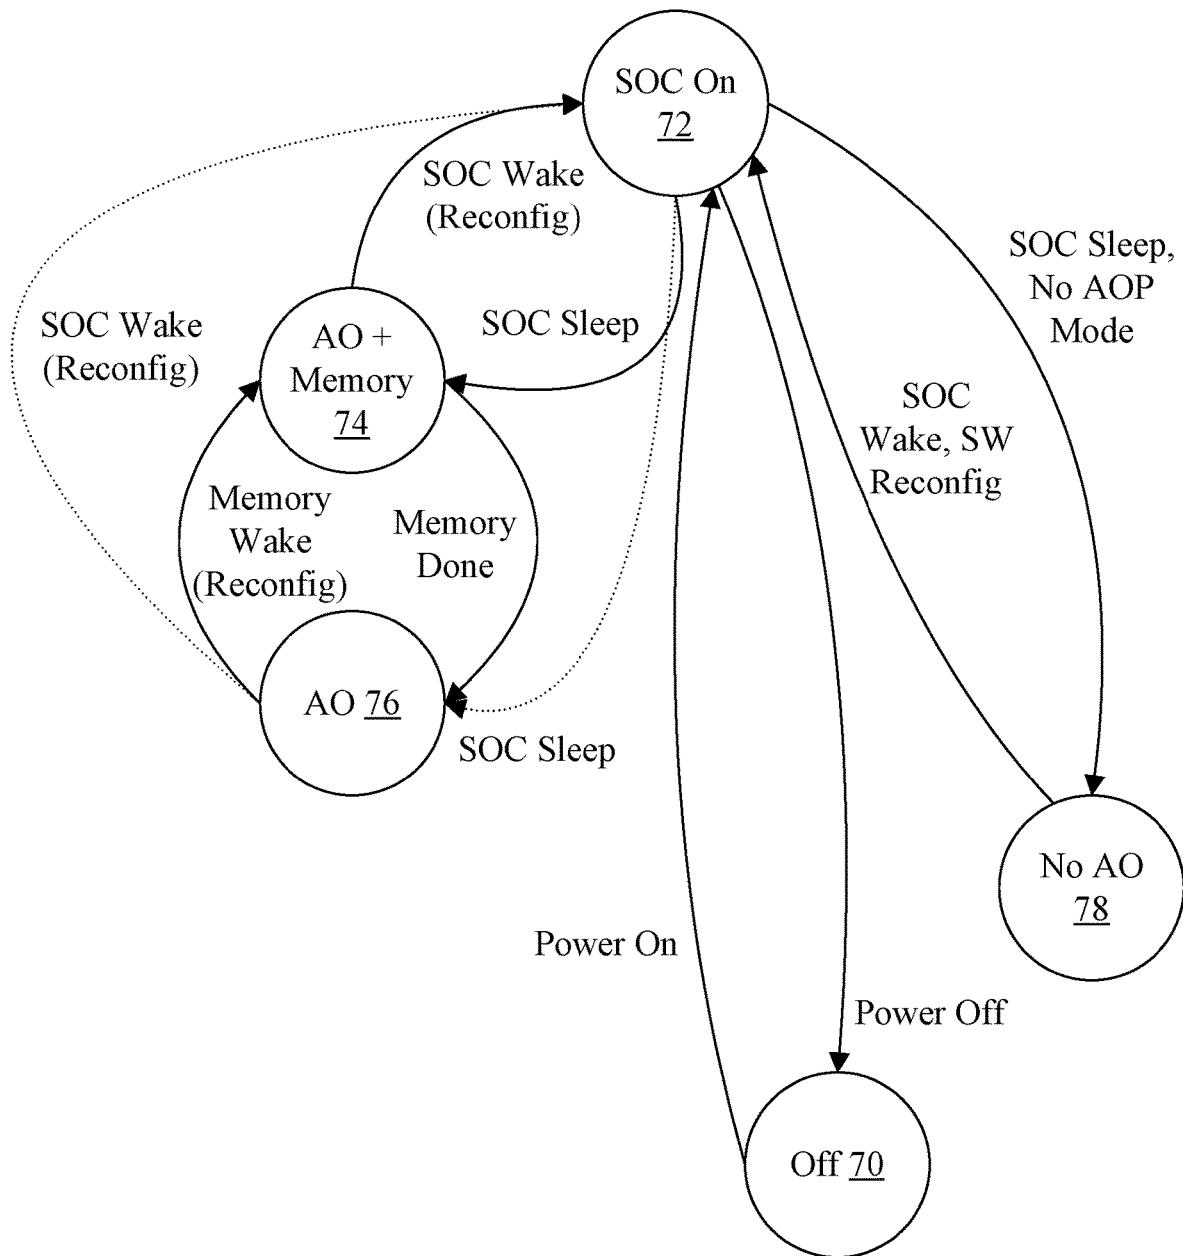Fig. 4

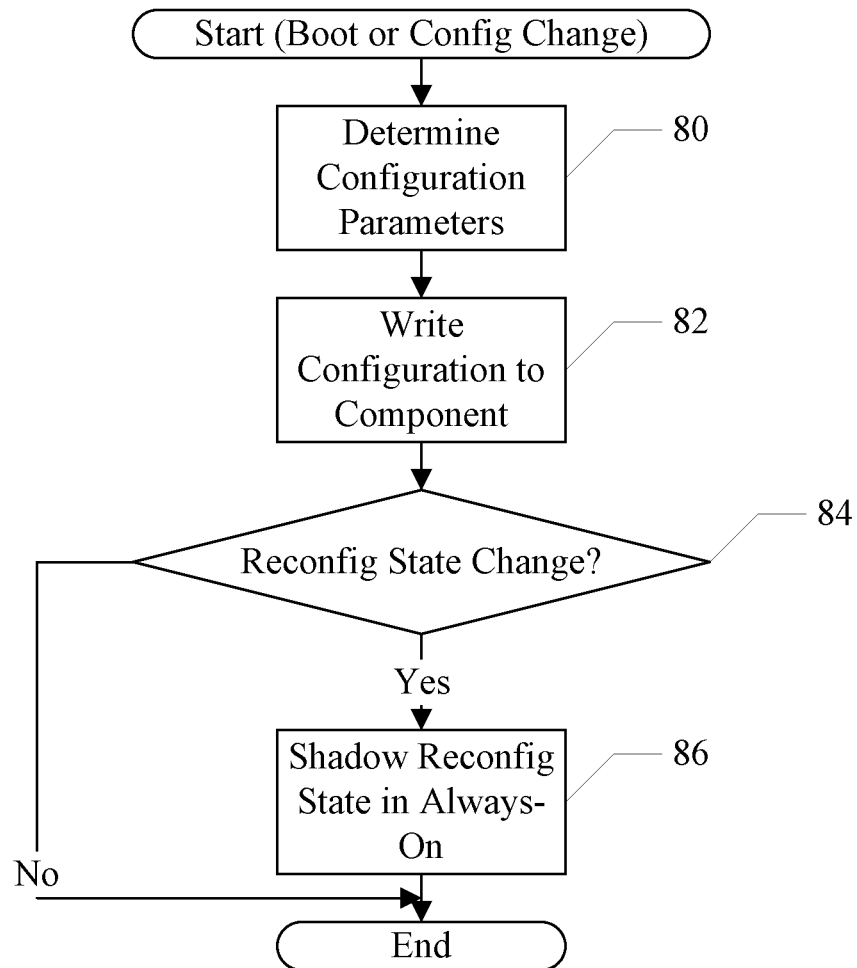Fig. 5

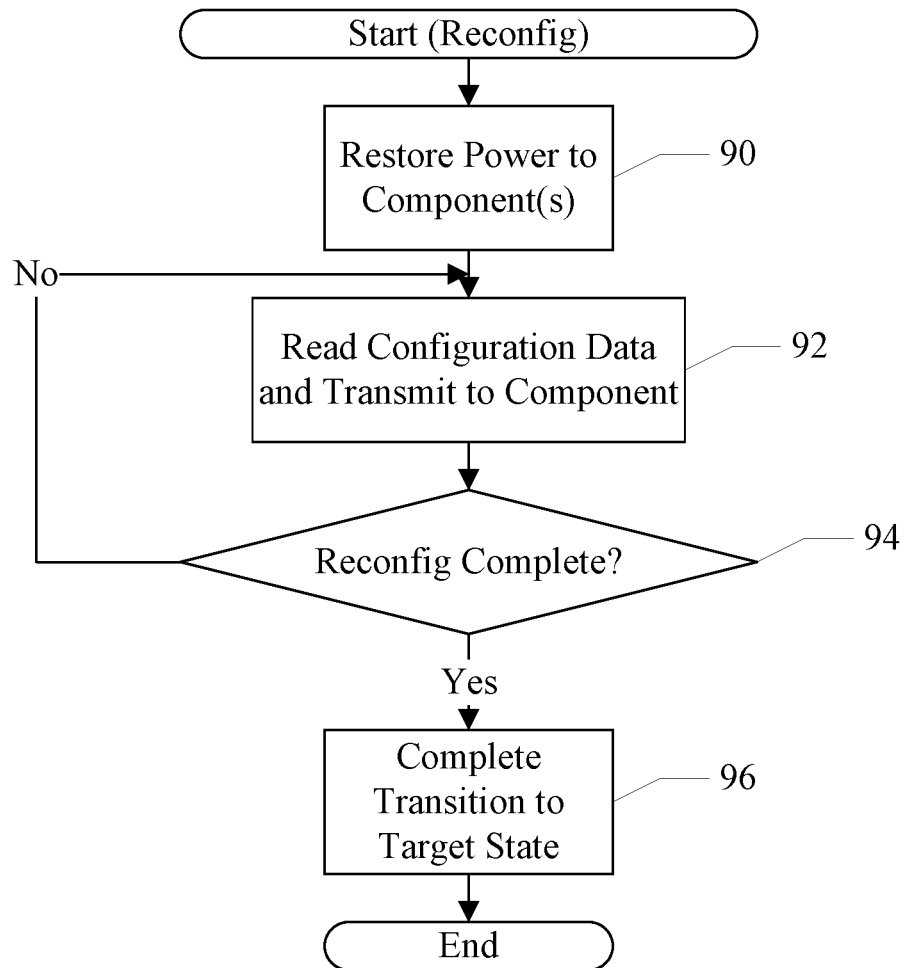Fig. 6

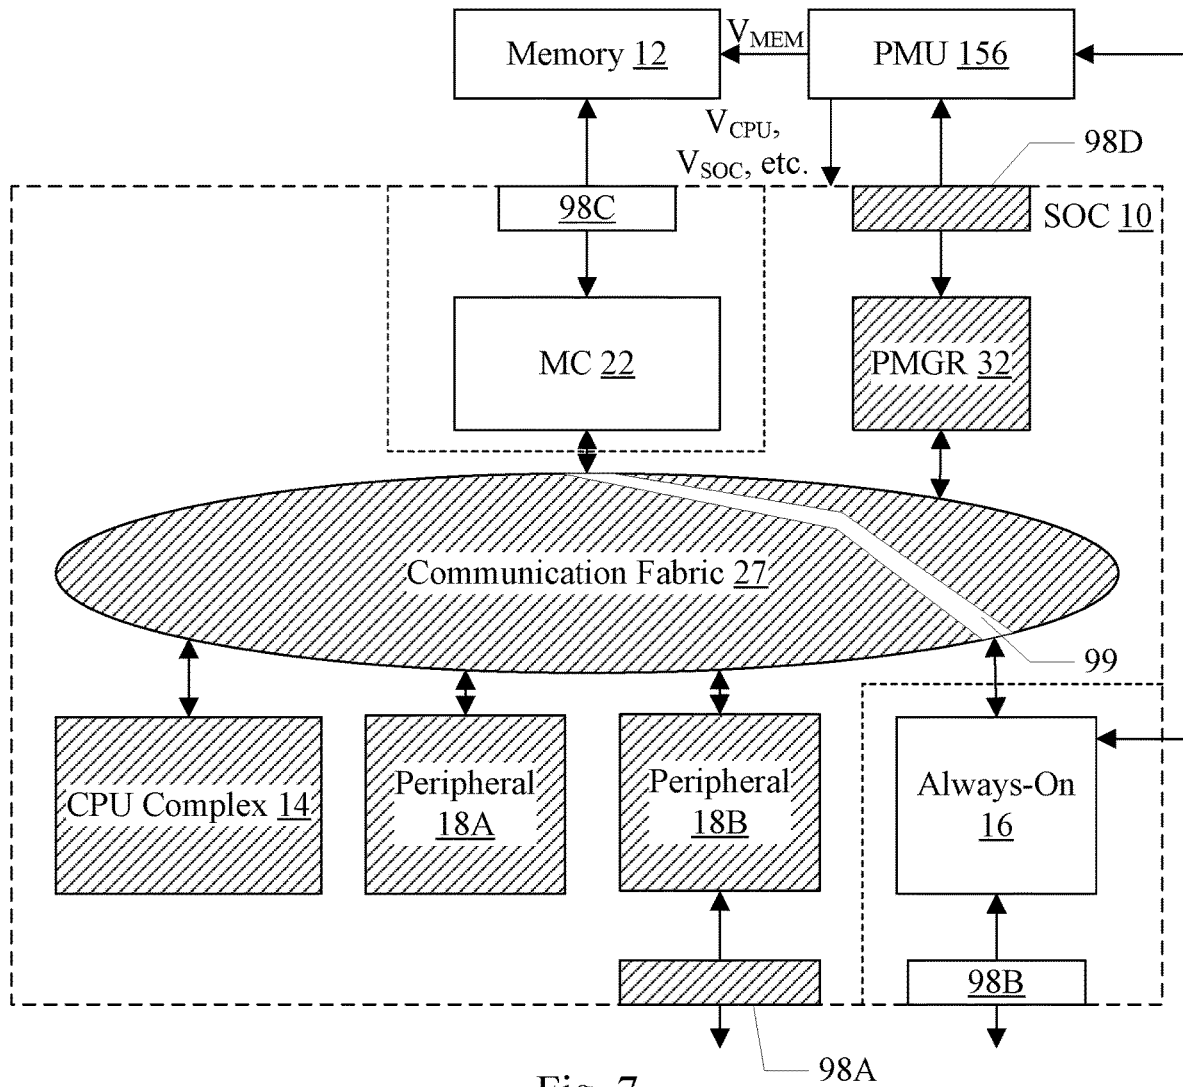
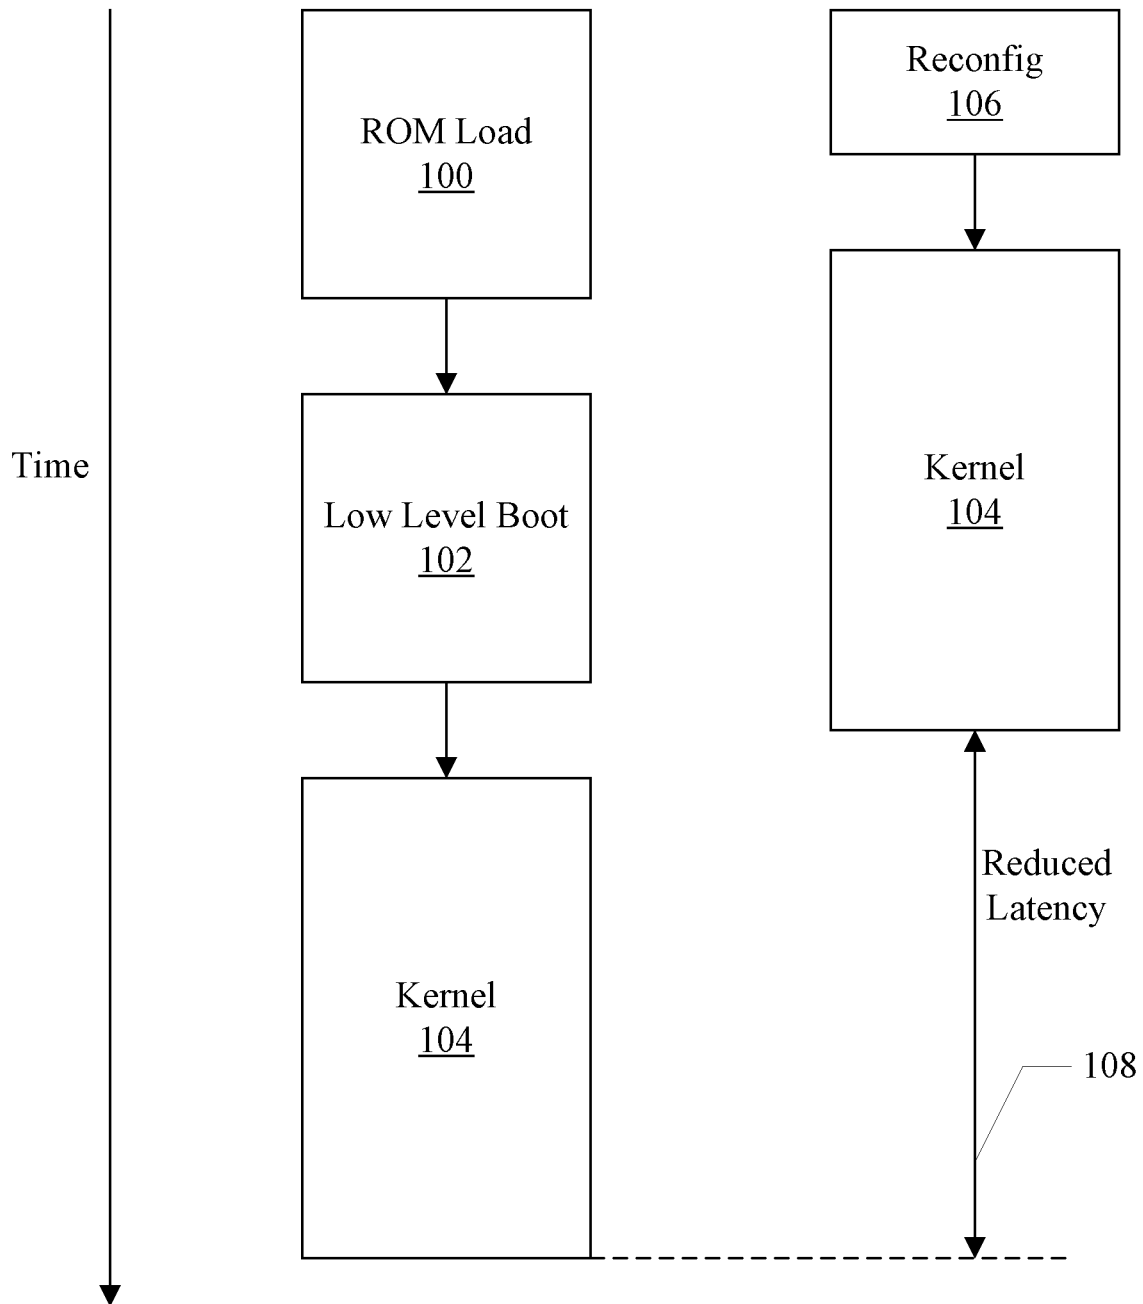
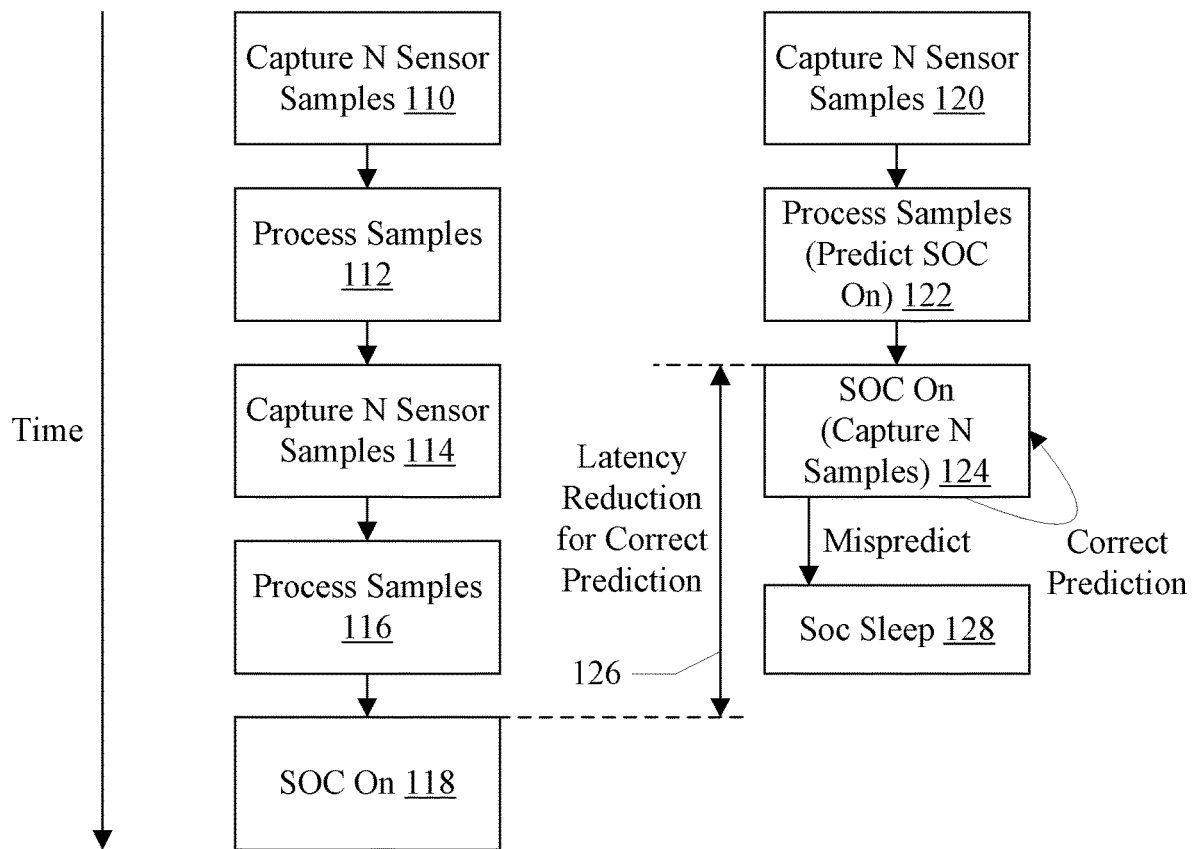
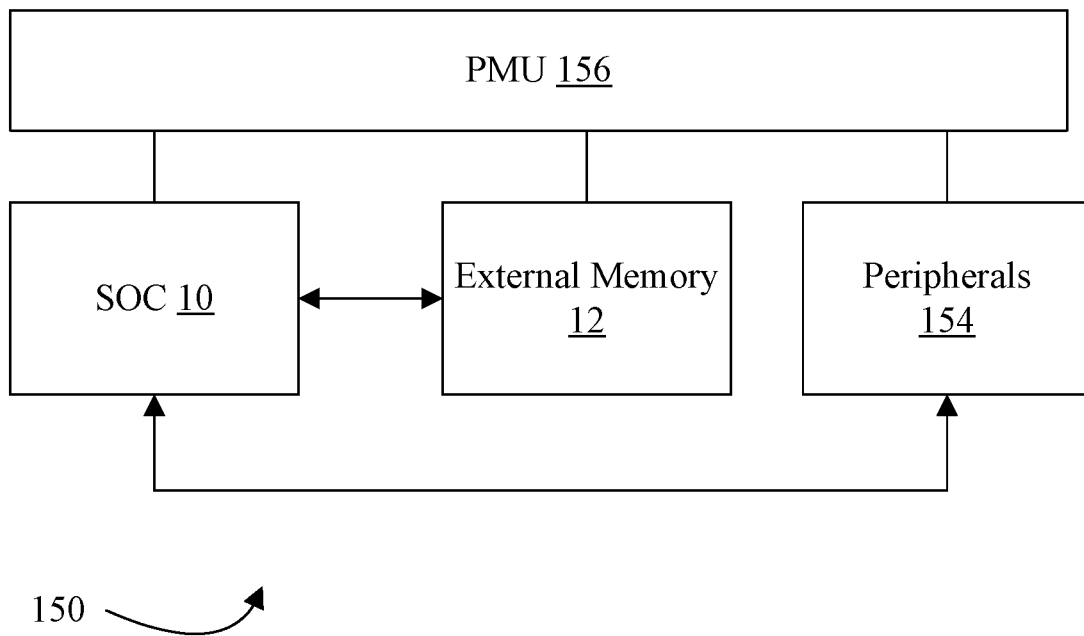
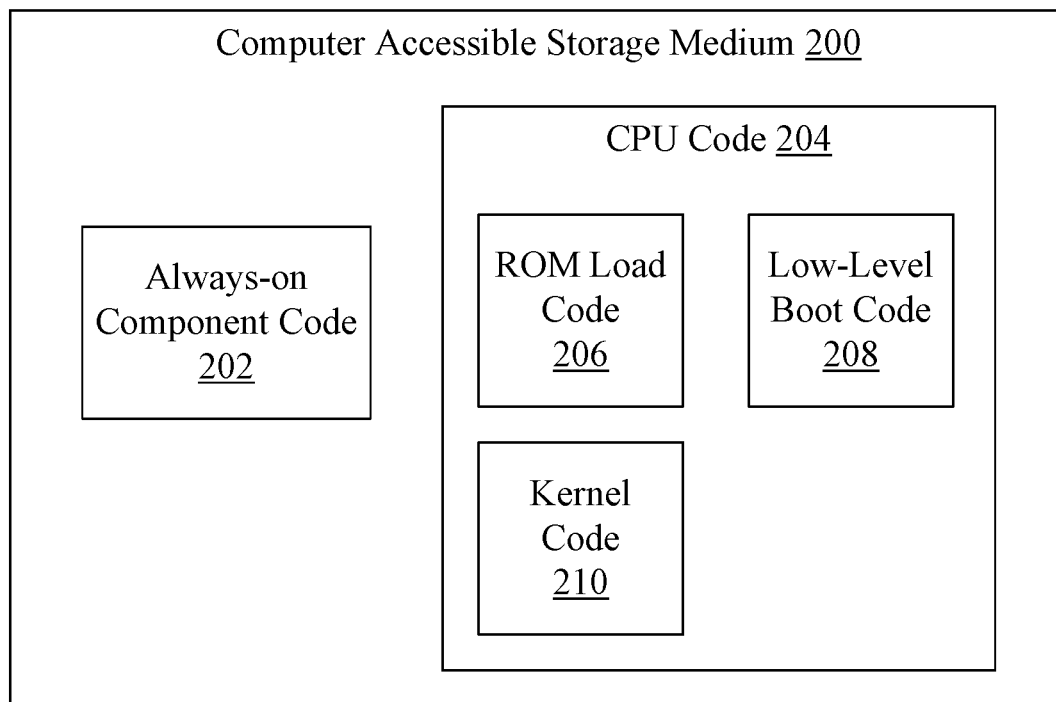


Fig. 7

Fig. 8

Fig. 9

Fig. 10Fig. 11

SYSTEM ON A CHIP WITH FAST WAKE FROM SLEEP

This application is a continuation of U.S. patent application Ser. No. 15/691,903, filed on Aug. 31, 2017 and now U.S. Pat. No. 10,571,996, which is a continuation of U.S. patent application Ser. No. 14/289,775, filed on May 29, 2014 and now U.S. Pat. No. 9,778,728. The above applications are incorporated by reference in their entireties.

BACKGROUND

Technical Field

Embodiments described herein are related to the field of systems on a chip (SOCs) and, more particularly, to an always-on block in an SOC.

Description of the Related Art

A variety of electronic devices are now in daily use with consumers. Particularly, mobile devices have become ubiquitous. Mobile devices may include cell phones, personal digital assistants (PDAs), smart phones that combine phone functionality and other computing functionality such as various PDA functionality and/or general application support, tablets, laptops, net tops, smart watches, wearable electronics, etc. Generally, a mobile device may be any electronic device that is designed to be carried by a user or worn by a user. The mobile device is typically battery powered so that it may operate away from a constant electrical source such as an electrical outlet.

Many mobile devices may operate in a “standby” mode much of the time. In the standby mode, the device may appear to be “off,” in as much as the device is not actively displaying content for the user and/or not actively performing functionality for the user. In the standby mode, much of the device may indeed be powered off. However, in the background, the device may be listening for phone calls or network packets, checking for alarms, reacting to movement, etc.

Because the mobile devices are often operating from a limited supply (e.g. a battery), energy conservation is a key design consideration for the devices. Including a system on a chip (SOC) can aid in energy conservation, since much of the functionality needed in the device can be included in the SOC. In “standby” mode and other low power modes, it is desirable to power down the SOC to eliminate leakage current losses, which are a significant factor in energy consumption in modern integrated circuit technologies. On the other hand, the SOC is needed for some of the standby functionality mentioned above.

SUMMARY

In an embodiment, an SOC includes a component that remains powered when the remainder of the SOC is powered off. The component may include a sensor capture unit configured to capture data from various device sensors. The captured sensor data may be buffered in a memory within the component. The component may further include a processor, in some embodiments, which may filter the captured sensor data searching for patterns that may indicate a need for further processing by the device. If the need for further processing is detected, the component may wake up (i.e. cause to power up and reprogram) the remainder of the SOC to permit the processing. Power/energy consumption may be

reduced while still supporting the capture of sensor data during times that the device is not actively in use, in some embodiments. For example, the power/energy efficiencies that may be obtained through integration of the component on the integrated circuit may be achieved while supporting the sensor data capture. The component may store programmable configuration data for the other components of the SOC in order to reprogram them after wakeup. The programmable configuration data may match the state of the component at the time the SOC was most recently powered down (while the component remained powered) or may be a different state desired for wakeup.

In some embodiments, the component may be configured to wake up both the memory controller within the SOC and the path to the memory controller, in order to write the data to memory. The remainder of the SOC may remain powered down. In this manner, the component may take advantage of the larger main memory to store data (e.g. sensor data) without waking the other components (e.g. including a central processing unit (CPU) processor or processors) to permit the transfer. Power/energy consumption may be reduced because only the needed components are powered up.

In some embodiments, the saving of the programmable configuration data and restoring the data from the component may reduce latency when powering up again from a powered down (e.g. sleep) state in the SOC. In some embodiments, the processing of data at one state (e.g. the processor in the component awake while the SOC is asleep) may result in speculation that a higher power/performance state may soon be needed. The SOC may transition speculatively to the state, and thus may be even lower latency to awaken if the speculation is accurate.

BRIEF DESCRIPTION OF THE DRAWINGS

The following detailed description makes reference to the accompanying drawings, which are now briefly described.

FIG. 1 is a block diagram of one embodiment of an SOC.

FIG. 2 is a block diagram of one embodiment of an always-on block in the SOC.

FIG. 3 is a block diagram of one embodiment of a state machine for the always-on block shown in FIG. 2.

FIG. 4 is a block diagram of another embodiment of a state machine for the always-on block shown in FIG. 2.

FIG. 5 is a flowchart illustrating operation of one embodiment of software executing on a CPU in the SOC during boot or configuration change.

FIG. 6 is a flowchart illustrating operation of one embodiment of the always-on block shown in FIG. 2 during reconfiguration.

FIG. 7 is a block diagram illustrating of one embodiment of the SOC in a memory-only communication state.

FIG. 8 is a block diagram illustrating latency reduction for one embodiment using the reconfiguration approach.

FIG. 9 is a block diagram illustrating one embodiment of speculative wake up for latency reduction.

FIG. 10 is a block diagram of one embodiment of a system including the SOC shown in FIG. 1.

FIG. 11 is a block diagram of one embodiment of a computer accessible storage medium.

While the embodiments described in this disclosure may be susceptible to various modifications and alternative forms, specific embodiments thereof are shown by way of example in the drawings and will herein be described in detail. It should be understood, however, that the drawings and detailed description thereto are not intended to limit the

embodiments to the particular form disclosed, but on the contrary, the intention is to cover all modifications, equivalents and alternatives falling within the spirit and scope of the appended claims. The headings used herein are for organizational purposes only and are not meant to be used to limit the scope of the description. As used throughout this application, the word “may” is used in a permissive sense (i.e., meaning having the potential to), rather than the mandatory sense (i.e., meaning must). Similarly, the words “include”, “including”, and “includes” mean including, but not limited to.

Various units, circuits, or other components may be described as “configured to” perform a task or tasks. In such contexts, “configured to” is a broad recitation of structure generally meaning “having circuitry that” performs the task or tasks during operation. As such, the unit/circuit/component can be configured to perform the task even when the unit/circuit/component is not currently on. In general, the circuitry that forms the structure corresponding to “configured to” may include hardware circuits. Similarly, various units/circuits/components may be described as performing a task or tasks, for convenience in the description. Such descriptions should be interpreted as including the phrase “configured to.” Reciting a unit/circuit/component that is configured to perform one or more tasks is expressly intended not to invoke 35 U.S.C. § 112(f) interpretation for that unit/circuit/component.

This specification includes references to “one embodiment” or “an embodiment.” The appearances of the phrases “in one embodiment” or “in an embodiment” do not necessarily refer to the same embodiment, although embodiments that include any combination of the features are generally contemplated, unless expressly disclaimed herein. Particular features, structures, or characteristics may be combined in any suitable manner consistent with this disclosure.

DETAILED DESCRIPTION OF EMBODIMENTS

Turning now to FIG. 1, a block diagram of one embodiment of an SOC 10 is shown coupled to a memory 12, at least one sensor 20, and a power management unit (PMU) 156. As implied by the name, the components of the SOC 10 may be integrated onto a single semiconductor substrate as an integrated circuit “chip.” In some embodiments, the components may be implemented on two or more discrete chips in a system. However, the SOC 10 will be used as an example herein. In the illustrated embodiment, the components of the SOC 10 include a central processing unit (CPU) complex 14, an “always-on” component 16, peripheral components 18A-18B (more briefly, “peripherals”), a memory controller 22, a power manager (PMGR) 32, and a communication fabric 27. The components 14, 16, 18A-18B, 22, and 32 may all be coupled to the communication fabric 27. The memory controller 22 may be coupled to the memory 12 during use. The PMGR 32 and the always-on component 16 may be coupled to the PMU 156. The PMU 156 may be configured to supply various power supply voltage to the SOC, the memory 12, and/or the sensors 20. The always-on component 16 may be coupled to the sensors 20. In the illustrated embodiment, the CPU complex 14 may include one or more processors (P 30 in FIG. 1). The processors 30 may form the CPU(s) of the SOC 10.

The always-on component 16 may be configured to remain powered up when other components of the SOC 10 (e.g. the CPU complex 14, the peripherals 18A-18B, and the PMGR 32) are powered down. More particularly, the always-on component 16 may be on whenever the SOC 10

is receiving power from the PMU 156. Thus, the always-on component is “always-on” in the sense that it may be powered if the SOC 10 is receiving any power (e.g. at times when the device including the SOC 10 is in standby mode or is operating actively), but may not be powered when the SOC 10 is not receiving any power (e.g. at times when the device is completely turned off). The always-on component 16 may support certain functions while the remainder of the SOC 10 is off, allowing low power operation.

In FIG. 1, a dotted line 24 separating the always-on component 16 from the other components may indicate an independent power domain for the always-on component 16. Similarly, in the illustrated embodiment, a dotted line 26 may represent an independent memory controller power domain for the memory controller 22. Other components, groups of components, and/or subcomponents may have independent power domains as well. Generally, a power domain may be configured to receive supply voltage (i.e. be powered on) or not receive supply voltage (i.e. be powered off) independent of other power domains. In some embodiments, power domains may be supplied with different supply voltage magnitudes concurrently. The independence may be provided in a variety of fashions. For example, the independence may be provided by providing separate supply voltage inputs from the PMU 156, by providing power switches between the supply voltage inputs and components and controlling the power switches for a given domain as a unit, and/or a combination of the above. There may be more power domains than those illustrated in FIG. 1 as well. For example, the CPU complex 14 may have an independent power domain (and each CPU processor 30 may have an independent power domain as well) in an embodiment. One or more peripheral components 18A-18B may be in one or more independent power domains in an embodiment.

As illustrated in FIG. 1, the always-on component 16 may be coupled to at least one sensor 20 (and may be coupled to multiple sensors 20). The always-on component 16 may be configured to read the sensor data from the sensors 20 while the SOC 10 is powered off (in addition to the times when the SOC 10 is powered on). The always-on component 16 may include a memory (not shown in FIG. 1) to buffer the sensor data, and the remainder of the SOC 10 need not be powered up unless the memory (or a portion thereof allocated to store sensor data) fills with data (or reaches a threshold level of fullness). In some embodiments, the always-on component 16 may be configured to process the sensor data in some fashion as well. For example, the always-on component 16 may be configured to filter the sensor data. Filtering data may generally refer to one or more of: searching for a pattern or other data properties that indicate that the sensor data should be further processed by the processors in the CPU complex 14; manipulating the data to detect/remove noise in the data; further processing data that appears to match a pattern or other property to eliminate false positive matches; etc.

The sensors 20 may be any devices that are configured to detect or measure aspects of the physical environment of a device that includes the sensors. For example, a sensor may include an accelerometer which measures acceleration of the device. An accelerometer may be directional (measuring acceleration in a predetermined direction) or vector (measuring acceleration in multiple dimensions and producing a vector indicating the acceleration and its direction). Multiple directional accelerometers may be employed to permit vector acceleration sensing as well as directional acceleration sensing. Another example of a sensor may be gyroscope (or gyro). The gyroscope may be used to detect the orientation

of the device and/or changes in orientation. Like the accelerometer, the gyroscope may be directional or multidimensional, and/or multiple directional gyroscopes may be used. Yet another sensor may be a magnetometer, which may be used to measure magnetic orientation and thus may be used to form a compass. In other embodiments, the compass functionality may be embedded in the sensor. Another sensor may be an audio detector (e.g. a microphone). The audio detector may capture sound and generate data indicative of the sound. Another sensor may be a photodetector that detects light or other electromagnetic energy. Other exemplary sensors may include an altimeter to detect altitude, a temperature sensor, and/or a pressure sensor. Still another sensor may be a user interface device such as a button, a touch screen, a keyboard, a pointing device, a camera, etc. Any set of sensors may be employed.

As mentioned above, the always-on component 16 may be configured to buffer data in a memory within the component. If the buffer is nearing full, the always-on component 16 may be configured to wake the memory controller 22 in order to write the sensor data to the memory 12. In some embodiments, the always-on component 16 may be configured to write results of filtering the data to the memory 12. In some embodiments, the always-on component 16 may perform other processing tasks while the rest of the SOC 10 is powered down. To the extent that these tasks access the memory 12, the always-on component 16 may be configured to wake the memory controller 22. In addition, the always-on component 16 may be configured to wake at least a portion of the communication fabric 27 (i.e. the portion that connects the always-on component 16 to the memory controller 22).

Using this memory-only communication mode, the always-on component 16 may be able to access the memory 12 and take advantage of the significant storage available in the memory 12 while expending a relatively low amount of energy/power, since the remainder of the SOC 10 remains powered down. The always-on component 16 may store programmable configuration data for the memory controller 22, so that the always-on component 16 may program the memory controller 22 once power is restored. That is, the always-on component 16 may be configured to program the memory controller 22 in a manner similar to the way the operating system would program the memory controller 22 during boot of the device including the SOC 10. The programmable configuration data stored by the always-on component 16 may be the configuration data that was in the memory controller 22 when the SOC 10 (except for the always-on component 16) was most recently powered down, in one embodiment. In another embodiment, the programmable configuration data may be a configuration that is known to work for any previous configuration of the memory controller 22 and/or any configuration of the memory 12. The known-good configuration may, e.g., be a configuration that is acceptable in performance for the memory accesses by the always-on component 16.

When the SOC 10 is powered down with the always-on component 16 remaining powered, part of the power down sequence may be to place the memory 12 in a retention mode. For example, for dynamic random access memory (DRAM) embodiments of the memory 12, the retention mode may be a "self-refresh" mode. In retention mode, the memory 12 may not be externally accessible until the mode is changed. However, the contents of the memory 12 may be preserved. For example, in the self-refresh mode, the DRAM may perform the periodic refreshes needed to retain data

(which are normally performed by the memory controller 22, when the memory controller 22 is powered on).

In some embodiments, the always-on component 16 may further store programmable configuration data for other components in the SOC 10. The programmable configuration data may reflect the state of the components at the time that the remainder of the SOC 10 was most recently powered down. The always-on component 16 may be configured to wake the SOC 10 for processing, and may reprogram the components with the stored programmable configuration data. The process of restoring state to the components based on the stored programmable configuration data may be referred to as reconfiguration. Again, similar to the memory-only communication mode discussed above, the state that is restored to the components may be the state at the most recent power down of the component or may be a known-good state with acceptable performance for restarting the SOC 10 for operation. In the latter case, the state may be modified to a higher performance state after the reconfiguration has completed.

Restoring state using the reconfiguration functionality in the always-on component 16 may be a lower latency operation than restoring power in the SOC 10 and then initializing the SOC 10 and the operating system in a manner similar to a cold boot. During the initialization without the always-on component 16, the operating system discovered that the SOC 10 was previously powered down with system state stored in the memory 12, and bypassed some initialization operations. However, the latency of the restore was greater than desired. Additional details for one embodiment are discussed in more detail below.

The always-on component 16 may be configured to communicate with the PMU 156, in addition to the communication of the PMGR 32 to the PMU 156. The interface between the PMU 156 and the always-on component 16 may permit the always-on component 16 to cause components to be powered up (e.g. the memory controller 22, or the other components of the SOC 10) when the PMGR 32 is powered down. The interface may also permit the always-on component 16 to control its own power state as well.

Generally, a component may be referred to as powered on or powered off. The component may be powered on if it is receiving supply voltage so that it may operate as designed. If the component is powered off, then it is not receiving the supply voltage and is not in operation. The component may also be referred to as powered up if it is powered on, and powered down if it is powered off. Powering up a component may refer to supplying the supply voltage to a component that is powered off, and powering down the component may refer to terminating the supply of the supply voltage to the component. Similarly, any subcomponent and/or the SOC 10 as a whole may be referred to as powered up/down, etc. A component may be a predefined block of circuitry which provides a specified function within the SOC 10 and which has a specific interface to the rest of the SOC 10. Thus, the always-on component 16, the peripherals 18A-18B, and the CPU complex 14, the memory controller 22, and the PMGR 32 may each be examples of a component.

A component may be active if it is powered up and not clock gated. Thus, for example, a processor in the CPU complex 14 may be available for instruction execution if it is active. A component may be inactive if it is powered off or in another low power state in which a significant delay may be experienced before instructions may be executed. For example, if the component requires a reset or a relock of a phase lock loop (PLL), it may be inactive even if it remains

powered. A component may also be inactive if it is clock gated. Clock gating may refer to techniques in which the clock to the digital circuitry in the component is temporarily “turned off,” preventing state from being captured from the digital circuitry in clocked storage devices such as flops, registers, etc.

As mentioned above, the CPU complex **14** may include one or more processors **30** that may serve as the CPU of the SOC **10**. The CPU of the system includes the processor(s) that execute the main control software of the system, such as an operating system. Generally, software executed by the CPU during use may control the other components of the system to realize the desired functionality of the system. The processors may also execute other software, such as application programs. The application programs may provide user functionality, and may rely on the operating system for lower-level device control, scheduling, memory management, etc. Accordingly, the processors may also be referred to as application processors. The CPU complex **14** may further include other hardware such as an L2 cache and/or an interface to the other components of the system (e.g. an interface to the communication fabric **27**).

An operating point may refer to a combination of power supply voltage magnitude and operating frequency for the CPU complex **14**, the always-on component **16**, other components of the SOC **10**, etc. The operating frequency may be the frequency of the clock that clocks the component. The operating frequency may also be referred to as the clock frequency or simply the frequency. The operating point may also be referred to as an operating state or power state. The operating point may be part of the programmable configuration data that may be stored in the always-on component **16** and reprogrammed into the components when reconfiguration occurs.

Generally, a processor may include any circuitry and/or microcode configured to execute instructions defined in an instruction set architecture implemented by the processor. Processors may encompass processor cores implemented on an integrated circuit with other components as a system on a chip (SOC **10**) or other levels of integration. Processors may further encompass discrete microprocessors, processor cores and/or microprocessors integrated into multichip module implementations, processors implemented as multiple integrated circuits, etc.

The memory controller **22** may generally include the circuitry for receiving memory operations from the other components of the SOC **10** and for accessing the memory **12** to complete the memory operations. The memory controller **22** may be configured to access any type of memory **12**. For example, the memory **12** may be static random access memory (SRAM), dynamic RAM (DRAM) such as synchronous DRAM (SDRAM) including double data rate (DDR, DDR2, DDR3, DDR4, etc.) DRAM. Low power/mobile versions of the DDR DRAM may be supported (e.g. LPDDR, mDDR, etc.). The memory controller **22** may include queues for memory operations, for ordering (and potentially reordering) the operations and presenting the operations to the memory **12**. The memory controller **22** may further include data buffers to store write data awaiting write to memory and read data awaiting return to the source of the memory operation. In some embodiments, the memory controller **22** may include a memory cache to store recently accessed memory data. In SOC implementations, for example, the memory cache may reduce power consumption in the SOC by avoiding reaccess of data from the memory **12** if it is expected to be accessed again soon. In some cases, the memory cache may also be referred to as a

system cache, as opposed to private caches such as the L2 cache or caches in the processors, which serve only certain components. Additionally, in some embodiments, a system cache need not be located within the memory controller **22**.

The peripherals **18A-18B** may be any set of additional hardware functionality included in the SOC **10**. For example, the peripherals **18A-18B** may include video peripherals such as an image signal processor configured to process image capture data from a camera or other image sensor, display controllers configured to display video data on one or more display devices, graphics processing units (GPUs), video encoder/decoders, scalers, rotators, blenders, etc. The peripherals may include audio peripherals such as microphones, speakers, interfaces to microphones and speakers, audio processors, digital signal processors, mixers, etc. The peripherals may include interface controllers for various interfaces external to the SOC **10** (e.g. the peripheral **18B**) including interfaces such as Universal Serial Bus (USB), peripheral component interconnect (PCI) including PCI Express (PCIe), serial and parallel ports, etc. The peripherals may include networking peripherals such as media access controllers (MACs). Any set of hardware may be included.

The communication fabric **27** may be any communication interconnect and protocol for communicating among the components of the SOC **10**. The communication fabric **27** may be bus-based, including shared bus configurations, cross bar configurations, and hierarchical buses with bridges. The communication fabric **27** may also be packet-based, and may be hierarchical with bridges, cross bar, point-to-point, or other interconnects.

The PMGR **32** may be configured to control the supply voltage magnitudes requested from the PMU **156**. There may be multiple supply voltages generated by the PMU **156** for the SOC **10**. For example, illustrated in FIG. **1** are a V_{CPU} and a V_{SOC} . The V_{CPU} may be the supply voltage for the CPU complex **14**. The V_{SOC} may generally be the supply voltage for the rest of the SOC **10** outside of the CPU complex **14**. For example, there may be separate supply voltages for the memory controller power domain and the always-on power domain, in addition to the V_{SOC} for the other components. In another embodiment, V_{SOC} may serve the memory controller **22**, the always-on component **16**, and the other components of the SOC **10** and power gating may be employed based on the power domains. There may be multiple supply voltages for the rest of the SOC **10**, in some embodiments. In some embodiments, there may also be a memory supply voltage for various memory arrays in the CPU complex **14** and/or the SOC **10**. The memory supply voltage may be used with the voltage supplied to the logic circuitry (e.g. V_{CPU} or V_{SOC}), which may have a lower voltage magnitude than that required to ensure robust memory operation. The PMGR **32** may be under direct software control (e.g. software may directly request the power up and/or power down of components) and/or may be configured to monitor the SOC **10** and determine when various components are to be powered up or powered down.

The PMU **156** may generally include the circuitry to generate supply voltages and to provide those supply voltages to other components of the system such as the SOC **10**, the memory **12** (V_{MEM} in FIG. **1**), various off-chip peripheral components (not shown in FIG. **1**) such as display devices, image sensors, user interface devices, etc. The PMU **156** may thus include programmable voltage regulators, logic to interface to the SOC **10** and more particularly the PMGR **32** to receive voltage requests, etc.

It is noted that the number of components of the SOC 10 (and the number of subcomponents for those shown in FIG. 1, such as within the CPU complex 14) may vary from embodiment to embodiment. There may be more or fewer of each component/subcomponent than the number shown in FIG. 1.

Turning now to FIG. 2, a block diagram of one embodiment of the always-on component 16 is shown. In the illustrated embodiment, the always-on component 16 may include a processor 40, a memory 42, a sensor capture module (SCM) 44, an SOC reconfiguration circuit 46, a local PMGR 48, and an interconnect 50. The processor 40, the memory 42, the SCM 44, the SOC reconfiguration circuit 46, and the local PMGR 48 are coupled to the interconnect 50. The SCM 44 may also be referred to as a sensor capture unit or a sensor capture circuit.

The sensor capture module 44 may be coupled to the sensors 20 when the SOC 10 is included in a system, and may be configured to capture data from the sensors 20. In the illustrated embodiment, the sensor capture module 44 may be configured to write the captured sensor data to the memory 42 (SCM Data 52). The memory 42 may be an SRAM, for example. However, any type of memory may be used in other embodiments.

The SCM data 52 may be stored in locations that are preallocated by the always-on component 16 to store captured sensor data. As the locations are consumed, the amount of available memory to store captured data decreases. The sensor capture module 44 may be programmed with a watermark or other indication of fullness in the allocation memory area (generally, e.g., a "threshold"), and the sensor capture module 44 may be configured to wake the memory controller 22 to write the captured sensor data to memory 12. Alternatively, the processor 40 may be configured to write the captured sensor data to memory 12. In such a case, the sensor capture module 44 may be configured to wake the processor 40.

The processor 40 may be configured to execute code stored in the memory 42 (processor code/data 54). The code may include a series of instructions which, when executed, cause the processor 40 to implement various functions. For example, the code may include filter code which may be executed by the processor 40 to filter the SCM data 52, as discussed above. Responsive to detecting a desired pattern or other data attribute(s) in the SCM data 52, the processor 40 may be configured to wake the memory controller 22 to update the memory 12 and/or to wake the SOC 10.

The processor code/data 54 may be initialized upon boot of a device including the SOC 10. The code may be stored in a non-volatile memory on the SOC 10 or elsewhere in the device, and may be loaded into the memory 42, for example. A local non-volatile memory such as read-only memory (ROM) may also be used in some embodiments.

In an embodiment, the processor 40 may be a smaller, more power efficient processor than the CPU processors 30 in the CPU complex 14. Thus, the processor 40 may consume less power when active than the CPU processors 30 consume. There may also be fewer processors 40 than there are CPU processors 30, in an embodiment.

The SOC reconfiguration circuit 46 may be configured to store the programmable configuration data 56 for the memory controller 22 and the other components of the SOC 10, to reprogram various components responsive to powering the components back up from a powered off state. Alternatively, the programmable configuration data 56 may be stored in the memory 42, or in a combination of the memory 42 and the SOC reconfiguration circuit 46. The

configuration data 56 may be written to the circuit 46 by the CPU processors 30, e.g. as part of programming the corresponding component. That is, the CPU processors 30 (executing operating system software, for example, as part of the boot of the device and/or at other times when the configuration is changed) may write the data to the SOC reconfiguration circuit 46. Alternatively, in some embodiments, the SOC reconfiguration circuit 46 may have hardware that monitors and shadows the configuration state. In some embodiments, at least a portion of the programmable configuration data 56 may be predetermined and may be stored in a non-volatile memory such as a ROM, rather than being written to the memory 42 and/or the SOC reconfiguration circuit 46.

In an embodiment, the SOC reconfiguration circuit 46 may include logic circuitry configured to process the programmable configuration data 56 and to write the data to the corresponding components in the SOC 10 after the SOC 10 is powered up again. The programmable configuration data 56 may include a series of register addresses to be written and the data to write to those registers. In some embodiments, the programmable configuration data 56 may further include read commands to read registers, e.g. polling for an expected value that indicates that the initialization performed by various writes is complete and/or the corresponding state is in effect in the component. The expected value may be the entire value read, or may be a portion of the value (e.g. the expected value may include a value and a mask to be applied to the read value prior to comparison). In some embodiments, the programmable configuration data 56 may further include read-modify-write commands to read registers, modify a portion of the read data, and write the modified data back to the register. For example, a second mask may be used to determine which portion of the register value is to be updated. The portion of the register masked by the second mask may not be updated when the value is written to the register.

In another embodiment, the SOC reconfiguration circuit 46 may include another processor and corresponding memory storing code for the processor (or the code may also be stored in the memory 42). The code, when executed by the processor, may cause the processor to configure the various components in the SOC 10 with the programmable configuration data 56. The code may implement the polling features described above as part of the structure of the code itself, or the programmable configuration data 56 may store the address to poll and the expected value, similar to the above discussion. In another embodiment, the processor 40 may execute software to reprogram the components of the SOC 10.

The programmable configuration data 56 may include data for the memory controller 22, separate data for other components of the SOC 10, and separate data for the reconfiguring the processor 40 when it is powered up. When powering up the memory controller 22 while the remainder of the SOC 10 is powered down, the data for the memory controller 22 may be processed. The data may include programmable configuration data for the memory controller 22. The data may further include additional programmable configuration data, in an embodiment. For example, programmable configuration data for the communication fabric 27 may be included. Programmable configuration data may be included for whichever components are used in communication between the always-on component 16 and the memory controller 22. When powering up the remainder of the SOC 10, the data for the other components may be

11

processed. Similarly, when powering up the processor 40, the programmable configuration data for the processor 40 may be processed.

In some embodiments, the SOC reconfiguration circuit 46 may be configured to provide programmable configuration data to components of the SOC 10 at more than one point in the power up of the SOC 10. For example, some programmable reconfiguration data may be provided near the beginning of the transition to powered on (e.g., shortly after the power supply voltage is stable), and other programmable reconfiguration data may be provided nearer the end of the transition to powered on. Furthermore, in some embodiments, the programmable configuration data 56 may be only a portion of the programmable configuration to be established in the components of the SOC 10. The remainder of the programmable configuration may be stored in the memory 12. For example, operating system software executing on the CPU processors 30 may capture the programmable configuration in the memory 12 prior to powering down. The restoration of programmable configuration data stored in the memory 12 may be performed by the SOC reconfiguration circuit 46, other hardware, and/or the operating system software after the CPU processors 30 have been released from reset and begin execution again.

The local PMGR 48 may be configured to handle power management functions within the always-on component 16, in a manner similar to the PMGR 32 in FIG. 1 for the SOC 10 as a whole. The always-on component 16 may support multiple power states, and the local PMGR 48 may assist with transitions between those states. The local PMGR 48 may be configured to communicate with the PMU 156 to support state changes, as well as to manage the providing of supply voltages to various components of the SOC 10 as part of waking up or putting to sleep various components.

The interconnect 50 may comprise any interconnect to transmit communications between the various subcomponents shown in FIG. 2, as well as to communicate over the communication fabric 27 with other components of the SOC 10. The interconnect may include any of the examples of the communication fabric 27 discussed above with regard to FIG. 1, as desired, in various embodiments.

Turning now to FIG. 3, a block diagram of one embodiment of a state machine that may be implemented in one embodiment of the always-on component 16 is shown. In the illustrated embodiment, the states include a wait state 60, a capture state 62, a process state 64, a memory access state 66, and an SOC on state 68. Transitions between the states are illustrated with solid lines, and certain additional possible transitions are indicated with dotted lines. Not all possible transitions are illustrated in FIG. 3 to avoid obscuring the drawing.

The states illustrated in FIG. 3 may be in order of relative power/energy consumption, with the wait state 60 being the lowest-power state and the SOC on state 68 being the highest-power state. In the wait state 60, the subcomponents of the always-on component 16 may be either power gated or clock gated. For example, in an embodiment, the processor 40 may be power gated and the SCM 44 may be clock-gated. The memory 42 may be in retention mode or may be powered normally. The SOC reconfiguration circuit 46 and the local PMGR 48 may be clock gated. Any combination of clock gating and power gating may be used among the subcomponents.

In the wait state 60, the always-on component 16 may be essentially idle. The state machine may transition from the wait state 60 to the capture state 62 when sensor data is ready to be captured by the SCM 44 from the sensors 20. In one

12

embodiment, a timer (e.g. a watchdog timer) within the always-on component 16 (not expressly shown in FIG. 2) may periodically cause the transition from the wait state 60 to the capture state 62. There may or may not be sensor data to capture in this case. In one embodiment, the sensors may assert a signal to the always-on component 16 to indicate that sensor data is available for capture. In either case, the transition to the capture state 62 may be performed.

In the illustrated embodiment, the state machine may also transition directly from the wait state 60 to the process state 64. This transition may be supported if a sensor is configured to signal the always-on component 16 that processor support (from the processor 40) is desired. The signal may be separate from the signal to indicate that sensor data is available, for embodiments that implement the signal. The transition may support rapid processing of the sensor data (e.g. filtering) for example, or may be used if a rapid wakeup of the SOC 10 is desired (which may be managed by software executing on the processor 40). For example, a button or other user interface device that indicates a user's desire to interact with the device may be an event that would cause rapid wakeup of the SOC 10. If the processor 40 is power gated in the wait state 60, the transition from the wait state 60 to the process state 64 may include powering up the processor 40, and resetting and initializing the processor 40. In other embodiments, the transition from the wait state 60 may pass through the capture state 62, but not remain in the capture state 62. This implementation may reduce complexity with a slightly longer wakeup time for the processor 40.

In the capture state 62, the SCM 44 may be active and may be sampling data from one or more of the sensors 20. The SCM 44 may write the captured sensor data to memory 42 (SCM data 52). The SCM 44 may also write additional data to the memory 42 (SCM data 52), such as a timestamp associated with the captured sensor data, a sensor identifier, etc. Any desired additional data may be stored in the memory 42. In one embodiment, the timestamp may be the time at which the sensor data was sensed by the sensor 20, which may be before the data is captured by the SCM 44. Alternatively, the timestamp may be the time of the sensor data capture by the SCM 44.

The SCM 44 may detect one or more thresholds at which the SCM 44 may be configured to wake the processor 40 to process the data. The thresholds may include, e.g., a relative fullness of the SCM data 52 in the memory 42, a number of sensor samples taken, an elapsed time since the first sample, a wakeup timer that is not triggered by samples, an error detection, etc. Any set of one or more thresholds may be used, and different thresholds may be used for different sensors. If the threshold is reached, the state machine may transition from the capture state 62 to the process state 64. Alternatively, if the sensor data capture is complete, the state machine may transition from the capture state 62 to the wait state 60.

In the process state 64, the processor 40 may be active and executing code from the memory 42 (or out of the processor 40's cache, if any). The code may include, e.g., filter code. During the process state 64, the SCM 44 may be periodically active to capture additional sensor data, or may be active continuously in the process state 64. The code executing on the processor 40 may determine that it has completed, at least temporarily, and may cause a transition back to the capture state 62. Alternatively, the transition may be directly to the wait state 60 (e.g. if the SCM 44 is inactive).

The code may also determine that communication with the memory 12 is desired in the process state 64. For example, communication with memory 12 may be used to

13

write captured sensor data from the memory 42 to the memory 12, to make use of the larger available storage space in the memory 12. In some embodiments, the memory 12 may also store additional code executable by the processor 40 (e.g. additional filtering algorithms) that may not be continuously stored in the memory 42. The additional code may be executed by the processor 40 after communication with the memory 12 is established. For example, the additional code may be fetched from the memory 12 into the memory 42 and/or may be cached by the processor 40. The data may be written from the memory 42 to the memory 12 responsive to the processor 40 detecting a desired pattern or other aspect in the captured sensor data, and additional processing by the CPU processors 30 in the CPU complex 14 may be warranted. The data may be written to the memory 12 so that the CPU processors 30 have access to it. If communication with the memory 12 is desired, the state machine may transition to the memory access state 66. The transition may include operation by the SOC reconfiguration circuit 46 to program the state of the memory controller 22 as well as a communication path from the always-on component 16 to the memory controller 22. In some embodiments, the entire communication fabric 27 may be activated. In other embodiments, only the portion of the communication fabric 27 that is involved in communication between the memory controller 22 and the always-on component 16 may be activated. The memory 12 may also be brought out of self refresh. In an embodiment, the local PMGR 48 may also be involved in the transition, requesting power up of the memory controller 22 if the memory controller supply voltage is managed by the PMU 156.

In the memory access state 66, the memory controller 22 may be active and the always-on component 16 may have access to the memory 12. The always-on component 16 (and more particularly the processor 40, in an embodiment) may be configured to generate read and write operations to the memory 12, which may be carried over the interconnect 50 and the communication fabric 27 to the memory controller 22. Data may be returned by the memory controller 22 (for reads) or received by the memory controller 22 (for writes) in a similar fashion.

The processor 40 may determine that the need to access the memory 12 has ended, and may cause a transition back to the process state 64. The transition may include returning the memory 12 to self refresh mode and powering down the memory controller 22 and the communication fabric 27.

The processor 40 may also determine that the SOC 10 is to be awakened (e.g. to handoff processing to the CPU complex 14). The state machine may transition from the memory access state 66 to the SOC on state 68. The transition may include the local PMGR 48 requesting power up for the SOC 10 from the PMU 156 and may include the SOC reconfiguration circuit 46 programming various components from the configuration data 56. In one embodiment, a transition directly from the process state 64 to the SOC on state 68 may be supported. In such a transition, power up of the memory controller 22 and removal of the memory 12 from self refresh may be performed as well. Alternatively, the processor 40 may detect a desire to transition to the SOC on state 68 but may pass through the memory access state 66 to perform the transition.

From the SOC on state 68, the SOC 10 (e.g. the PMGR 32 and/or the software executing on the CPU processors 30) may determine that the SOC 10 is to transition to a lower power state. In one embodiment, the software may perform a "suspend to RAM" operation in which various system state, including the state also represented by the configura-

14

tion data 56, is written to the memory 12 before the memory 12 is placed in self refresh and the SOC 10 components are powered down. Thus, upon return to the SOC on state 68, the reprogramming of state from the configuration data 56 may be performed and then the software may resume execution based on the data stored in the memory 12. The transition may be relatively quick, e.g. as compared to if the always-on component 16 were not included. In such a case, software may begin the normal cold boot process. At some point in the process, the software may recognize that the suspend to RAM had occurred, but some unnecessary initialization processing may have already been performed at that point in the process.

Generally, operations performed in lower power states may also be performed while the state machine is any of the higher power states as well. For example, sensor data capture may also be performed while the state machine is in the process state 64, the memory access state 66, and the SOC on state 68 (e.g. if one of the triggers that causes the SCM 44 to capture data occurs while the state machine is any of the other states). Similarly, the processor 40 may be active in any of the process state 64, the memory access state 66, and the SOC on state 68 and thus may process data in any of these states.

If the SOC 10 shuts down, the state machine may return from the SOC on state 68 to the memory access state 66 (and may transition to lower states based on other activity in the always-on component 16). Alternatively, a transition from the SOC on state 68 directly to any of the states 60, 62, 64, or 66 may be performed based on the current activity in the always-on component 16 at the time the transition occurs.

Turning now to FIG. 4, a block diagram of another state machine is shown. The state machine in FIG. 4 may be implemented in concert with the state machine of FIG. 3. In the illustrated embodiment, the state machine includes an off state 70, on SOC On state 72, an AO+memory state 74, an AO state 76, and a No AO state 78. AO in this context may be an acronym for always-on.

The off state 70 may be the state in which all power to the SOC 10 is off, such as when the device including the SOC 10 is completely off. Accordingly, the state machine may transition from the off state 70 (e.g. to the SOC On state 72) in response to the power being turned on to the SOC 10. A reset of the SOC 10 may be performed, and then the SOC 10 may proceed to boot. The state machine may transition from the SOC On state 72 to the off state 70 in response to powering off the SOC 10 completely. The power off may occur after software executing on the CPUs 30 has saved any desired state from memory 12 to non-volatile memory, closed down various connections that the device may have (e.g. wireless and/or wired network connections, wireless phone connections, etc.), and otherwise have prepared the device for an orderly shutdown. While the transition is from the SOC On state 72 to the off state 70 in FIG. 4, transitions from the other states to the off state 70 may be supported in other embodiments.

In the SOC On state 72, the SOC 10 may be in full operation. Various components of the SOC 10 may be powered on or powered off as desired, but the SOC 10 as a whole may generally be viewed as active in the SOC On state 72. The SOC On state 72 may correspond to the SOC On state 68 in the embodiment of FIG. 3.

In the SOC On state 72, the software executing on the CPU complex 14 may determine that the SOC 10 should go to a low power state (e.g. sleep). In an embodiment, the software may perform a "suspend to RAM" operation, in which various SOC state is written to the memory 12 prior

15

to powering down the SOC 10. The memory 12 may be placed in a “self refresh” mode in which it maintains the memory contents but is not active on the memory interface to the memory controller 22. The PMGR 32 may communicate power down commands to the PMU 156 to cause the power down of the components in the SOC 10 other than the memory controller 22, the fabric 27 (or portion thereof that is used to communicate between the memory controller 22), and the always-on component 16. Alternatively, the local PMGR 48 may transmit the power down commands. The state machine may transition to the AO+memory state 74. In some embodiments, a transition from the SOC On state 72 to the AO state 76 may be supported as well. Alternatively, the transition from the SOC On state 72 to the AO state 76 may pass through the AO+memory state 74. That is, if the target state is the AO state 76, the transition to the AO+memory state 74 may be made, followed by the transition to the AO state 76.

In the AO+memory state 74, the memory controller 22, the communication fabric 27 (or the portion to the always-on component 16) and the always on component 16 may be active. The AO+memory state 74 may correspond to the memory access state 66 in FIG. 3. If an event that causes the SOC to wake up is detected, the state machine may transition to the SOC On state 72 (powering up the other components of the SOC 10 via communication with the PMU 156 and/or power switches in the SOC 10 and reconfiguring the components via the SOC reconfiguration circuit 46 and/or from data in the memory 12, in various embodiments).

On the other hand, the always-on component 16 may determine that memory access is completed and may deactivate the memory controller 22 (after placing the memory 12 in a retention mode such as self-refresh). The memory controller 22 may be powered down and the always-on component 16 may remain powered. The state machine may transition to the AO state 76. The AO state 76 may correspond to any of the process state 64, the capture state 62, and the wait state 60 in FIG. 3. If the always-on component 16 determines that memory access is desirable again (e.g. due to reaching various thresholds in the SCM data 52 or detecting patterns/attributes via the processor 40), the state machine may transition to AO+memory state 76 (powering the memory controller 22 and the communication fabric 27 and reconfiguring the same via the SOC reconfiguration circuit 46). In some embodiments, a direct transition from the AO state 76 to the SOC On state 72 may be supported, including powering up the memory controller 22, the communication fabric 27, and other components of the SOC 10 and reconfiguring those components via the SOC reconfiguration circuit 46.

In one embodiment, the No AO state 78 may be supported. The No AO state 78 may be a state in which the always-on component 16 is powered down but the memory 12 remains powered in retention mode. The No AO state 78 may be similar to a “classic” suspend to RAM state. Returning from the No AO state 78 to the SOC On state 72 may include software reconfiguring the components of the SOC 10, including the always-on component 16. The software may execute on the CPU processors 30. Thus, the transition from the no AO state 78 to the SOC On state 72 may include basic boot operations until software has initialized the SOC 10 and has detected that memory 12 is storing state already.

Turning next to FIG. 5, a flowchart is shown illustrating operation of one embodiment of software code that may be executed on the SOC 10 (e.g. by the CPU processors 30). The code may be executed at boot of a device that includes

16

the SOC 10. The code may similarly be executed during a change in programmable configuration of a component. The code executing during a configuration change may or may not be the same code that is executed during boot, in various embodiments. In other embodiments, portions of the operation shown in FIG. 5 may be implemented in hardware. The code may include instructions which, when executed on a processor, implement the operation illustrated in FIG. 5. In an embodiment, the code implementing the operation shown in FIG. 5 may be part of the driver code for a corresponding component, and thus the operation illustrated in FIG. 5 may be implemented in multiple code sequences.

The code may determine the configuration parameters to be programmed into the component (block 80). The parameters may be based on discovering the component and its capabilities. While components in the SOC 10 may be fixed because they are implemented in hardware, the code may be general purpose to run on multiple versions of the SOC 10. Furthermore, the SOC 10 may be included in multiple, differently-designed devices. The desired parameters may be affected by the particular device in which the SOC 10 is instantiated.

The code may write the configuration parameters to the component (block 82), programming the component. If the configuration parameters include data that is to be restored upon repowering the SOC 10 after a sleep state or other power down state (decision block 84, “yes” leg), the code may write the configuration parameters to the programmable configuration data 56, thus shadowing the state in the SOC reconfiguration circuit 46 (block 86). In other embodiments, the SOC reconfiguration circuit 46 may be configured to automatically shadow the desired state.

It is noted that, in some embodiments, not all of the configuration parameters need be part of the reconfiguration state that is restored to the component on a subsequent power up of the SOC 10. For example, parameters that set various optional features which are not required for basic communication with the component may be set to default values on reconfiguration. Such optional parameters may be read from the suspend to RAM state in the memory 12 after restarting execution on the CPUs 30 for restore to the component. Accordingly, such parameters need not be part of the state stored by the SOC reconfiguration circuit 46. Furthermore, as mentioned previously, in some embodiments the parameters written to the SOC reconfiguration circuit 46 may differ from those programmed into the component at the time the SOC 10 is powered down. In such a case, the parameters written to the SOC reconfiguration circuit 46 may be those that are to be reprogrammed into the component in response to a wake-up of the SOC 10.

Turning next to FIG. 6, a flowchart is shown illustrating operation of one embodiment of the always-on component 16 in response to a determination in the always-on component 16 that one or more components of the SOC 10 are to be powered up again. For example, the operation of FIG. 6 may be part of the transition to the memory access state 66/AO+memory state 74, to restore the memory controller 22 and the communication fabric 27. The operation of FIG. 6 may be part of the transition to the SOC On state 68/SOC On state 72, to restore components throughout the SOC 10. The always-on component 16 may be configured to implement the operation shown in FIG. 6.

The always-on component 16 may be configured to cause a restore of the power of the components being powered up (block 90). For example, the local PMGR 48 may be configured to request that the PMU 156 restore supply voltage to one or more supply voltage rails of the SOC 10.

17

Alternatively, the local PMGR **48** or other circuitry in the always-on component **16** may be configured to control power switches in the SOC **10** to restore power to power gated components. A combination of PMU requests and power switch controls may be used as well.

Once power has stabilized and any component reset has been completed, the SOC reconfiguration circuit **46** may be configured to program the components with the programmable configuration data **56** that corresponds to the component (block **92**). The SOC reconfiguration circuit **46** may be configured to read the programmable configuration data **56** and transmit the data to the component, until the reconfiguration is complete (decision block **94**). Once the reconfiguration has completed (decision block **94**, “yes” leg), the transition to the new state (e.g. the memory access state **66** or the SOC On state **68**) may be completed (block **96**).

The transmission may take any form (e.g. programmed input/output (PIO) writes, dedicated communication paths, memory-mapped I/O writes, etc.). In addition to the writes of configuration parameters, some embodiments may support other information in the programmable reconfiguration data **56** to determine status from a component, which may form part of the determination of whether or not reconfiguration is complete (decision block **94**). For example, a series of configuration parameter writes may be transmitted to a component, followed by a polling read to a register that the component updates to indicate completion or readiness to operate, for example.

FIG. **7** is a block diagram illustrating the components of the SOC **10** and which components are on or off in one embodiment of the SOC **10** for memory access state **66**/AO+ memory state **74**. The crosshatched components in FIG. **7** are powered off, while the non-crosshatched components are powered on. Also illustrated in FIG. **7** are various pads **98A-98D**. The pads may include input/output driver/receiver circuitry configured to drive signals on pins of the SOC **10** and receive signals from the pins. Accordingly, the pads **98A-98D** may receive supply voltages as well. In this embodiment, the pads **98C** for the memory controller **22** to communicate with the memory **12** may be powered on, as may the pads **98B** from the always-on component **16** to various sensors. Pads **98D** for the PMGR **32** to communicate to the PMU **156**, and the pads **98A** for the peripheral **18B**, may both be powered down. Alternatively, a single pad structure may be used in which all pads are powered on whenever at least one pad is powered on.

As illustrated in FIG. **7**, the memory controller **22** and the always-on component **16** may be powered up while the remaining components are powered down. Additionally, a portion **99** of the communication fabric **27** that is used to communicate between the always-on component **16** and the memory controller **22** may be powered up while the remainder of the communication fabric **27** may be powered down. For example, in an embodiment, the communication fabric **27** may include a hierarchical set of buses and circuitry to route transactions from sources such as the peripherals **18A-18B**, the CPU complex **14**, and the always-on component **16** to the memory controller **22**. The fabric may also carry data (to the memory controller **22** for writes, from the memory controller **22** for reads) and responses from the memory controller **22** to the sources. The portions of the hierarchical interface and circuitry between the always-on component **16** and the memory controller **22** may be powered on and other portions may be powered off.

FIG. **8** is a block diagram illustrating latency reduction using the reconfiguration mechanism, for one embodiment. Time increases from top to bottom in FIG. **8**, as illustrated

18

by the arrow on the left hand side of FIG. **8**. To the left is a boot sequence for the integrated circuit **10**, and to the right is a reconfiguration according to the reconfiguration mechanism of the present implementation.

The boot sequence may be performed when a device including the SOC **10** is powered up initially. Accordingly, there is no data stored in the memory **12** and the SOC **10** is not initialized, including the programmable reconfiguration data **56**. The boot sequence includes a read-only memory (ROM) load **100**, a low level boot **102**, and a kernel **104**. The ROM load **100** may begin at the exit of reset by the CPU processors **30** and may include reading low level boot code for the low level boot **102** from a ROM (e.g. a secure ROM), decrypting and/or authenticating the low level boot code, and starting the low level boot code. The low level boot code may discover the various components of the SOC **10** and may initialize the components. Generally, the amount of initialization, the components to be initialized, and the state to which the components are initialized by the low level boot code may be controlled according to the design of the kernel code (kernel block **104**). That is, the low level boot code may generate a state in the system/SOC **10** that is expected to be in place when the kernel code executes its first instruction. The kernel code may be the central core of the operating system, managing the SOC **10**'s resources for use by various application programs executing in the system.

When powering up again using the reconfiguration mechanism, the ROM load **100** may be avoided. The reconfiguration mechanism (block **106**) may have the same effect as the low level boot **102**, but may in some cases be more rapid than the low level boot code. At worst, the reconfiguration mechanism **106** may have the same latency as the low level boot **102**. At the conclusion of the reconfiguration mechanism **106**, the kernel **104** may be ready to execute. The latency reduction using the reconfiguration mechanism is indicated by the arrow **108**.

In another embodiment, the reconfiguration mechanism **106** may be implemented by deriving reconfiguration code from the low level boot code and storing the code in a location accessible by the CPU processors **30** after the power up event (e.g. in a non-volatile memory such as Flash memory in the SOC **10** or coupled thereto). After powering up and resetting the CPU processors **30**, the CPU processors **30** may be released from reset to a reset vector that points the location so that the reconfiguration code may be executed. The reconfiguration code may terminate with a call to the kernel.

FIG. **9** is a block diagram illustrating the use of speculation to reduce wakeup latency, for one embodiment. Generally, speculation such as that shown in FIG. **9** may be used at any level (e.g. any transition between states in FIGS. **3** and **4**) to reduce latency. While some power may be consumed in powering up circuitry speculatively and powering it back down if the speculation is incorrect, a reasonably accurate speculation may be a good power/performance tradeoff. Similar to FIG. **8**, time increases from top to bottom in FIG. **9**.

On the left in FIG. **9** is a sequence performed without speculation. The always-on component **16** may collect *N* sensor samples (block **110**). That is, the always-on component **16** may transition *N* times between the wait state **60** and the capture state **62**, capturing sensor data each time (where *N* is a positive integer). The always-on component **16** may be programmed with a threshold of *N* in this example, so that after the *N* sensor samples, the state machine transitions to the process state **64** (waking the processor **40**). The processor **40** may process the sensor data (block **112**), but not

19

detect a pattern or other attribute of the sensor data that causes the processor **40** to wake the memory controller **22** or other parts of the SOC **10**. The state machine may return to the capture state **62** and/or the wait state **60**. Subsequently, *N* more sensor samples may be collected (block **114**), and the processor **40** may again be awakened and may process the sensor data (block **116**). In this case, the processor **40** may detect that the SOC **10** is to be awakened so that the CPU processors **30** may further process the sensor data or perform other processing. Thus, the state machine may transition to the SOC On state **68/72**, awakening the SOC **10** and permitting the processing (block **118**).

On the right in FIG. **9** is an example of speculation to reduce the latency for turning on the SOC **10**. Similar to the example on the left, the example on the right may include the always-on component **16** collecting *N* sensor samples and waking the processor **40** (block **120**), transitioning the state machine to the process state **64**. In this case, however, the code executed by the processor **40** not only searches for patterns/attributes in the sensor data that indicate the desire for immediate SOC processing (e.g. similar to blocks **112** and **116** on the left side of FIG. **9**), but also searches for patterns/attributes to predict that SOC processing will be desired soon. In the example on the right, the code executed by the processor **40** may predict that the SOC processing in desired (block **122**), and may cause the state machines to transition to the SOC On state **68/72** (block **124**). The SCM **44** may continue to capture sensor samples in parallel as well. When the pattern/attribute is detected that would cause the wakeup, the SOC **10** may already be ready. Latency may be reduced as compared to the example on the left, illustrated by the arrow **126**. If the prediction is incorrect (mispredict in FIG. **9**, the SOC **10** may return to sleep (block **128**). In this case, the power used to wake up the SOC **10** may have been wasted.

Turning next to FIG. **10**, a block diagram of one embodiment of a system **150** is shown. In the illustrated embodiment, the system **150** includes at least one instance of the SOC **10** coupled to one or more peripherals **154** and the external memory **12**. The PMU **156** is provided which supplies the supply voltages to the SOC **10** as well as one or more supply voltages to the memory **12** and/or the peripherals **154**. In some embodiments, more than one instance of the SOC **10** may be included (and more than one memory **12** may be included as well).

The peripherals **154** may include any desired circuitry, depending on the type of system **150**. For example, in one embodiment, the system **150** may be a mobile device (e.g. personal digital assistant (PDA), smart phone, etc.) and the peripherals **154** may include devices for various types of wireless communication, such as wifi, Bluetooth, cellular, global positioning system, etc. The peripherals **154** may also include additional storage, including RAM storage, solid state storage, or disk storage. The peripherals **154** may include user interface devices such as a display screen, including touch display screens or multitouch display screens, keyboard or other input devices, microphones, speakers, etc. In the embodiment of FIG. **1**, the peripherals **154** may include the sensors **20**. In other embodiments, the system **150** may be any type of computing system (e.g. desktop personal computer, laptop, workstation, net top etc.).

The external memory **12** may include any type of memory. For example, the external memory **12** may be SRAM, dynamic RAM (DRAM) such as synchronous DRAM (SDRAM), double data rate (DDR, DDR2, DDR3, etc.) SDRAM, RAMBUS DRAM, low power versions of

20

the DDR DRAM (e.g. LPDDR, mDDR, etc.), etc. The external memory **12** may include one or more memory modules to which the memory devices are mounted, such as single inline memory modules (SIMMs), dual inline memory modules (DIMMs), etc. Alternatively, the external memory **12** may include one or more memory devices that are mounted on the SOC **10** in a chip-on-chip or package-on-package implementation.

FIG. **11** is a block diagram of one embodiment of a computer accessible storage medium **200** is shown. Generally speaking, a computer accessible storage medium may include any storage media accessible by a computer during use to provide instructions and/or data to the computer. For example, a computer accessible storage medium may include storage media such as magnetic or optical media, e.g., disk (fixed or removable), tape, CD-ROM, DVD-ROM, CD-R, CD-RW, DVD-R, DVD-RW, or Blu-Ray. Storage media may further include volatile or non-volatile memory media such as RAM (e.g. synchronous dynamic RAM (SDRAM), Rambus DRAM (RDRAM), static RAM (SRAM), etc.), ROM, or Flash memory. The storage media may be physically included within the computer to which the storage media provides instructions/data. Alternatively, the storage media may be connected to the computer. For example, the storage media may be connected to the computer over a network or wireless link, such as network attached storage. The storage media may be connected through a peripheral interface such as the Universal Serial Bus (USB). Generally, the computer accessible storage medium **200** may store data in a non-transitory manner, where non-transitory in this context may refer to not transmitting the instructions/data on a signal. For example, non-transitory storage may be volatile (and may lose the stored instructions/data in response to a power down) or non-volatile.

The computer accessible storage medium **200** in FIG. **11** may store always-on component code **202**. The always-on component code **202** may include instructions which, when executed by the processor **40**, implement the operation described for the code above. The always-on component code **202** may include the processor code **54** shown in FIG. **2**, for example. The computer accessible storage medium **200** in FIG. **11** may further include CPU code **204**. The CPU code **204** may include ROM load code **206**, low level boot code **208**, and/or kernel code **210**. Each code may include the instructions which, when executed, implement the operations assigned to the ROM load block **100**, the low-level boot block **102**, and the kernel block **104**, for example. A carrier medium may include computer accessible storage media as well as transmission media such as wired or wireless transmission.

Numerous variations and modifications will become apparent to those skilled in the art once the above disclosure is fully appreciated. It is intended that the following claims be interpreted to embrace all such variations and modifications.

What is claimed is:

1. An integrated circuit comprising:
 - at least one processor forming a central processing unit (CPU) in the integrated circuit; and
 - a plurality of components coupled to the CPU, wherein the plurality of components includes a first component that is configured to remain powered while the CPU and remaining ones of the plurality of components are powered off, and wherein the first component is configured to:

21

cause the CPU and the remaining ones of the plurality of components to power up;
 program at least a portion of the remaining ones of the plurality of components and the CPU with configuration data stored in the first component responsive to powering up the CPU and the remaining ones of the plurality of components, wherein a configuration of the CPU and the remaining ones of the plurality of components when programmed with the configuration data is the configuration of the CPU and the remaining ones of the plurality of components that is in place when the CPU executes an initial instruction of kernel code because the configuration data is stored to the first component by boot code executed during an initial power up of the integrated circuit; release the CPU from reset to execute the kernel code wherein:
 releasing the CPU includes bypassing an execution of read-only memory (ROM) load code and the boot code;
 the ROM load code and the boot code is not executed between a determination that the CPU and the remaining ones of the plurality of components are to be powered up and the release of the CPU to execute the kernel code because the configuration of the CPU and the remaining ones of the plurality of components at a time that the CPU is released from reset is the configuration of the CPU and the remaining ones of the plurality of components that is in place when the CPU executes the initial instruction of the kernel code and the CPU begins kernel code execution in response to being released from reset; and
 the kernel code is a core of an operating system and manages resources in a system that includes the integrated circuit for use by application programs executed by the CPU.

2. The integrated circuit as recited in claim 1, wherein the plurality of components comprise a memory controller coupled to a memory during use, and wherein the CPU is configured to store configuration data corresponding to the plurality of components in the memory prior to the plurality of components and the CPU powering down.

3. The integrated circuit as recited in claim 2, wherein the configuration data stored in the first component matches at least a portion of the configuration data stored in the memory.

4. The integrated circuit as recited in claim 1, wherein the first component comprises a second processor configured to determine that the CPU and the plurality of components are to be powered up.

5. The integrated circuit as recited in claim 4, wherein the second processor is configured to determine that the CPU and the plurality of components are to be powered up responsive to executing code stored in the first component.

6. The integrated circuit as recited in claim 5, wherein the code, when executed on the second processor, filters data retrieved by the first component from one or more sensors coupled to the integrated circuit during use.

7. The integrated circuit as recited in claim 6, wherein the data includes a plurality of samples, wherein each of the plurality of samples is collected at a different point in time from each other one of the plurality of samples.

8. The integrated circuit as recited in claim 5, wherein the second processor is configured to predict that the CPU and the plurality of components are to be powered up, and wherein the CPU executing the kernel code is configured to

22

verify the prediction and continue processing or power back down based on a result of verifying the prediction.

9. A system comprising:

at least one sensor; and

a system on a chip (SOC) integrated onto an integrated circuit and coupled to the at least one sensor, the SOC comprising:

at least one processor forming a central processing unit (CPU) in the integrated circuit; and

a plurality of components coupled to the CPU, wherein the plurality of components includes a first component that is configured to remain powered while the CPU and remaining ones of the plurality of components are powered off, and wherein the first component is configured to:

cause the CPU and the remaining ones of the plurality of components to power up;

program at least a portion of the remaining ones of the plurality of components and the CPU with configuration data stored in the first component responsive to powering up the CPU and the remaining ones of the plurality of components, wherein a configuration of the CPU and the remaining ones of the plurality of components when programmed with the configuration data is the configuration of the CPU and the remaining ones of the plurality of components that is in place when the CPU executes an initial instruction of kernel code because the configuration data is stored to the first component by boot code executed during an initial power up of the integrated circuit;

release the CPU from reset to execute the kernel code wherein:

releasing the CPU includes bypassing an execution of read-only memory (ROM) load code and the boot code;

the ROM load code and the boot code is not executed between a determination that the CPU and the remaining ones of the plurality of components are to be powered up and the release of the CPU to execute the kernel code because the configuration of the CPU and the remaining ones of the plurality of components at a time that the CPU is released from reset is the configuration of the CPU and the remaining ones of the plurality of components that is in place when the CPU executes the initial instruction of the kernel code and the CPU begins kernel code execution in response to being released from reset; and

the kernel code is a core of an operating system and manages resources in the system for use by application programs executed by the CPU.

10. The system as recited in claim 9, wherein the plurality of components comprise a memory controller coupled to a memory during use, and wherein the CPU is configured to store configuration data corresponding to the plurality of components in the memory prior to the plurality of components and the CPU powering down.

11. The system as recited in claim 10, wherein the configuration data stored in the first component matches at least a portion of the configuration stored in the memory.

12. The system as recited in claim 9, wherein the first component comprises a second processor configured to determine that the CPU and the plurality of components are to be powered up.

23

13. The system as recited in claim 12, wherein the second processor is configured to determine that the CPU and the plurality of components are to be powered up responsive to executing code stored in the first component.

14. The system as recited in claim 13, wherein the code, when executed on the second processor, filters data retrieved by the first component from one or more sensors coupled to the integrated circuit during use.

15. The system as recited in claim 14, wherein the data includes a plurality of samples, wherein each of the plurality of samples is collected at a different point in time from each other one of the plurality of samples.

16. The system as recited in claim 13, wherein the second processor is configured to predict that the CPU and the plurality of components are to be powered up, and wherein the CPU executing the kernel code is configured to verify the prediction and continue processing or power back down based on a result of verifying the prediction.

17. In a system on a chip (SOC) that includes at least one processor forming a central processing unit (CPU) in the SOC and further including a plurality of components, wherein the plurality of components include a first component that remains powered during use when remaining ones of the plurality of components and the CPU are powered down, a method comprising:

causing, by the first component, the CPU and the remaining ones of the plurality of components to power up; programming, by the first component, at least a portion of the remaining ones of the plurality of components and the CPU with configuration data stored in the first component responsive to powering up the CPU and the remaining ones of the plurality of components, wherein a configuration of the CPU and the remaining ones of the plurality of components when programmed with the configuration data is the configuration of the CPU and the remaining ones of the plurality of components that is in place when the CPU executes an initial instruction of kernel code because the configuration data is stored to the first component by boot code executed during an initial power up of SOC; and

24

releasing the CPU from reset to execute the kernel code wherein:

releasing the CPU includes bypassing an execution of read-only memory (ROM) load code and boot code, the ROM load code and the boot code is not executed between a determination that the CPU and the remaining ones of the plurality of components are to be powered up and the release of the CPU to execute the kernel code because the configuration of the CPU and the remaining ones of the plurality of components at a time that the CPU is released from reset is the configuration of the CPU and the remaining ones of the plurality of components that is in place when the CPU executes the initial instruction of the kernel code and the CPU begins kernel code execution in response to being released from reset, and

the kernel code is a core of an operating system and manages resources in a system that includes the SOC for use by application programs executed by the CPU.

18. The method as recited in claim 17, wherein the plurality of components comprise a memory controller coupled to a memory during use, and wherein the CPU is configured to store configuration data corresponding to the plurality of components in the memory prior to the plurality of components and the CPU powering down, and wherein the configuration data stored in the first component matches at least a portion of the configuration data stored in the memory.

19. The method as recited in claim 17, wherein the first component comprises a second processor, and wherein the method further comprises determining, by the second processor responsive to executing code stored in the first component, that the CPU and the plurality of components are to be powered up.

20. The method as recited in claim 19, further comprising filtering, by the processor responsive to executing the code, data retrieved by the first component from one or more sensors coupled to the SOC during use.

* * * * *