
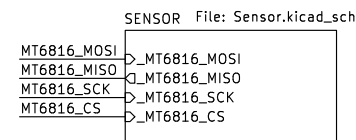
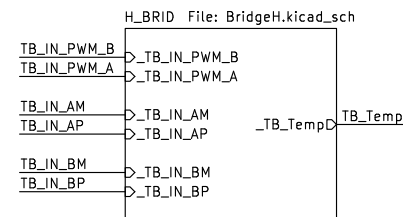




Consult the crystal oscillator data sheet to determine the matching capacitance value. The signal amplitude of the matched capacitance value is typically 100mV-200mV, 12pF-20pF

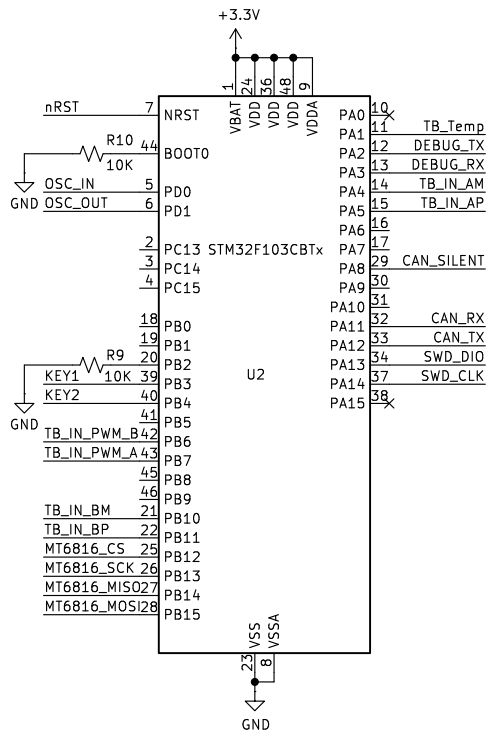

Motor35 Driver
Ver 1.0 Designed by
Zhbi98

Motor35 Driver

Sheet: /
File: Motor35.kicad_sch







Title:

Size: A4
KiCad E.D.A. 9.0.6





Date:

Rev:

Id: 1/5

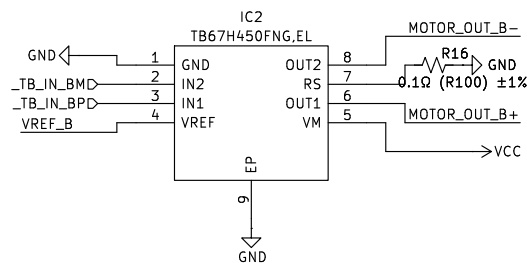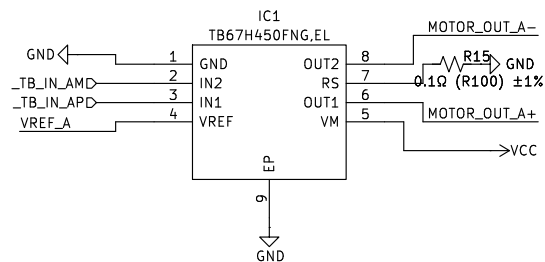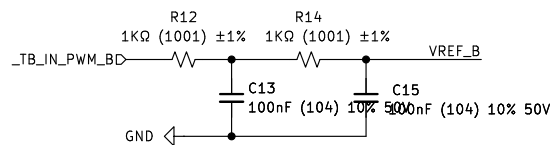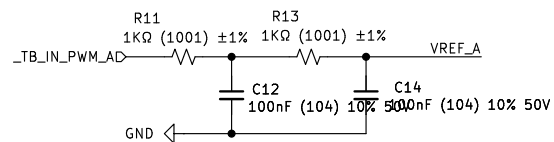

Motor35 Driver Ver 1.0 Designed by Zhb98			Motor35 Driver
Sheet: /H_BRID/ File: BridgeH.kicad_sch			
Title:			
Size: A4	Date:	Rev:	
KiCad E.D.A. 9.0.6			Id: 2/5

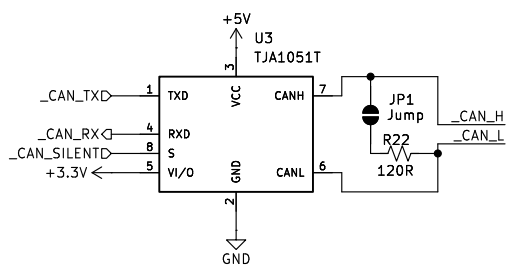

Motor35 Driver
Ver 1.0 Designed by ***Motor35 Driver***
Zhbi98

Sheet: /PORT/
File: Port.kicad_sch

Title:


Size: A4

Date:

KiCad E.D.A. 9.0.6

Rev:

Id: 3/5




Motor35 Driver

Title:

Date:

Rev:	
------	--

Id: 4/5

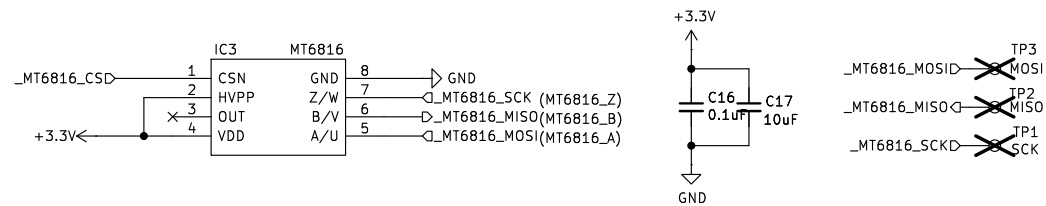

Motor35 Driver Ver 1.0 Designed by Zhbi98		<i>Motor35 Driver</i>
Sheet: /SENSOR/ File: Sensor.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 9.0.6		Id: 5/5