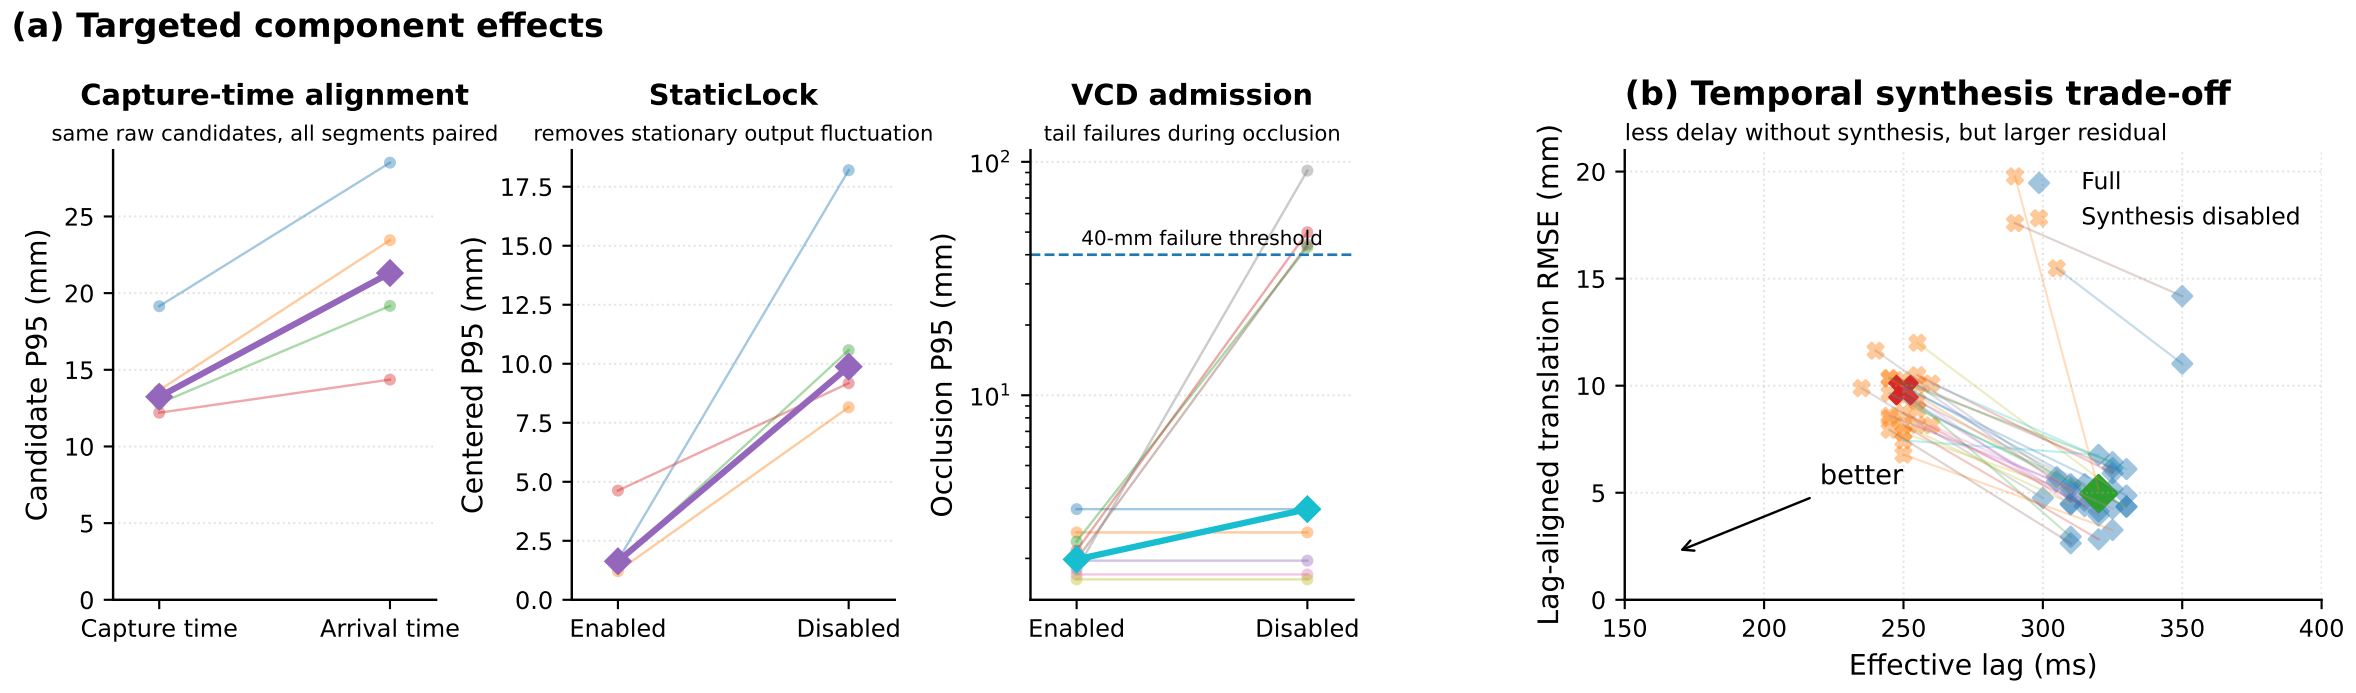
(a) Targeted component effects
Capture-time alignment
same raw candidates, all segments paired
Candidate P95 (mm)
0
5
10
15
20
25
Capture time
Arrival time
StaticLock
removes stationary output fluctuation
Centered P95 (mm)
0.0
2.5
5.0
7.5
10.0
12.5
15.0
17.5
Enabled
Disabled
VCD admission
tail failures during occlusion
Occlusion P95 (mm)
10^2
10^1
40-mm failure threshold
Enabled
Disabled
(b) Temporal synthesis trade-off
less delay without synthesis, but larger residual
Lag-aligned translation RMSE (mm)
0
5
10
15
20
Full
Synthesis disabled
better
150
200
250
300
350
400
Effective lag (ms)