



REV.	DESCRIPTION	DATE	NAME
A0	初版发行	19. 07. 16	yangyan


Top View

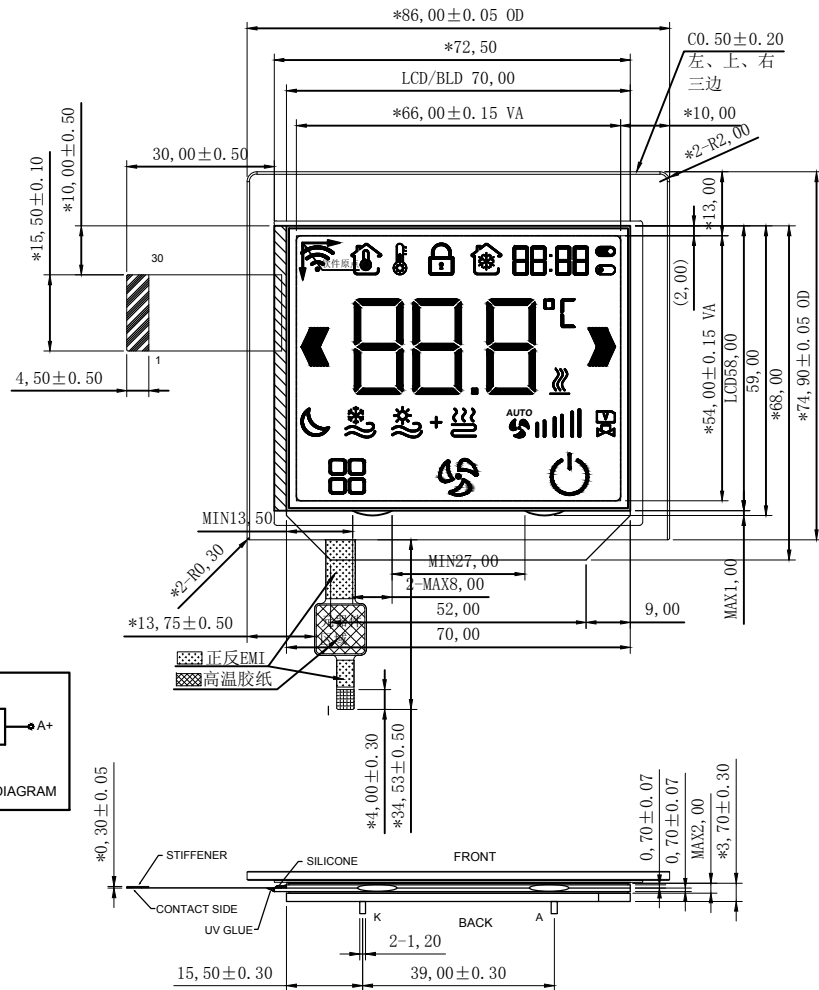

Side View

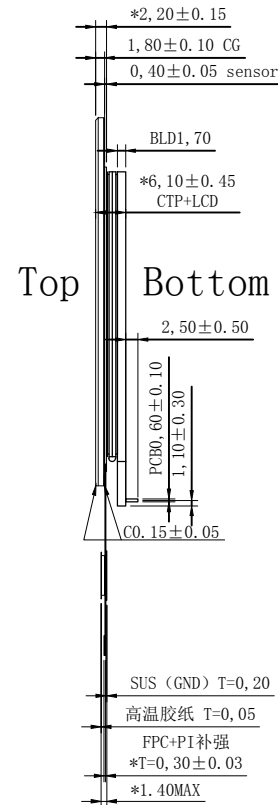

Bottom View

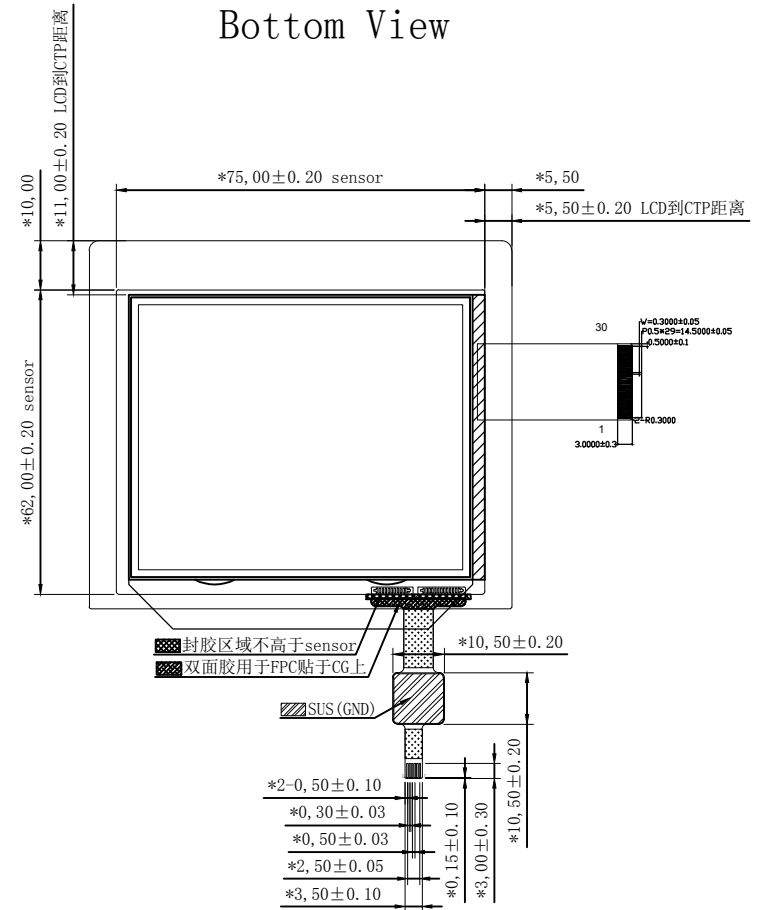

SPECIFICATION:			
Display Type	VA	Backlight	White Color : Uniformity:70%(MIN)
	Negative		Luminance: 600cd/m2(MIN)
Drive Method	Transmissive		IF:30mA,VF:6.0±0.2V
	1/4Duty		X:0.25~0.31;Y:0.25~0.31
	1/3Bias		
Viewing Direction	12:00 O'clock		
Vop	3.3V		
Vdd	/		
Drive IC	/		

PN	1-2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
COM1	NC	COM1						125	126	119	115	83	84	111	74	DP	6A
COM2		COM2					83	84	124	120	116	82	85	75	77	6B	6F
COM3			COM3				82				81	81	76	76	77	6C	6E
COM4				COM4			51	56	122	121	114	113	112	72	70	6C	6D

PN	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33-34
COM1		SA	110	44	19	SA	COL	24	TA	1A	74					
COM2	6B	6F	48	4F	38	3F	28	2F	19	1F	15				COM2	NC
COM3	3C	4C	4C	4C	3C	3C	2C	2C	1C	1D	17	COM4				
COM4	3C	4C	4C	4C	3C	3C	2C	2C	1C	1D	17	COM4				

备注:

1. 未注公差:  $\pm 0.20$ ;
2. 所有材料必须符合RoHS2.0与无卤素标准.

特殊工艺:

PIN#	Assignment
1	
3	
4	
5	
6	


Property	Requirement
IC	ILI2117A
Surface Hardness	480(750g)
Light Transmission	>80%
Operating Temperature	-20~70°C
Storage Temperature	-30~80°C
Operating Humidity	45~85 RH
Storage Humidity	45~90 RH

GFF

COVER GLASS
TOP OCA
TOP SITO FILM
BOT OCA
BOT SITO FILM



JIANGXI HOLITECH TECHNOLOGY CO.,LTD.

ALL UNITS: mm	DATE	MODEL NUMBER :	
DWN: yangyan	19. 07. 16	CXX0000-3.4 工程图	
CHK:hujianping	19. 07. 16	CUSTOMER NO. : 曼瑞德	
APP: wujujie	19. 07. 16	DO NOT SCALE THIS DRAWING	
			PROJECTION

