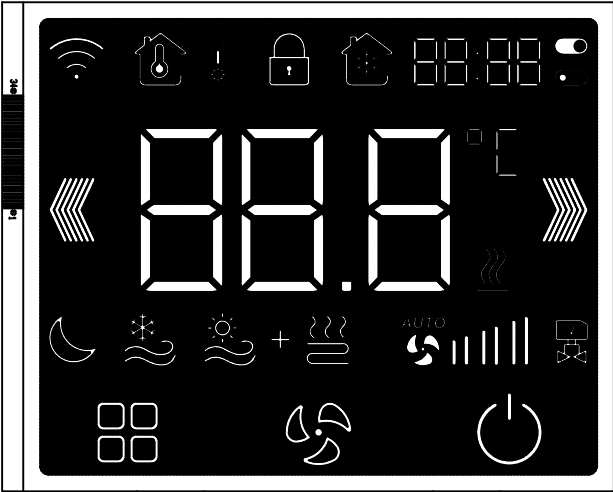
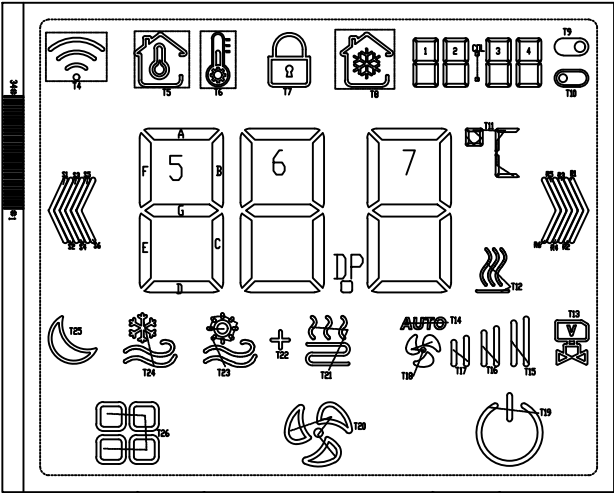


Signature:

Date:

REV.	DESCRIPTION	REVISER	DATE
A0	New Drawing	kuangshenggen	2018/04/11





LCD全显效果图

PIN	1-2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
COM1	NC	COM1	---	---	---	---	T25	T26	T19	T15	R3	R4	T11	7A	DP	6A
COM2		---	COM2	---	---	S3	S4	T24	T20	T16	R2	R5	7B	7F	6B	6F
COM3		---	---	COM3	---	S2	S5	T23	T18	T17	R1	R6	7G	7E	6G	6E
COM4		---	---	---	COM4	S1	S6	T22	T21	T14	T13	T12	7C	7D	6C	6D

PIN	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33-34
COM1	---	5A	T10	4A	T9	3A	COL	2A	T8	1A	T4	---	---	---	COM1	NC
COM2	5B	5F	4B	4F	3B	3F	2B	2F	1B	1F	T5	---	---	COM2	---	
COM3	5G	5E	4G	4E	3G	3E	2G	2E	1G	1E	T6	---	COM3	---	---	
COM4	5C	5D	4C	4D	3C	3D	2C	2D	1C	1D	T7	COM4	---	---	---	

SPECIFICATION:			
Display Type	VA	Backlight	White Color; Uniformity:70%(MIN)
	Negative		Luminance : 600cd/m2(MIN)
	Transmissive		IF:30mA,VF:6.0±0.2V
Drive Method	1/4Duty	Customer' NO.	X:0.25~0.31;Y:0.25~0.31
	1/3Bias		/
Viewing Direction	12:00 O'clock	Top	-20°C~+70°C
Vop	3.3V	Tst	-30°C~+80°C
Vdd	/	With""	Important Dimension
Drive IC	/	With"()"	Reference Dimension
Environmental protection requirements: RoHS 2.0 <input checked="" type="checkbox"/> REACH <input checked="" type="checkbox"/> Halogen-free <input type="checkbox"/>			

				JIANGXI HOLITECH TECHNOLOGY CO., LTD				
Unspecified Tolerance:	±0.2	UNITS: mm	DATE:	PART NUMBER :  PN003		SHEET:	2 of 8	
DESIGN BY:	kuangshenggen	2019/07/04						
CHECKED BY:	xiaolongxiang	2019/07/04						
APPROVED BY:	lizhong	2019/07/04	DO NOT SCALE THIS DRAWING.			PROJECTION	DRAWING DESCRIPTION:	MODEL