

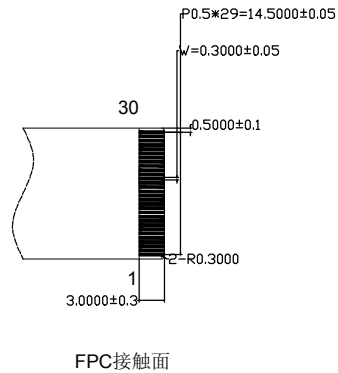
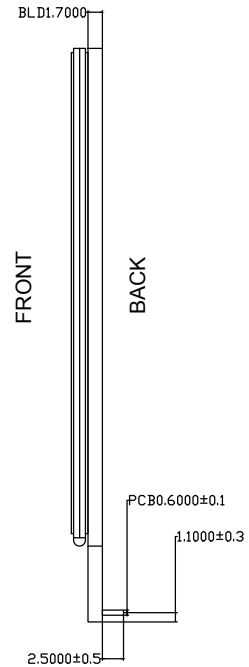


Signature: Date:

REV.	DESCRIPTION	REVISER	DATE
A0	New Drawing	kuangshenggen	2018/04/11

↓
VIEWING DIRECTION

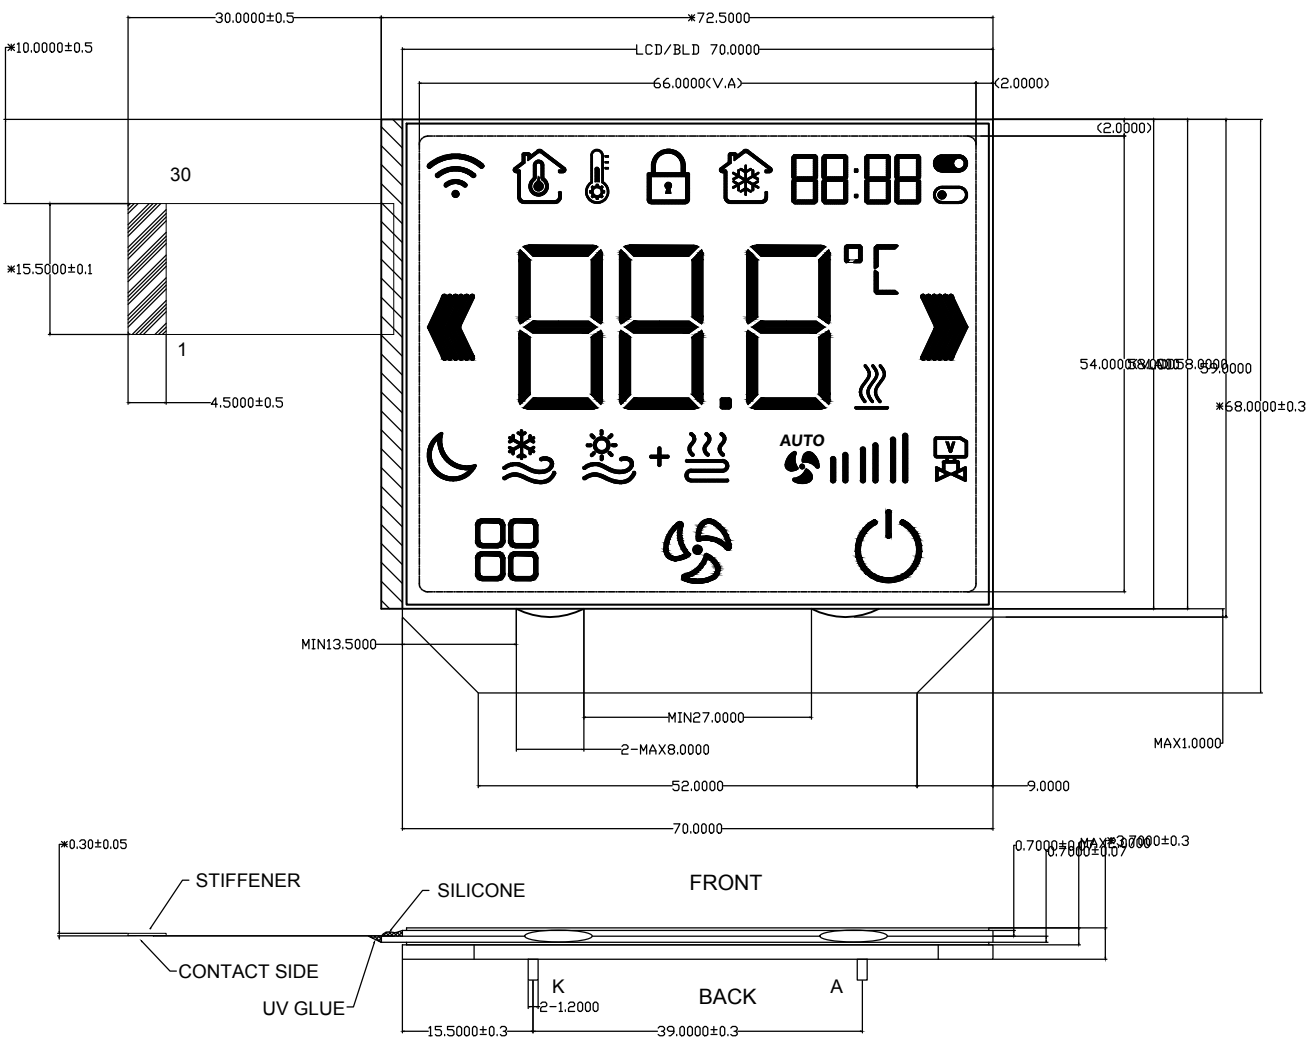

SPECIFICATION:

Display Type	VA	Backlight	White Color; Uniformity:70%(MIN)
	Negative		Luminance : 600cd/m2(MIN)
Drive Method	Transmissive	Customer' NO.	IF:30mA,VF:6.0±0.2V
	1/4Duty		X:0.25~0.31;Y:0.25~0.31
Viewing Direction	12:00 O'clock	Top	-20°C~+70°C
Vop	3.3V	Tst	-30°C~+80°C
Vdd	/	With***	Important Dimension
Drive IC	/	With"()"	Reference Dimension
Environmental protection requirements: RoHS 2.0 <input checked="" type="checkbox"/> REACH <input checked="" type="checkbox"/> Halogen-free <input type="checkbox"/>			



JIANGXI HOLITECH TECHNOLOGY CO., LTD

Unspecified Tolerance:	±0.2	UNITS: mm	DATE:	PART NUMBER :		SHEET:	11 of 8
DESIGN BY:	kuangshenggen	2019/07/04	CHECKED BY:	xiaolongxiang		DRAWING DESCRIPTION:	MODEL
APPROVED BY:	lizhong	2019/07/04	DO NOT SCALE THIS DRAWING.		PROJECTION		