



Signature:

Date:

| REV. | DESCRIPTION | REVISER       | DATE       |
|------|-------------|---------------|------------|
| A0   | New Drawing | kuangshenggen | 2018/04/11 |

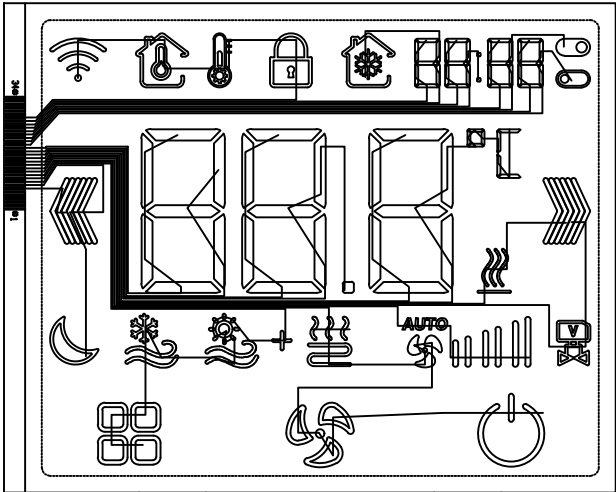

SEG

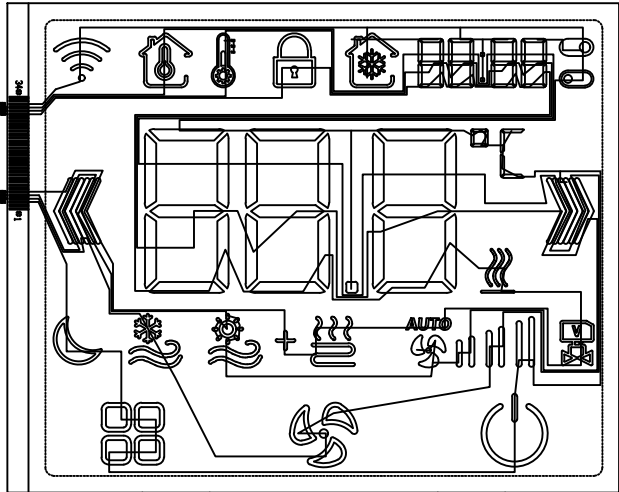

COM

SPECIFICATION:

|                                                                                                                                                                     |                       |               |                                  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|---------------|----------------------------------|
| Display Type                                                                                                                                                        | VA                    | Backlight     | White Color; Uniformity:70%(MIN) |
|                                                                                                                                                                     | Negative Transmissive |               | Luminance : 600cd/m2(MIN)        |
| Drive Method                                                                                                                                                        | 1/4Duty               | Customer' NO. | IF:30mA,VF:6.0±0.2V              |
|                                                                                                                                                                     | 1/3Bias               |               | X:0.25~0.31;Y:0.25~0.31          |
| Viewing Direction                                                                                                                                                   | 12:00 O'clock         | Top           | -20°C~+70°C                      |
| Vop                                                                                                                                                                 | 3.3V                  | Tst           | -30°C~+80°C                      |
| Vdd                                                                                                                                                                 | /                     | With""        | Important Dimension              |
| Drive IC                                                                                                                                                            | /                     | With"()"      | Reference Dimension              |
| Environmental protection requirements: RoHS 2.0 <input checked="" type="checkbox"/> REACH <input checked="" type="checkbox"/> Halogen-free <input type="checkbox"/> |                       |               |                                  |



JIANGXI HOLITECH TECHNOLOGY CO., LTD

|                        |               |            |                            |                            |            |                      |          |
|------------------------|---------------|------------|----------------------------|----------------------------|------------|----------------------|----------|
| Unspecified Tolerance: | ±0.2          | UNITS: mm  | DATE:                      | PART NUMBER :<br><br>PN003 |            | SHEET:               | 13 of 18 |
| DESIGN BY:             | kuangshenggen | 2019/07/04 | CHECKED BY:                | xiaolongxiang              | 2019/07/04 | DRAWING DESCRIPTION: | MODEL    |
| APPROVED BY:           | lizhong       | 2019/07/04 | DO NOT SCALE THIS DRAWING. |                            | PROJECTION |                      |          |