FNO$^{\angle\theta}$: Extended Fourier neural operator for learning state and optimal control of distributed parameter systems

Zhexian Li, Ketan Savla

***Abstract*—**

I. INTRODUCTION

Distributed parameter systems, such as systems governed by partial differential equations, are of great importance in various scientific and engineering fields, including fluid dynamics, climate modeling, and control of physical processes. The domain of such systems typically involves both temporal and spatial dimensions, making prediction and control tasks significantly harder than finite-dimensional systems. On one hand, the state space of distributed parameter systems is infinite-dimensional, for which optimal control methods have been developed [1], [2], but often requiring significant computational resources even for small-scale systems. On the other hand, discretizing the spatial domain, also known as spatially lumping the system, leads to finite-dimensional approximation, for which a rich set of tools and methods have been developed for optimal control [3]. However, the tradeoff between accuracy and discretization size needs to be carefully investigated to balance the computational efficiency and approximation error for the lumped system.

Recently, there has been a surge of interest in using neural operators to learn solution operators for PDEs, due to the potential in learning fast and accurate surrogate infinite-dimensional models. Neural operators are mappings between function spaces represented in the form of neural networks [4], e.g., from coefficient functions or boundary conditions to PDE solutions. Every layer in the neural network consists of an integral operator that varies between different types of neural operators. Among all different neural operators, the Fourier neural operator (FNO) [5] uses a convolution operator represented in the Fourier space. This simple architecture has been found to provide the smallest approximation errors for solutions of various PDEs [6] and to successfully reproduce complicated physical phenomena such as turbulent flows [5]. In addition to solving PDEs, neural operators have also been used to assist control design for PDEs such as boundary control with backstepping methods []

The key motivation of using the convolution operator in FNO is the fact that every linear PDE in $\mathbb{R}^n$ with constant coefficients has an elementary solution in convolution form, following the fundamental solution independently established by Ehrenpreis [7] and Malgrange [8]. However, solutions in bounded domains with non-periodic boundary conditions are not in convolution form. The limitation of the convolution operator becomes apparent when implemented as a Fourier series, which is inherently periodic. Nevertheless, this limitation can be mitigated in practice using additional parameters in neural operators [5] or Fourier continuation methods [9].

Although the convolution form is limited to systems without boundaries, additional structures for solution representations have been established for convex (potentially bounded) domains. Specifically, the Ehrenpreis-Palamodov fundamental principle [10], [11] states that any solution to linear PDEs in a convex subset of $\mathbb{R}^n$ with constant coefficients can be represented as an integral of exponential functions multiplied by polynomials over structured subsets of $\mathbb{C}^n$. The proof of this result is nonconstructive and explicit expressions for such an integral representation are only available for one or two-dimensional space using the Fokas method [12]–[14]. Despite the abstract nature of the representation, the exponential term in the integral representation of the fundamental principle is in the same form of the inverse Fourier transform, whereas the former integral is over complex domains. Since the FNO represent the convolution operator in the Fourier space as the inverse Fourier transform, a natural step to use the fundamental principle in neural operator is to extend the frequency variable in FNO convolution operator to the complex domain and learn the phase of the complex variable as an additional parameter in the neural operator architecture.

In this paper, we first show that in addition to solutions, linear quadratic optimal control for linear PDEs with constant coefficients can also be represented in a similar integral form as the fundamental principle. Then, we propose an extended FNO architecture, called FNO$^{\angle\theta}$, by introducing a new parameter θ as the phase of the complex variable in the convolution operator of FNO, following the complex integral representation of state and optimal control. ...

We conclude this section by introducing key notations used in the paper. We use $\mathbb{R}, \mathbb{R}_+, \mathbb{C}, \mathbb{Z}, \mathbb{N}$ to denote the sets of real numbers, positive real numbers, complex numbers, integers, and natural numbers, respectively. We use $\mathrm{C}^\infty(\Omega)$ and $\mathrm{L}^2(\Omega)$ to denote the set of infinitely differentiable functions and square-integrable functions defined on Ω, respectively. The convolution operator is denoted by $*$. The composition of two operators $\mathcal{A}$ and $\mathcal{B}$ is denoted by $\mathcal{A} \circ \mathcal{B}$.

Z. Li is with the Sonny Astani Department of Civil and Environmental Engineering, University of Southern California, Los Angeles, CA 90089, USA. zhexianl@usc.edu

K. Savla is with the Sonny Astani Department of Civil and Environmental Engineering, the Daniel Epstein Department of Industrial and Systems Engineering, and the Ming Hsieh Department of Electrical and Computer Engineering University of Southern California, Los Angeles, CA 90089, USA. ksavla@usc.edu

K. Savla has a financial interest with Xtelligence.Inc.

II. PROBLEM FORMULATION

Let P denote a matrix with entries $P_{j,k}, 1 \leq j \leq p, 1 \leq l \leq q$. Each entry $P_{j,l}$ is a polynomial function in $\mathbb{C}^n$. Let $D_j = -\mathbf{i}\partial/\partial_{\xi_j}, j = 1, \ldots, n$, and $D = (D_1, \ldots, D_n)$. Then, $P(D)$ is a matrix of linear partial differential operators with constant coefficients. Following this notation, we consider the system of inhomogeneous PDEs in a convex and open domain $\Omega \subseteq \mathbb{R}^n$, of the form,

$$P(D)\phi = u, \tag{1}$$

or, more explicitly,

$$\sum_{l=1}^{q} P_{j,l}(-\mathbf{i}\partial/\partial_{\xi_1}, \ldots, -\mathbf{i}\partial/\partial_{\xi_n})\phi_l = u_j, \quad j = 1, \ldots, p, \tag{2}$$

where ϕ is the state and u is the control input. In this paper, we focus on smooth functions u_j and ϕ_l in $\mathrm{L}^2(\Omega) \cap \mathrm{C}^\infty(\Omega), j = 1, \ldots, p$ and $l = 1, \ldots, q$. Note that the system (1) has solutions in more general spaces, such as the space of distributions [15].

Remark 1: In practice, the domain Ω can either denote a spatial domain or a product of a spatial domain and a time interval, i.e., $\Omega = \Omega_x \times \Omega_t$ where $\Omega_x \subseteq \mathbb{R}^{n-1}$ and $\Omega_t \subseteq \mathbb{R}_+$. For brevity, we use a single variable ξ to denote a point in Ω and do not distinguish between spatial and temporal components.

Remark 2: Appropriate boundary conditions are needed to ensure the uniqueness of the solution to the system (1). We focus on general solutions to (1) first and postpone the discussion of boundary conditions to numerical experiments.

Example 1: Throughout the paper, we will use the following one-dimensional heat equation as a running example to illustrate the main results.

$$\frac{\partial \phi(x,t)}{\partial t} = \frac{\partial^2 \phi(x,t)}{\partial x^2} + u(x,t). \tag{3}$$

In this example, P is a single polynomial and $P(\xi) = \mathbf{i}\xi_1 + \xi_2^2$.

The optimal control problem under consideration is to find a control input u that minimizes a cost functional $J(\phi, u)$ of the following form subject to the system (1),

$$J(\phi, u) = \int_\Omega |\phi(\xi) - \phi_d(\xi)|^2 + \lambda |u(\xi)|^2 d\xi, \tag{4}$$

where ϕ_d is a given desired state and $\lambda > 0$ is a regularization parameter. When $\phi_d = 0$, this problem is a special case of the classical linear quadratic regulator (LQR) problem for PDEs [16]. For $\Omega = \Omega_x \times \Omega_t$, where $\Omega_x = \mathbb{R}^{n-1}$ and $\Omega_t = \mathbb{R}_+$, explicit expressions for optimal control have been derived in [17]. The one-dimensional case where Ω_x is a finite interval has been studied in [18]. However, explicit expressions for optimal control in a general (potentially bounded) domain Ω are not readily available. This is relevant for many practical applications where the spatial domain is typically bounded.

In this paper, we propose to develop a neural operator for learning explicit expressions for optimal control. The key to our approach is to leverage an integral representation of optimal control in designing neural operator architecture. The integral representation is derived in the following section.

III. INTEGRAL REPRESENTATION FOR OPTIMAL CONTROL

To derive an integral representation for optimal control, we first present the first-order optimality conditions that are satisfied by any optimal control to (4) subject to (1). Then, we leverage the first-order optimality conditions and the Ehrenpreis fundamental principle [10], [15] to show that any optimal control can be represented as an integral in $\mathbb{C}^n$.

For the LQR problem under consideration, the first-order optimality conditions can be expressed as a system of coupled PDEs using the adjoint approach. The following result follows by specializing [2, Section 1.6.3] to the LQR problem.

Lemma 1: Let u^* be an optimal control for (4) subject to (1) and ϕ^* be the corresponding optimal state. Then, there exists an adjoint state ψ^* such that the following system of equations is satisfied,

$$\begin{cases} P(D)\phi^* = u^*, \\ P(D)^\dagger \psi^* = -(\phi^* - \phi_d), \\ u^* = \frac{1}{\lambda}\psi^*, \end{cases} \tag{5}$$

where $P(D)^\dagger$ denotes the adjoint of $P(D)$.

Substituting the last equation for u^* into the first equation in (5), we observe that optimal control u^* and state ϕ^* can be represented as a solution to the following system of PDEs,

$$\begin{bmatrix} P(D) & -I \\ I & \lambda P(D)^\dagger \end{bmatrix} \begin{bmatrix} \phi^* \\ u^* \end{bmatrix} = \begin{bmatrix} 0 \\ \phi_d \end{bmatrix}. \tag{6}$$

Note that (6) is a system of linear PDEs with constant coefficients and can be written in a similar form as (1).

In the following, we first present the existence of a solution to (1) in convolution form. Then, we combine this convolution solution with the Ehrenpreis-Palamodov fundamental principle [10], [11] to derive an integral representation for optimal control.

Lemma 2 (Theorem 2.11 in [19]): For $\Omega = \mathbb{R}^n$, there exists a distribution $\tilde{E}$ such that $P(D)\tilde{E} = \delta$, where δ is the Dirac delta function. Moreover, the convolution of $\tilde{E}$ with the control input u, i.e., $\tilde{\phi} = \tilde{E} * u$, is a solution to (1).

Remark 3: The classical FNO is inspired by the existence of a solution $\tilde{\phi}$ in convolution form. The key ingredient in FNO is to learn the convolution operator in the Fourier space, which is equivalent to learning a multiplication parameter.

The existence of $\tilde{\phi}$ does not necessarily imply that every solution to (1) can be represented in convolution form. On the other hand, the Ehrenpreis-Palamodov fundamental principle states that any solution to (1) with $u = 0$ can be represented as an integral of exponential functions multiplied by polynomials over the complex domain.

Lemma 3 ([10], [11], [20]): Let $\bar{\phi}$ denote a solution to the system (1) with $u = 0$. Then, there exists zero sets of polynomials $\bar{\mathcal{V}}_j \subset \mathbb{C}^n, j = 1, \ldots, s$, polynomials $\bar{Q}_{j,l}, j = 1, \ldots, s, l = 1, \ldots, m_j$, and measures $d\bar{\mu}_{j,l}$ whose support

lies in $\bar{\mathcal{V}}_j$, such that $\bar{\phi}$ can be represented as an integral of the following form,

$$\bar{\phi} = \sum_{j=1}^{s} \sum_{l=1}^{m_j} \int_{\bar{\mathcal{V}}_j} e^{\mathbf{i}k\cdot\xi} \bar{Q}_{j,l}(\xi, k) d\bar{\mu}_{j,l}(k). \tag{7}$$

Moreover, the function $e^{\mathbf{i}k\cdot\xi}\bar{Q}_{j,l}(\xi,k)$ satisfies the system of PDEs in (1) for each $k \in \bar{\mathcal{V}}_j$.

Applying Lemmas 2–3 to the coupled state-control system (6), we obtain the following result.

Theorem 1: Let u^* denote an optimal control to (4) subject to (1) and ϕ^* denote the corresponding optimal state. Then, there exists a distribution E, zero sets of polynomials $\mathcal{V}_j \subset \mathbb{C}^n, j = 1, \ldots, s$, functions $Q_{j,l}, j = 1, \ldots, s, l = 1, \ldots, m_j$, and measures $d\mu_{j,l}$ whose support lies in $\mathcal{V}_j$, such that u^* and ϕ^* can be represented in the following form,

$$\begin{bmatrix} \phi^* \\ u^* \end{bmatrix} = E * \begin{bmatrix} 0 \\ \phi_d \end{bmatrix} + \sum_{j=1}^{s} \sum_{l=1}^{m_j} \int_{\mathcal{V}_j} e^{\mathbf{i}k\cdot\xi} Q_{j,l}(\xi, k) d\mu_{j,l}(k). \tag{8}$$

Moreover, the function $e^{\mathbf{i}k\cdot\xi}Q_{j,l}(\xi,k)$ satisfies the system of PDEs in (6) for each $k \in \mathcal{V}_j$.

Proof: According to Lemma 2, there exists a distribution E such that

$$\begin{bmatrix} P(D) & -I \\ \lambda I & P(D)^\dagger \end{bmatrix} \left(E * \begin{bmatrix} 0 \\ \phi_d \end{bmatrix} \right) = \begin{bmatrix} 0 \\ \phi_d \end{bmatrix}. \tag{9}$$

Combining (6) and (9), we have

$$\begin{bmatrix} P(D) & -I \\ \lambda I & P(D)^\dagger \end{bmatrix} \left(\begin{bmatrix} \phi^* \\ u^* \end{bmatrix} - E * \begin{bmatrix} 0 \\ \phi_d \end{bmatrix} \right) = 0. \tag{10}$$

Applying Lemma 3 to (10), we obtain the integral representation in (8).

■

Example 2: The integral representation in (8) is quite abstract and non-constructive. We illustrate an example of this representation for the one-dimensional heat equation (3) given the initial condition $\phi(x, 0) = \phi_0(x)$. Let $\phi_d = 0, \lambda = 1$. Following [17, Section V-B], the optimal state and control for the heat equation can be represented as follows,

$$\begin{aligned} \phi^*(x,t) &= \int_{\mathbb{R}} e^{\mathbf{i}k_x x - \omega(k_x)t} \hat{\phi}_0(k_x) \frac{dk_x}{2\pi}, \\ u^*(x,t) &= \int_{\mathbb{R}} e^{\mathbf{i}k_x x - \omega(k_x)t} (k_x^2 - \omega(k_x)) \hat{\phi}_0(k_x) \frac{dk_x}{2\pi}, \end{aligned} \tag{11}$$

where $\omega(k_x) = \sqrt{k_x^4 + 1}$ and $\hat{\phi}_0(k_x)$ is the Fourier transform of the initial condition $\phi_0(x)$. Let $k = \begin{bmatrix} k_x & k_t \end{bmatrix}$. Then, the expression (11) can be represented in the form of (8) by letting $s = 1, m_1 = 1, \mathcal{V}_1 = \{k \in \mathbb{C}^2 : -k_t^2 + k_x^4 + 1 = 0\}$, $Q_{1,1}(x,t,k) = \begin{bmatrix} 1 & k_x^2 + k_t \end{bmatrix}^\top$, $d\mu_{1,1}(k) = \frac{1}{2\pi}\hat{\phi}_0(k_x)dk$ if $k_t \in \mathbb{R}_+, k_x \in \mathbb{R}$ and $d\mu_{1,1}(k) = 0$ otherwise, where dk is the Lebesgue measure in $\mathbb{R}^2$.

For the heat equation over $\mathbb{R}$, it is sufficient to represent optimal control as an integral over $\mathbb{R}$ as in (11). Note that the integrals in (11) can also be deformed to integrals over contours in $\mathbb{C}$. For the heat equation over a finite interval, real domain is not enough and optimal control can be represented as an integral over well-constructed contours in $\mathbb{C}$ in the form (8), see [18].

IV. EXTENDED FOURIER NEURAL OPERATOR

In this section, we first present the architecture of the classical Fourier Neural Operator (FNO). Then, we propose an extended FNO architecture, called FNO$^{\angle\theta}$, that is inspired by the complex integral representation in (8). When the phase θ is zero, FNO$^{\angle\theta}$ reduces to the classical FNO.

A. Classical FNO

Let a, b denote an input and output function in Banach spaces $\mathcal{A}(\Omega; \mathbb{R}^{n_a}), \mathcal{B}(\Omega; \mathbb{R}^{n_b})$, respectively. In this paper, we restrict our attention to the case where $\mathcal{A}$ and $\mathcal{B}$ are subspaces of $\mathrm{L}^2(\Omega) \cap \mathrm{C}^\infty(\Omega)$, respectively. Following [5], [21], we consider a neural operator $\mathcal{N}(a) : \mathcal{A} \to \mathcal{B}$ of the form

$$\mathcal{N}(a) = \mathcal{Q} \circ \mathcal{L}_L \circ \mathcal{L}_{L-1} \circ \cdots \circ \mathcal{L}_1 \circ \mathcal{R}(a), \tag{12}$$

where L is a given length in $\mathbb{N}$, $\mathcal{R} : \mathcal{A}(\Omega; \mathbb{R}^{n_a}) \to \mathcal{B}(\Omega; \mathbb{R}^{n_v})$ is a lifting operator with $n_v \geq n_b$, $\mathcal{Q} : \mathcal{B}(\Omega; \mathbb{R}^{n_v}) \to \mathcal{B}(\Omega; \mathbb{R}^{n_b})$ is a projection operator, and $\mathcal{L}_l : \mathcal{B}(\Omega; \mathbb{R}^{n_v}) \to \mathcal{B}(\Omega; \mathbb{R}^{n_v}), l = 1, \ldots, L$ are nonlinear operator layers. The lifting and projection operators are typically linear transformations implemented using multilayer perceptrons [22], and the nonlinear operator layer is of the form,

$$(\mathcal{L}_l v_l)(\xi) = \sigma\left(W_l v_l(\xi) + (\mathcal{K}_l v_l)(\xi)\right), \tag{13}$$

where $v_l \in \mathcal{B}(\Omega; \mathbb{R}^{n_v})$ is the output from the previous layer, σ is a nonlinear activation function applied component-wise, $W_l \in \mathbb{R}^{n_v \times n_v}$ is a weight matrix, and $\mathcal{K}_l : \mathcal{B}(\Omega; \mathbb{R}^{n_v}) \to \mathcal{B}(\Omega; \mathbb{R}^{n_v})$ is a bounded linear operator.

Different types of neural operators vary by the choice of the linear operator $\mathcal{K}_l$. To learn solution operators of PDEs, the linear operator $\mathcal{K}_l$ in FNO is defined as a convolution operator in the Fourier space motivated by the existence of a solution in convolution form by Lemma 2. Since the convolution operation is transformed to a multiplication in the Fourier space, the operator $\mathcal{K}_l$ in FNO is expressed as follows,

$$(\mathcal{K}_l v_l)(\xi) = \frac{1}{(2\pi)^n} \int_{\mathbb{R}^n} e^{\mathbf{i}k\cdot\xi} \hat{K}_l(k) \hat{v}_l(k) dk, \tag{14}$$

where $\hat{K}_l(k) \in \mathbb{C}^{n_v \times n_v}$ is a matrix indexed by frequency variable k, $\hat{v}_l(k)$ is the Fourier transform of v_l.

Remark 4: In practice, the value of input function a is typically only available at a finite number of discretized spatial locations in Ω. Also, the matrix $\hat{K}_l(k)$ is usually learned for a finite number of frequencies k in the Fourier space. Therefore, FNO is implemented in a discretized manner, where (14) is approximated as a finite sum. We refer readers to [5], [21], [22] for more details on the discretized version of FNO and other practical implementation issues.

In summary, the parameters to be learned in FNO include the weight matrices W_l and the Fourier space parameters $\hat{K}_l(k)$ for all layers $l = 1, \ldots, L$. Despite the motivation from linear PDEs, FNO has been successfully applied to learning solution operators of all different types of nonlinear PDEs, with applications in various fields [5], [21], [22]. This is partially due to the expressiveness of a neural operator architecture in (12), especially when the number of layers L

(length) and the lifted dimension n_v (width) are sufficiently large. In the following, we introduce an extended FNO architecture, called FNO$^{\mathbf{i}\theta}$, which will be shown to be more expressive than the classical FNO when n_v is small in numerical experiments.

B. Extended FNO$^{\angle\theta}$

The key to the design of FNO is the convolution operator $\mathcal{K}_l$ in (14) represented in the Fourier space, inspired by the existence of a solution in convolution form, see Lemma 2. However, not every solution to (1) can be represented in convolution form, which could potentially limit the expressiveness of FNO. In Lemma 3 and Theorem 1, we show that any state and optimal control of (1) can be represented in a form involving a complex integral, see (7)–(8). Comparing (8) to (14), the integrands all contain the leading exponential term $e^{\mathbf{i}k\cdot\xi}$. This motivates us to design an extended FNO architecture, where the linear operator $\mathcal{K}_l$ in (13) is given by

$$(\mathcal{K}_l^\theta v_l)(\xi) = \frac{1}{(2\pi)^n}\int_{\mathbb{R}^n} e^{\mathbf{i}z(k,\theta_l)\cdot\xi}\hat{K}_l(k)\hat{v}_l(k)dk, \quad (15)$$

where $\theta_l = (\theta_{l,1},\dots,\theta_{l,n}), z_j(k,\theta_l) = k_j e^{\mathbf{i}\theta_{l,j}}, j = 1,\dots,n$. In other words, the original frequency variable k is the modulus of the new frequency variable z, and we introduce a new parameter θ_l to be learned as the phase of the complex variable z. When the phase θ_l is zero, $\mathcal{K}_l^\theta$ in (15) reduces to $\mathcal{K}_l$ in (14).

In the following section, we present numerical experiments to show that introducing the new parameter θ greatly improves the expressiveness of the neural operator, especially for a small value of the lifted dimension n_v for which the classical FNO may fail to learn state and optimal control operators for PDEs.

V. Numerical Experiments

In this section, we present numerical results to compare the performance of FNO and FNO$^{\angle\theta}$ in learning state and optimal control for the Burgers' equation. Consider the domain $\Omega = \Omega_x \times \Omega_t$ where $\Omega_x = [0,1]$ and $\Omega_t = [0,0.5]$. The Burgers' equation can be written in the form,

$$\frac{\partial\phi(x,t)}{\partial t} + \phi(x,t)\frac{\partial\phi(x,t)}{\partial x} = \nu\frac{\partial^2\phi(x,t)}{\partial x^2} + u(x,t), \quad (16)$$

where ν is the viscosity coefficient. We choose a small value of $\nu = 0.05$ that generates nonsmooth-like shock wave behavior to increase complexity for training neural operators. We impose the following initial and boundary conditions for (16) to ensure the uniqueness of the solution,

$$\phi(x,0) = \phi_0(x), \quad x \in [0,1]. \quad (17)$$

$$\phi(0,t) = g(t), \phi(1,t) = h(t), \quad t \in [0,0.5], \quad (18)$$

where ϕ_0, g, h are given smooth functions.

The Burgers' equation (16) is a nonlinear PDE that has been widely used as a benchmark problem for testing the performance of neural operators [5], [6]. Note that (16) cannot be written in the form of (1) due to the nonlinearity. Therefore, the integral representation in Theorem 1 does not directly apply to (16). However, the expressiviness of the neural operator architecture in (12) allows us to learn approximated representations for solution and optimal control operators of (16) using FNO or FNO$^{\angle\theta}$.


A. Learning state operator

First, we train neural operators of the form (12) to learn the state operator of the Burgers' equation, which takes the boundary conditions g, h as input a and gives the state ϕ as output b. We follow a supervised learning approach as in [5], where we minimize the mean squared error (MSE) between the predicted state and the true state over a training dataset. To generate the training dataset, we fix the initial condition as $\phi_0(x) = \sin(\pi x)$ and randomly sample the boundary conditions $g(t), h(t)$ from a Gaussian random field [23] with the length scale $\ell = 0.15$ and standard deviation $\sigma = 1$. Then, we solve the Burgers' equation (16) with the sampled boundary conditions using the finite difference method following [5] to obtain the corresponding state $\phi(x,t)$ in Ω, which serves as the ground truth for training. The training dataset consists of 50 state trajectories under different sampled boundary conditions.


For both FNO and FNO$^{\angle\theta}$, we use the Gaussian Error Linear Unit (GELU) activation function for σ and batch normalization following [22]. The number of Fourier layers is set to $L = 4$, according to the recommendation in [22, Section 4.3]. The lifted dimension is set to $n_v = n_a$. The lifted dimension n_v determines the expressive capacity of the neural operator. Increasing the lifted dimension allows the neural operator to represent more complex relations in the data, but comes at the cost of increased computational complexity and memory usage [22]. In our experiments, we set n_v to be the same as the input dimension n_a to stress test the performance of FNO and FNO$^{\angle\theta}$.

To implement the operators (14) and (15), we discretize the Fourier space and learn the parameters $\hat{K}_l(k)$ and $\theta_l(k)$ for a finite number of frequencies $k_m, m = -M, -M+1,\dots,M$. Then, the integrals in (14) and (15) are approximated as sums over the discretized frequencies. To be consistent with [5], we choose the frequency $k_m \in \mathbb{Z}$, which leads to the form of discrete Fourier series. In practice, a large value of M typically introduces more errors during the training [22, Section 4.2], and we set $M = 4$ in our experiments, i.e., $k_m = m, m = -4,-3,\dots,4$.

Figure 1a compares the relative mean squared errors (MSE) during the training phase of FNO and FNO$^{\angle\theta}$ for learning state operator. The values of relative MSE after training are 0.039 and 0.0089 for the classical FNO and the extended FNO$^{\angle\theta}$, respectively, showing an order of magnitude improvement with the phase parameter. To gain further insights on the improvement, Figure 2 shows the absolute error between the outputs from trained neural operators and the training data for a particular boundary condition. It can be seen from Figure 2a that most of the errors for the classical FNO are concentrated on the four boundaries $x = 0, x = 1, t = 0, t = 0.5$. This is because discretizing the Fourier transform (14) with integer frequency k_m results

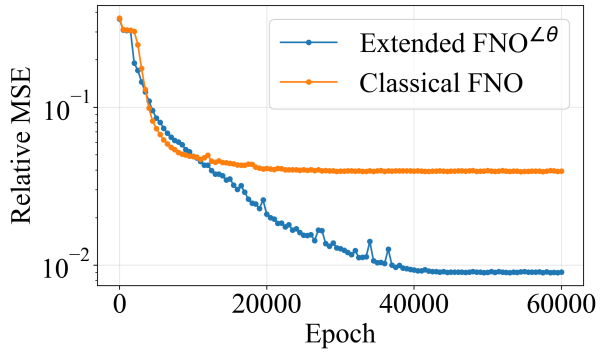

(a) Learning state operator

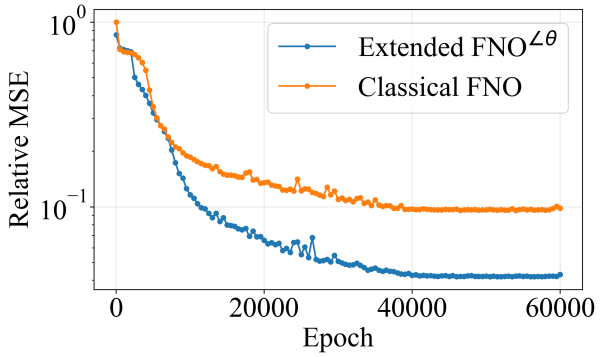

(b) Learning optimal control operator


Fig. 1: Comparison of relative mean squared errors (MSE) over all training data during the training phase of FNO and FNO$^{\angle\theta}$ for the Burgers' equation (16). The extended FNO$\angle\theta$ achieves an order of magnitude improvement in relative MSE for both (a) and (b) over the classical FNO.

in a Fourier series, and the Fourier series generates periodic boundary values that are inconsistent with the input boundary condition. It is possible for the classical FNO to approximate non-periodic boundary conditions using the weight matrix W_l in the operator layer (13) [5]; however, a large value of the lifted dimension n_v is needed to increase the expressivity of the neural operator. In contrast, Figure 2b shows that the extended FNO$^{\angle\theta}$ generates boundary values that are more consistent with the input boundary conditions than the classical FNO. This is because extending the frequency k in (14) to complex variable z in (15) allows representing a richer class of PDE solutions in potentially bounded domains by Lemma 3.

B. Learning optimal control operator

In addition to learning state operator, we also compare the performance of FNO and FNO$^{\angle\theta}$ for learning optimal control operator of the burgers' equation (16). Following the same setting in Section V-A, we generate the training dataset for learning operators that map boundary conditions to optimal control. The boundary conditions are sampled from the same Gaussian random field in Section V-A, and the corresponding optimal control is computed using the adjoint method in [].


Figure 1b compares the relative MSE during the training

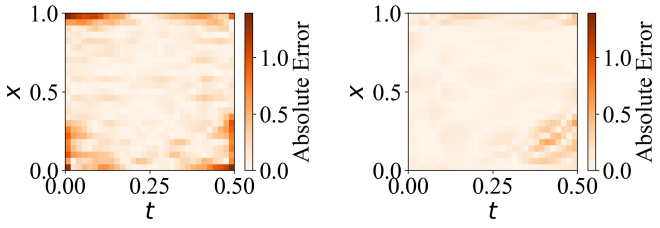

(a) FNO

(b) FNO$^{\angle\theta}$

Fig. 2: Learning state operator: comparison of the absolute error between the neural operator output and the training data for a particular boundary condition.

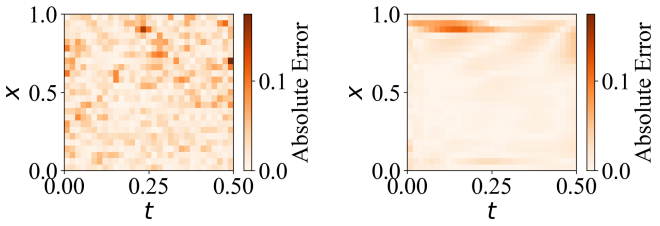

(a) FNO

(b) FNO$^{\angle\theta}$

Fig. 3: Learning optimal control operator: comparison of the absolute error between the neural operator output and the training data for a particular boundary condition.

phase of FNO and FNO$^{\angle\theta}$ for learning optimal control operator. The values of relative MSE after training are 0.098 and 0.042 for the classical FNO and the extended FNO$^{\angle\theta}$, respectively. Figure 3 shows the absolute error between the trained operator output and the training data for a particular boundary condition. As shown in Figure 3a, the errors are scattered across the space-time domain Ω, meaning that the classical FNO is not able to capture the complex relation between the input boundary condition and the corresponding optimal control. For the FNO$^{\angle\theta}$, the absolute error is largely reduced for most part of the domain except for the top area close to the boundary $x = 1$. Further investigation is needed to analyze the cause of concentrated error in this area.

VI. Conclusions and Future Works

A. Conclusions

We analyze the representations for state and optimal control of systems governed by linear partial differential equations with constant coefficients. For this class of distributed parameter systems, we show that state and optimal control can be represented in terms of integrals over the complex domain involving the same exponential term as in the inverse Fourier transform. Therefore, such representations can be regarded as extending the Fourier frequency space from real

to complex domains. We use this insight to redesign the convolution operator in FNO, originally represented using the inverse Fourier transform. We introduce a new complex variable in the inverse transform, where the modulus is the original real frequency, and the phase is a new neural operator parameter to be learned. Numerical experiments for learning state and optimal control operators of the nonlinear burgers' equation illustrate that order of magnitude improvement for the training error can be achieved by introducing the phase parameter. Higher consistency between output boundary values and the given non-periodic boundary conditions is also observed comparing the extended FNO$^{\angle\theta}$ to the classical FNO.

B. Future Works

So far, we have only evaluated the performance of the extended FNO$^{\angle\theta}$ for a single one-dimensional PDE. We plan to test the performance on extensive benchmarks (see for example [6]) for various types of PDEs. Beyond supervised settings, it would also be interesting to investigate unsupervised training schemes since optimal control data are usually not accessible in practice.

REFERENCES

[1] J.-L. Lions, *Optimal Control of Systems Governed by Partial Differential Equations*. Springer Berlin, Heidelberg, 1971.

[2] M. Hinze, R. Pinnau, M. Ulbrich, and S. Ulbrich, *Optimization with PDE constraints*. Springer Science & Business Media, 2008.

[3] A. E. Bryson and Y.-C. Ho, *Applied optimal control: optimization, estimation and control*. Taylor & Francis Group, 1975.

[4] N. Kovachki, Z. Li, B. Liu, K. Azizzadenesheli, K. Bhattacharya, A. Stuart, and A. Anandkumar, "Neural operator: Learning maps between function spaces with applications to pdes," *Journal of Machine Learning Research*, vol. 24, no. 89, pp. 1–97, 2023.

[5] Z. Li, N. Kovachki, K. Azizzadenesheli, B. Liu, K. Bhattacharya, A. Stuart, and A. Anandkumar, "Fourier neural operator for parametric partial differential equations," *arXiv preprint arXiv:2010.08895*, 2020.

[6] M. Takamoto, T. Praditia, R. Leiteritz, D. MacKinlay, F. Alesiani, D. Pflüger, and M. Niepert, "PDEbench: An extensive benchmark for scientific machine learning," *Advances in neural information processing systems*, vol. 35, pp. 1596–1611, 2022.

[7] L. Ehrenpreis, "Solution of some problems of division: Part i. division by a polynomial of derivation," *American Journal of Mathematics*, vol. 76, no. 4, pp. 883–903, 1954.

[8] B. Malgrange, "Existence et approximation des solutions des équations aux dérivées partielles et des équations de convolution," in *Annales de l'institut Fourier*, vol. 6, 1956, pp. 271–355.

[9] A. Ganeshram, H. Maust, V. Duruisseaux, Z. Li, Y. Wang, D. Leibovici, O. Bruno, T. Hou, and A. Anandkumar, "Fc-pino: High precision physics-informed neural operators via fourier continuation," *arXiv preprint arXiv:2211.15960*, 2022.

[10] L. Ehrenpreis, *Fourier analysis in several complex variables*. New York: Wiley-Interscience Publ., 1970.

[11] V. P. Palamodov, *Linear differential operators with constant coefficients*. Springer, 1970, vol. 16.

[12] "A unified transform method for solving linear and certain nonlinear pdes," *Proceedings of the Royal Society of London. Series A: Mathematical, Physical and Engineering Sciences*, vol. 453, no. 1962, pp. 1411–1443, 1997.

[13] A. S. Fokas, *A unified approach to boundary value problems*. SIAM, 2008.

[14] B. Deconinck, T. Trogdon, and V. Vasan, "The method of fokas for solving linear partial differential equations," *SIAM Review*, vol. 56, no. 1, pp. 159–186, 2014.

[15] F. Treves, "Ehrenpreis and the fundamental principle," in *From Fourier Analysis and Number Theory to Radon Transforms and Geometry: In Memory of Leon Ehrenpreis*. Springer, 2012, pp. 491–507.

[16] R. F. Curtain and H. Zwart, *An introduction to infinite-dimensional linear systems theory*. Springer Science & Business Media, 1995.

[17] B. Bamieh, F. Paganini, and M. A. Dahleh, "Distributed control of spatially invariant systems," *IEEE Transactions on Automatic Control*, vol. 47, no. 7, pp. 1091–1107, 2002.

[18] Z. Li, A. S. Fokas, and K. Savla, "A complex spatial frequency approach to optimal control of finite-extent linear evolution systems," *Conditionally accepted by IEEE Transactions on Automatic Control*, 2026.

[19] E. M. Stein and R. Shakarchi, *Functional analysis: introduction to further topics in analysis*. Princeton University Press, 2011, vol. 4.

[20] M. Harkonen, M. Lange-Hegermann, and B. Raita, "Gaussian process priors for systems of linear partial differential equations with constant coefficients," in *International conference on machine learning*. PMLR, 2023, pp. 12 587–12 615.

[21] N. Kovachki, S. Lanthaler, and S. Mishra, "On universal approximation and error bounds for fourier neural operators," *Journal of Machine Learning Research*, vol. 22, no. 290, pp. 1–76, 2021.

[22] V. Duruisseaux, J. Kossaifi, and A. Anandkumar, "Fourier neural operators explained: A practical perspective," *arXiv preprint arXiv:2512.01421*, 2025.

[23] C. E. Rasmussen, *Gaussian Processes in Machine Learning*. Berlin, Heidelberg: Springer Berlin Heidelberg, 2004, pp. 63–71. [Online]. Available: https://doi.org/10.1007/978-3-540-28650-9_4