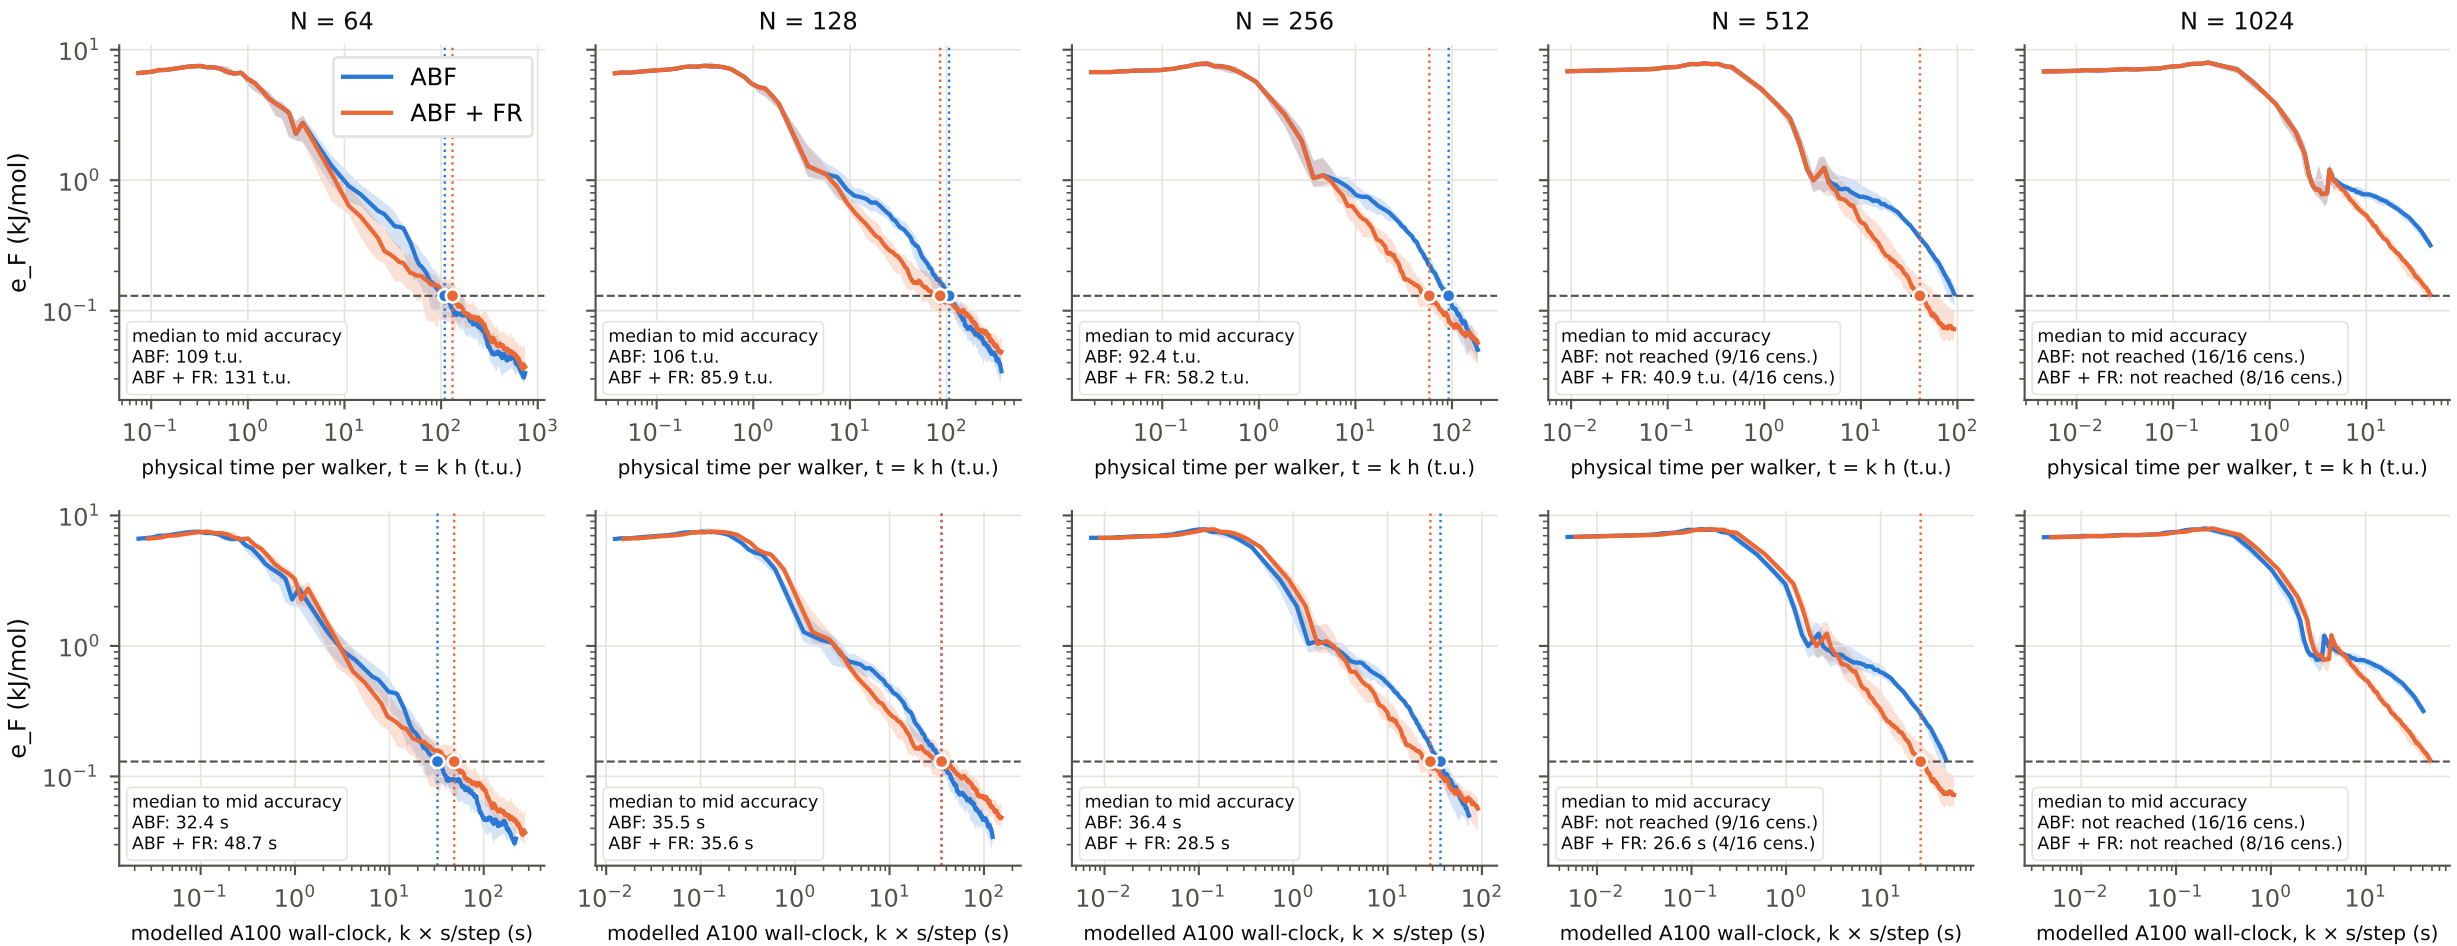

Finite-loading LTA, 150 K, equal number of walkers: e_F vs physical time (top) and modelled A100 wall-clock (bottom)
median and IQR of 16 seeds; dashed: mid accuracy 0.13 kJ/mol; wall-clock = steps × measured s/step of one seed (start-up excluded)
N = 64
N = 128
N = 256
N = 512
N = 1024
ABF
ABF + FR
e_F (kJ/mol)
physical time per walker, t = k h (t.u.)
median to mid accuracy
ABF: 109 t.u.
ABF + FR: 131 t.u.
ABF: 106 t.u.
ABF + FR: 85.9 t.u.
ABF: 92.4 t.u.
ABF + FR: 58.2 t.u.
ABF: not reached (9/16 cens.)
ABF + FR: 40.9 t.u. (4/16 cens.)
ABF: not reached (16/16 cens.)
ABF + FR: not reached (8/16 cens.)
modelled A100 wall-clock, k × s/step (s)
ABF: 32.4 s
ABF + FR: 48.7 s
ABF: 35.5 s
ABF + FR: 35.6 s
ABF: 36.4 s
ABF + FR: 28.5 s
ABF: not reached (9/16 cens.)
ABF + FR: 26.6 s (4/16 cens.)
ABF: not reached (16/16 cens.)
ABF + FR: not reached (8/16 cens.)