


Ethane/LTA 150 K · N = 256 · T_N = 240 t.u.

n_steps = 1,200,000 · h = 0.0002 · B = N n_steps = 3.072e+08 walker-steps · complete seeds: ABF 16/16, ABF+FR 16/16

Mean-force snapshots (bin mean force) vs reference (top) and difference (bottom)

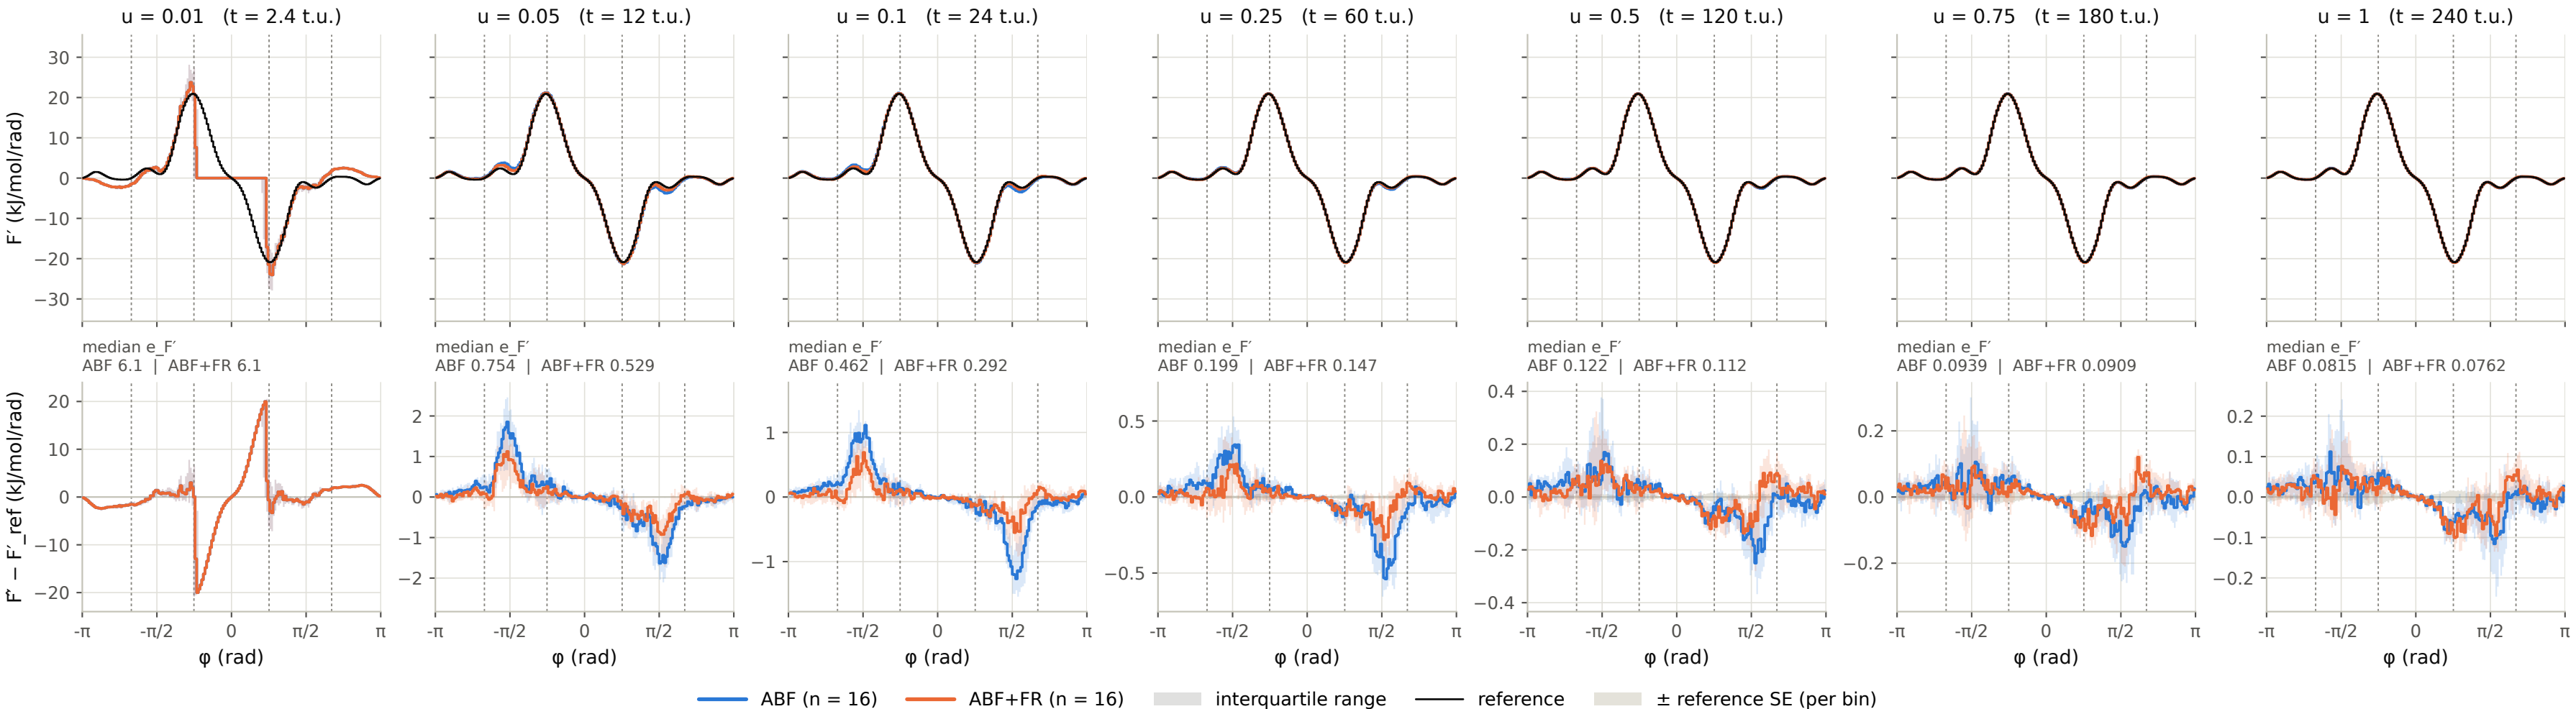

Line = median across seeds; band = interquartile range (25th-75th percentile) across seeds. Metrics are the frozen SCIENTIFIC_PLAN section-4 quantities, unsmoothed.

Raw histogram mean force $\Gamma = M / \max(C, 1)$ (0 in empty bins) vs the MC conditional mean force per bin; bottom: $\Gamma - \Gamma_{\text{ref}}$, whose RMS is $e_{F'}$ (raw).

Dashed guides: $|\phi| = 0.791$ rad (window $|z| < 1.5$ Å) and $|\phi| = 2.109$ rad (cage $|z| > 4$ Å), $z = |\phi| a / 2\pi$, $a = 11.919$ Å. Top-row y range = the reference over the scored window ± 35 % of its span (larger excursions are clipped there and show in the difference row). No smoothing.

eqb_plot_config/2 · config lta_150K_production.json · 2026-10-10 07:15 UTC