


Ethane/LTA 150 K · N = 32 · T_N = 1920 t.u.

n_steps = 9,600,000 · h = 0.0002 · B = N n_steps = 3.072e+08 walker-steps · complete seeds: ABF 16/16, ABF+FR 16/16

Seed-averaged instantaneous CV density vs physical time

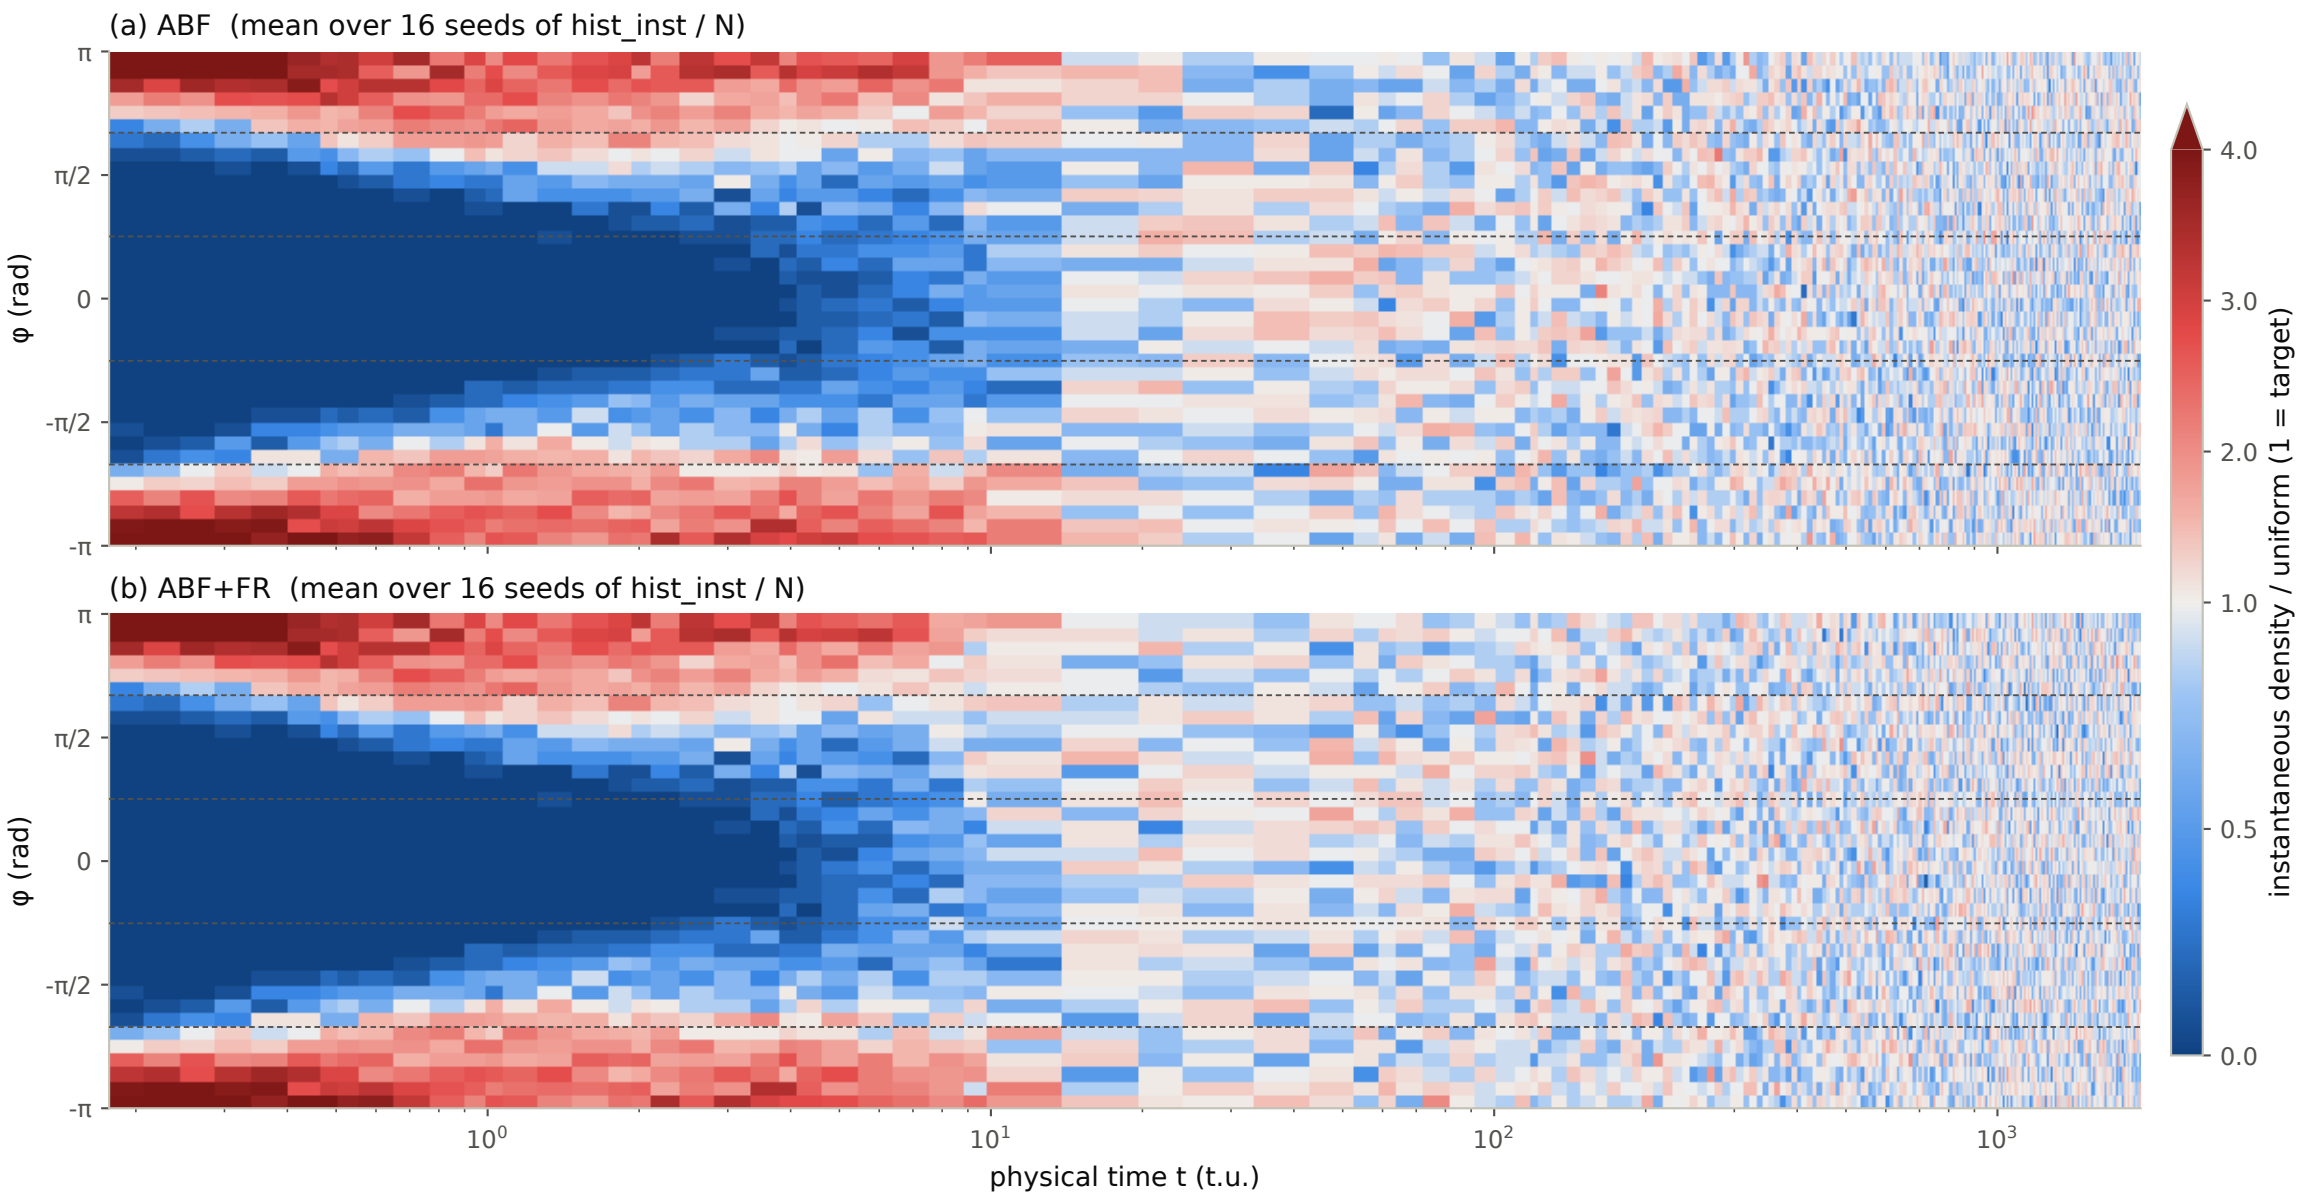

Identical diverging colour scale for every panel (and every N): blue = below the uniform target, grey = at target, red = above; clipped at 4x. Displayed on 36 CV bins (5 production bins each). Columns = every save (log time; budget grid + physical checkpoints).

Dashed horizontal guides: $|\phi| = 0.791$ rad (window $|z| < 1.5$ Å) and $|\phi| = 2.109$ rad (cage $|z| > 4$ Å).

eqb_plot_config/2 · config lta_150K_production.json · 2026-10-10 07:17 UTC