

Entropic gateway: e_F vs measured wall-clock at every (N, T_N) of the ladder, routed backend (median, 25-75 % over 24 production seeds; dashed: mid threshold;
dot / dotted line: median W_mid, the wall time to persistent mid-threshold accuracy, which can exceed the median curve's first crossing)



Ethane / LTA 300 K: e_F vs measured wall-clock at every (N, T_N) of the ladder, routed backend (median, 25-75 % over 24 production seeds; dashed: mid threshold; dot / dotted line: median W_mid, the wall time to persistent mid-threshold accuracy, which can exceed the median curve's first crossing)

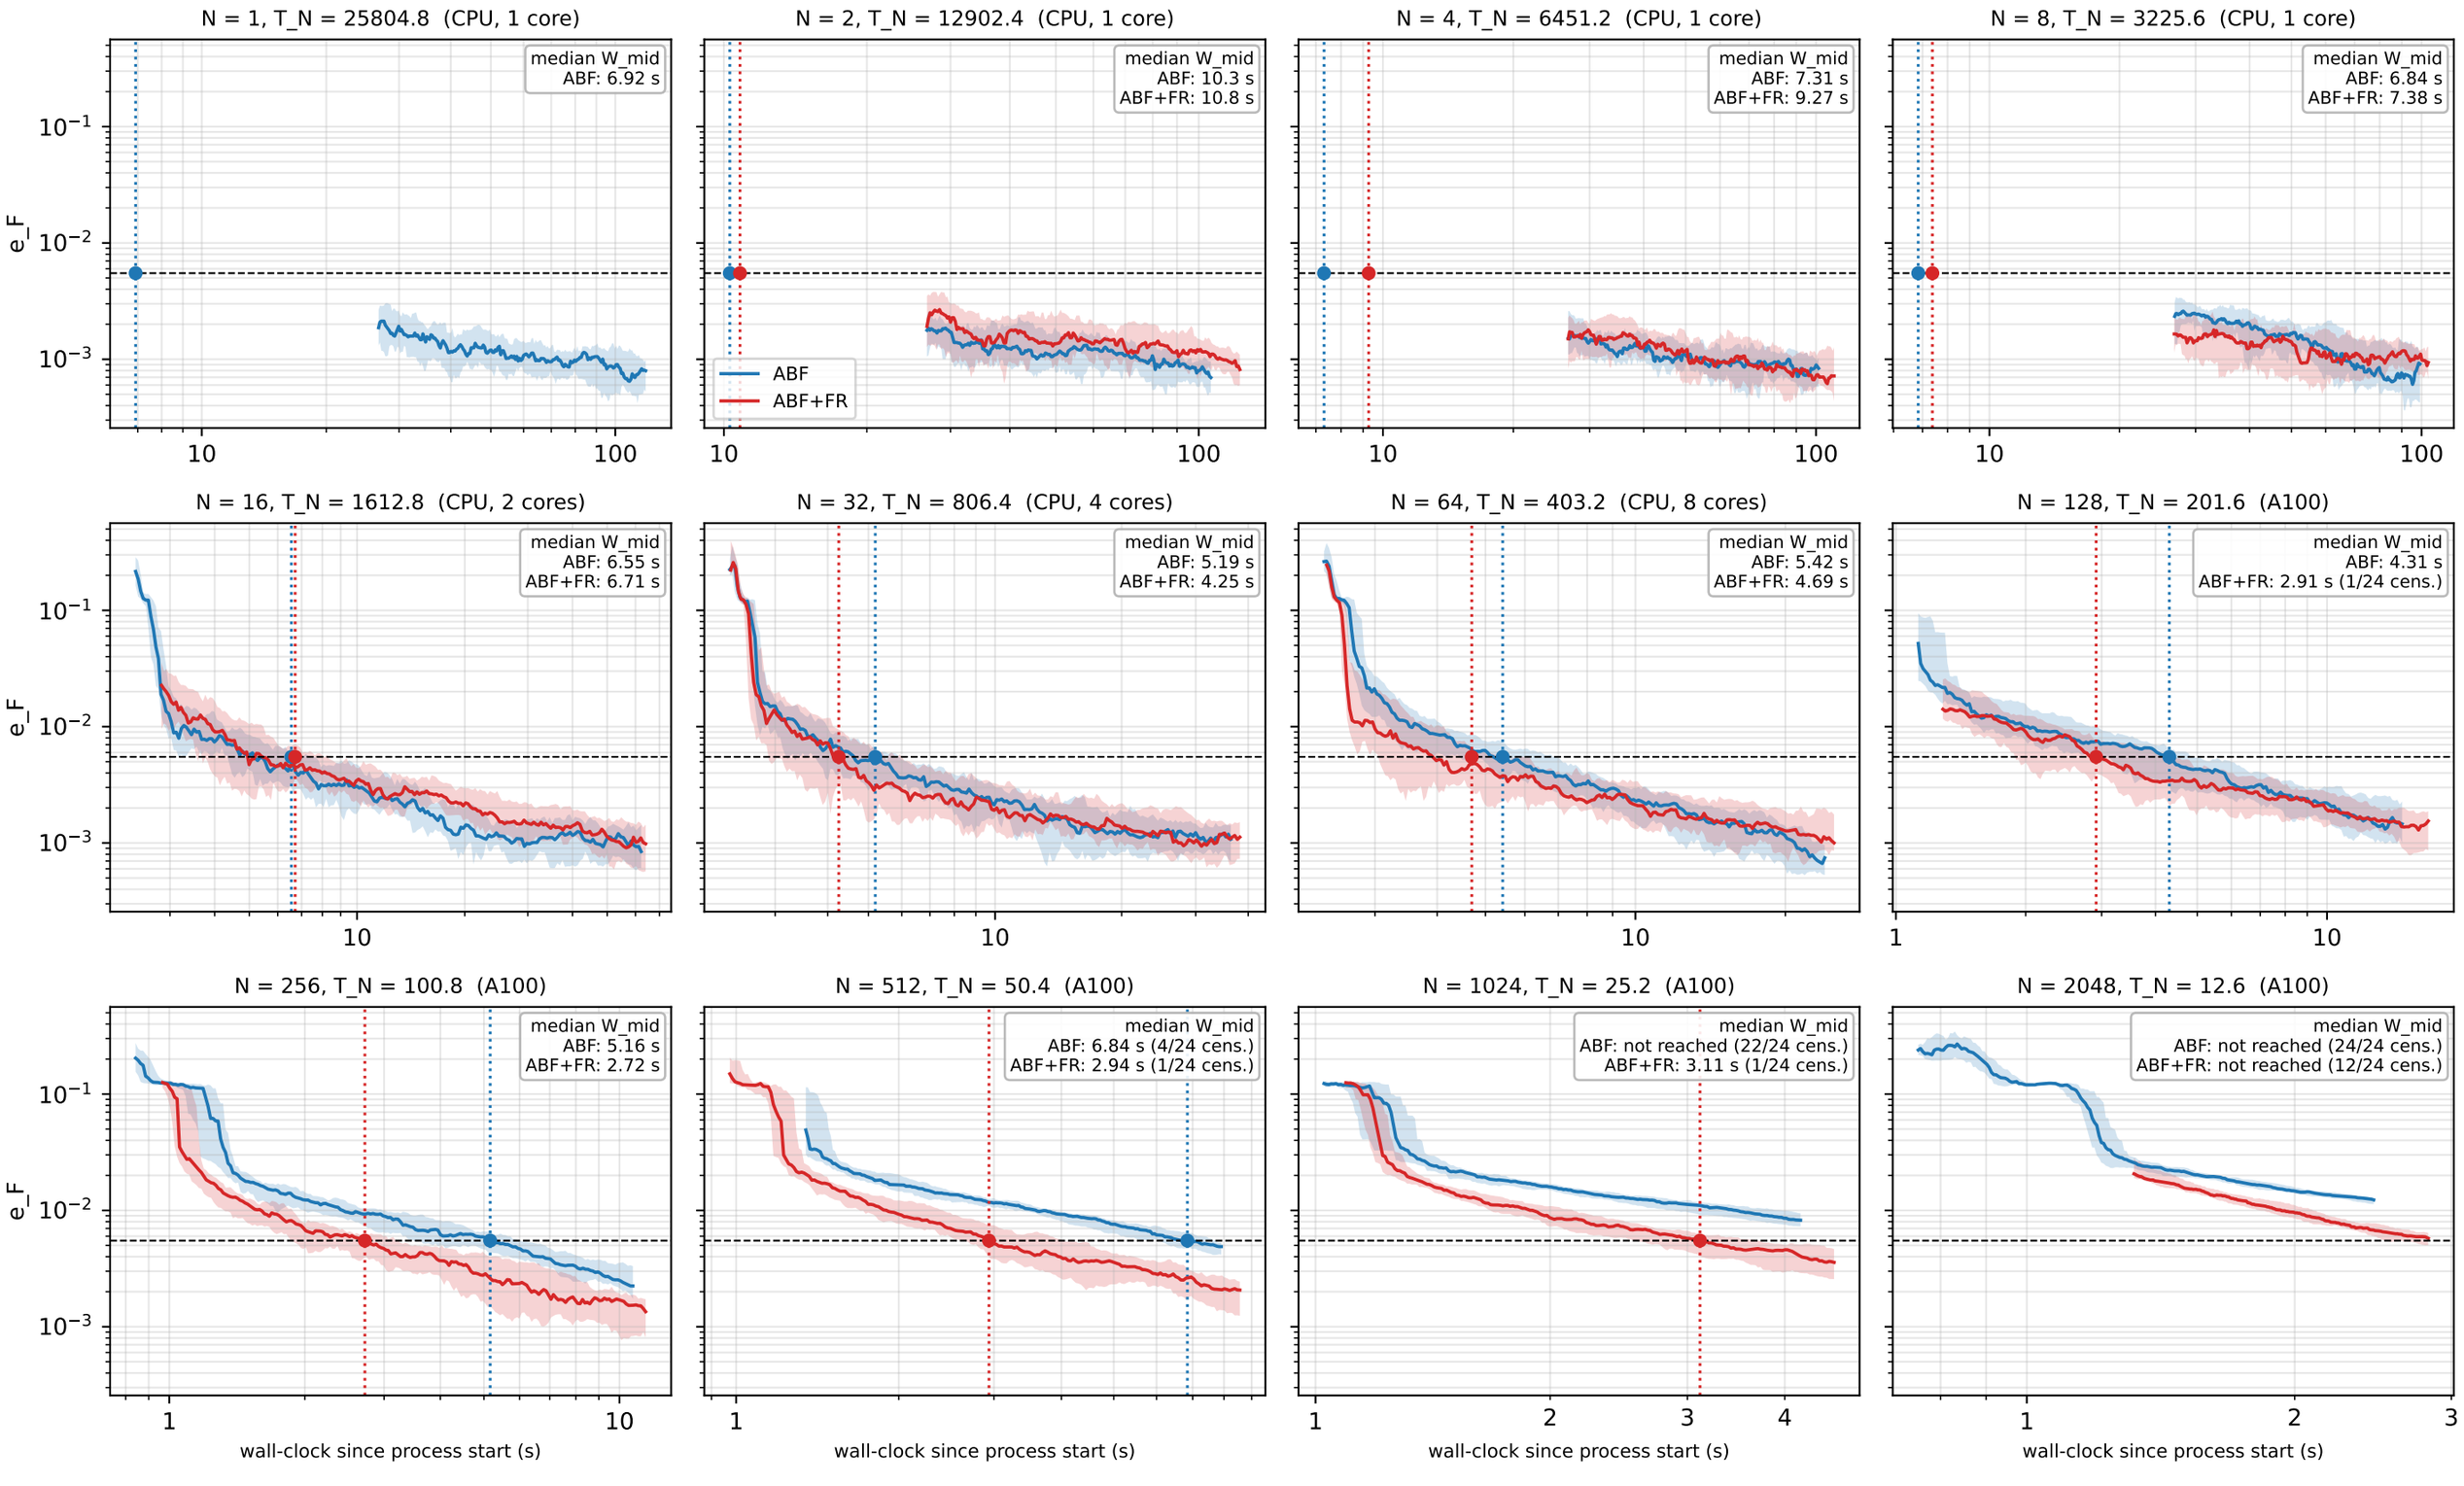

Ethane / LTA 150 K: e_F vs measured wall-clock at every (N, T_N) of the ladder, routed backend (median, 25-75 % over 24 production seeds; dashed: mid threshold; dot / dotted line: median W_mid, the wall time to persistent mid-threshold accuracy, which can exceed the median curve's first crossing)

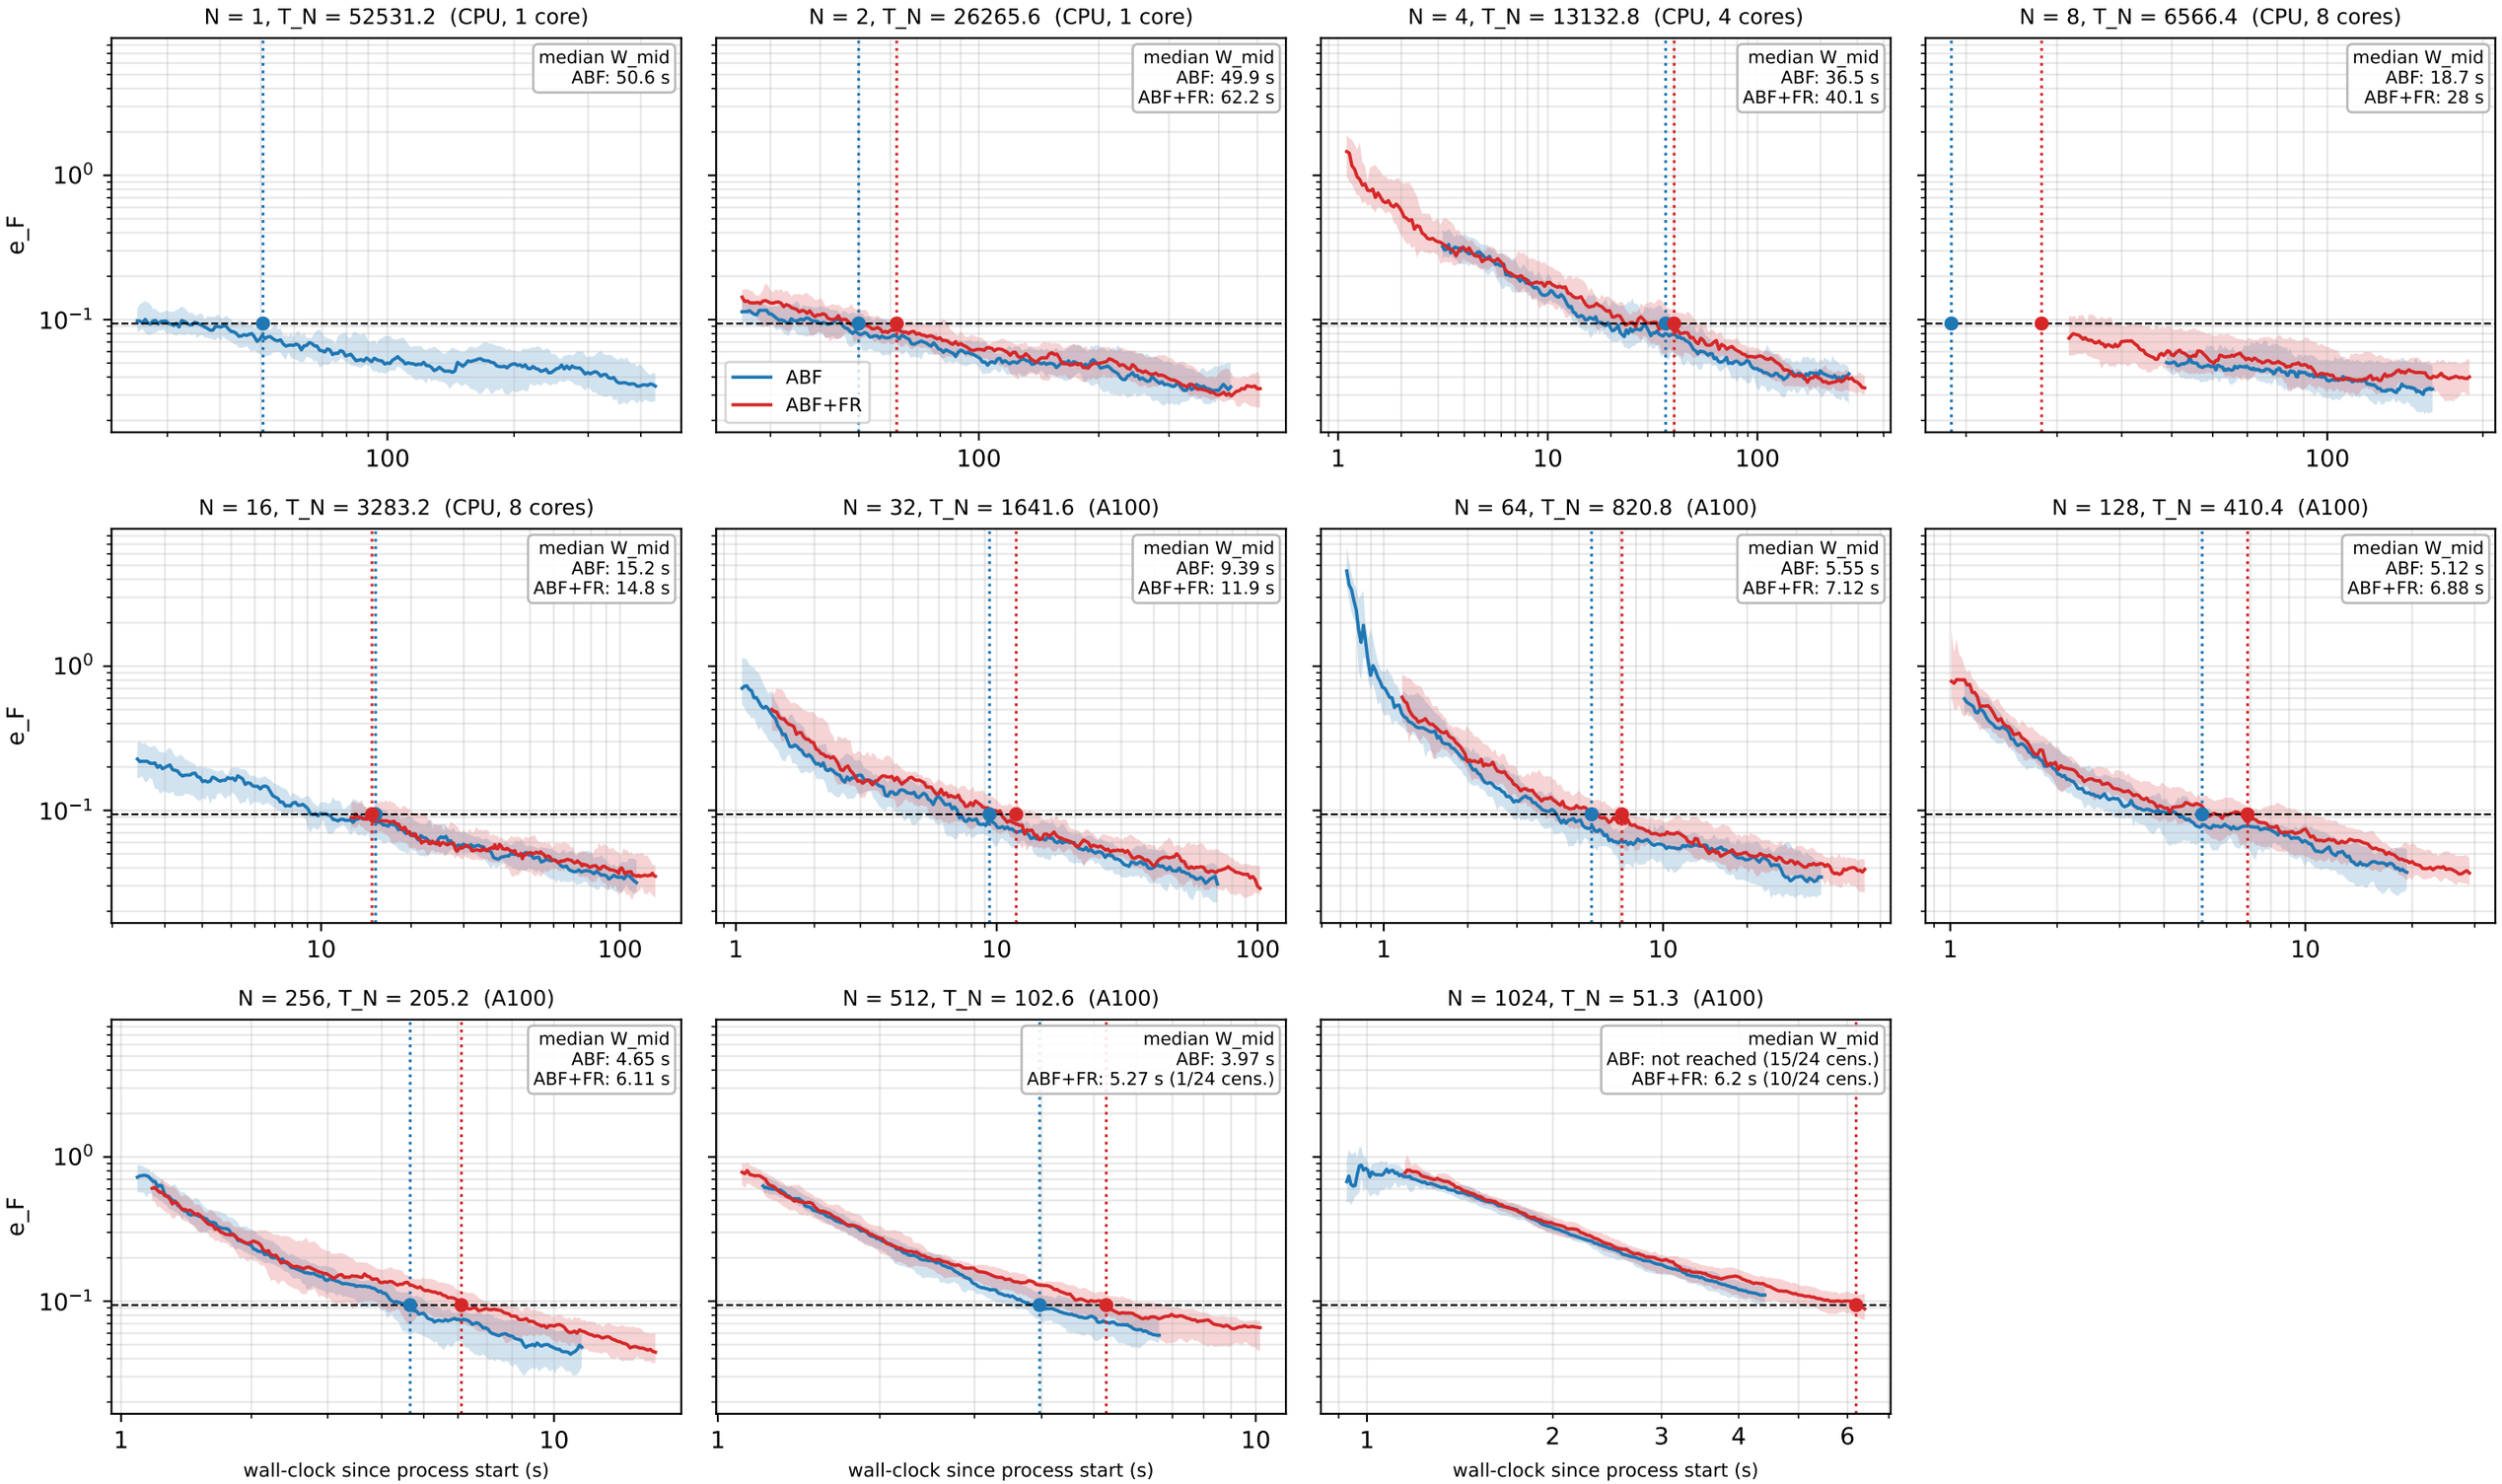