Ring traffic and directional bandwidth

N = 8; sent bytes per rank = 1.75 × tensor bytes

140 GB: NVLink 544 ms | HDR 6,125 ms | RoCE 98,000 ms

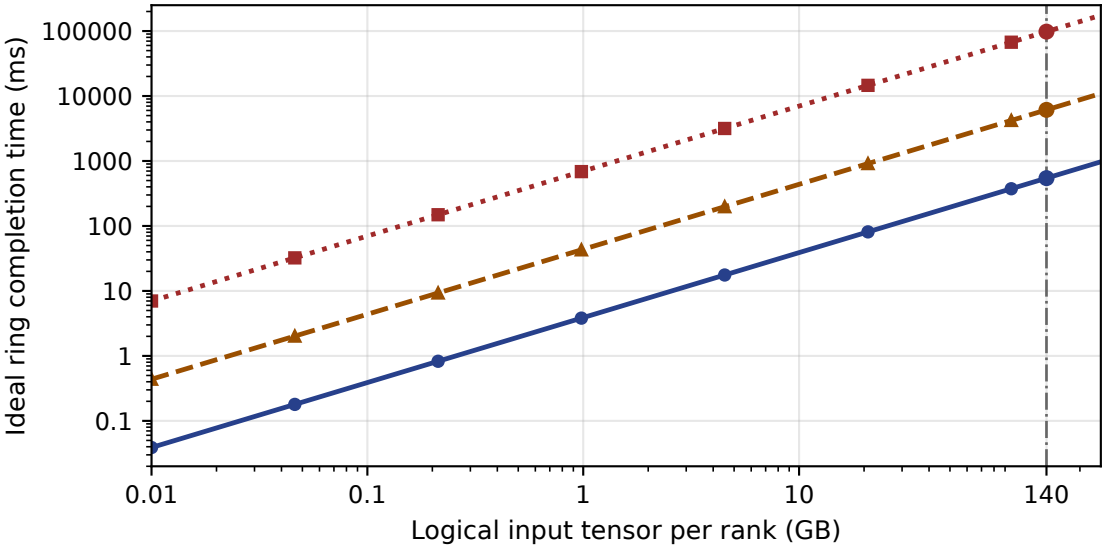

H100 NVLink: directional peak 450 GB/s

Two-rail HDR: assumed effective 40 GB/s

25GbE RoCE: assumed effective 2.5 GB/s

Analytical model; no offload, latency or overlap; not measured