

LiFePO₄ RV&Marine Battery

RTL12.8-100/150/200

Restarsolar®
Restarsolar, power the life



Longer Service Life

Low maintenance batteries with stable chemistry.



Built In Circuit Protection

Battery Management System (BMS) is incorporated against abuse.



Better Storage

Up to 6 months thanks to its extremely low self discharge (LSD) rate and no risk of sulphation.




Quickly Recharge

Save time and increase productivity with less down time thanks to superior charge/discharge efficiency.




Extreme Heat Tolerance

Suitable for use in a wider range of applications where ambient temperature is unusually high: up to +60°C

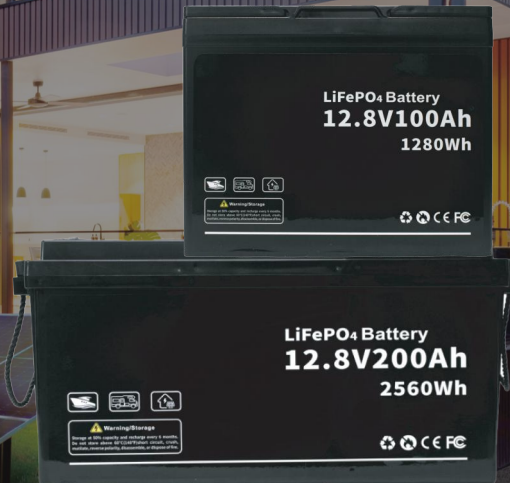


Product Dimension Diagram


RTL12.8-100

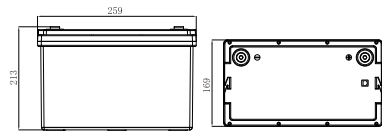

RTL12.8-150

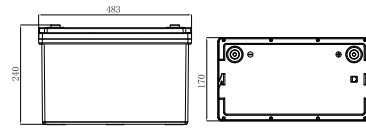

RTL12.8-200

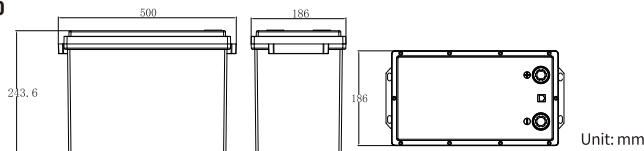

Unit: mm

Application

- Electric vehicles.
- Solar/wind energy storage system.
- UPS, backup power.
- Telecommunication
- Medical equipment
- Lighting

Electrical Characteristics	RTL12.8-100	RTL12.8-150	RTL12.8-200
Nominal Voltage	12.8V		
Nominal Capacity	100Ah (Cs,25°C)	150Ah (Cs,25°C)	200Ah (Cs,25°C)
Energy	1280Wh	1920Wh	2560Wh
Internal Resistance	<10mΩ@50%SOC		
Cycle Life	>6000cycles@0.5C&80%DOD	>6000cycles@0.5C&80%DOD	>4000cycles@0.5C&80%DOD
Months Self Discharge	<3%		
Efficiency of Charge	100%@1C	100%@0.5C	100%@1C
Efficiency of Discharge	96-99%@1C	96-99%@0.5C	96-99%@1C
Standard Charge			
Charge Mode	0.5C to 14.6V, then 14.6V, charge to current till 0.02C(CC/CV)	0.5C to 14.6V, then 14.6V, charge to current till 0.5C(CC/CV)	0.2C to 14.6V, then 14.6V, charge to current till 0.02C(CC/CV)
Continuous Current	100A	75A	200A
Recom. Charge Current	50A	30A	100A
Max. Charge Current	200A<2S	150A	400A<2S
Charge Cut-off Voltage	14.6V±0.2V		
Standard Discharge			
Continuous Current	100A	75A	200A
Recom. Discharge Current	50A	30A	100A
Max. Pulse Discharge Current	200A<2S	150A	400A<2S
Discharge Cut-off Voltage	10.8V		
Environmental			
Charge Temperature	0°C to 45 °C(32°F to 113°F)@60±25% Relative Humidity		
Discharge Temperature	-20°C to 60°C(-4°F to 140°F)@60±25% Relative Humidity		
Storage Temperature	0°C to 40°C (32°F to 104°F)@60±25% Relative Humidity		
Water Dust Resistance	IP65		
Mechanical			
Cell & Method	3.2V100Ah-4S1P(UL9540/UL1973)	3.2V150Ah-4S1P(UL9540/UL1973)	CORNEX 3.2V100Ah-4S2P(UL9540/UL1973)
Case	ABS		
Dimensions (in./mm.)	259x169x213mm/Package:289x199x243mm	483x170x240mm/Package:515x200x270mm	500x186x243.6mm/Package:530x216x273.6mm
Weight (lbs./kg.)	N.W.9.5Kg/G.W.: 10.5Kg	N.W.13Kg/G.W.: 13.5Kg	N.W.20.5Kg/G.W.: 23Kg
Terminal	M8		
Communication	CAN / bluetooth (optional)		
BMS	4S100A	4S150A	4S200A
Parallel	Up to 4 units		


LiFePO₄ RV&Marine Battery

RTL-12.8-100/150/200




» Model Performance Diagrams


Number of Cycles Vs. DOD

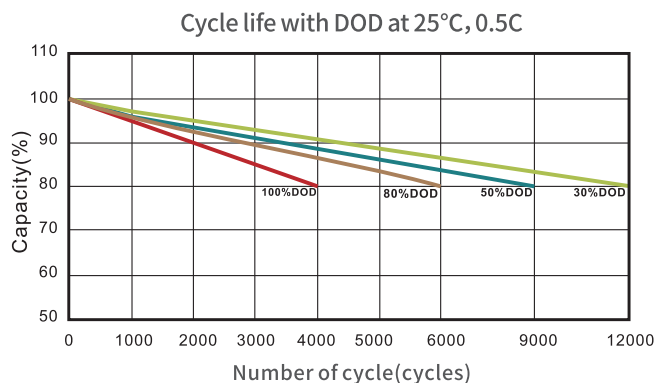


Discharge Performance at R.T.

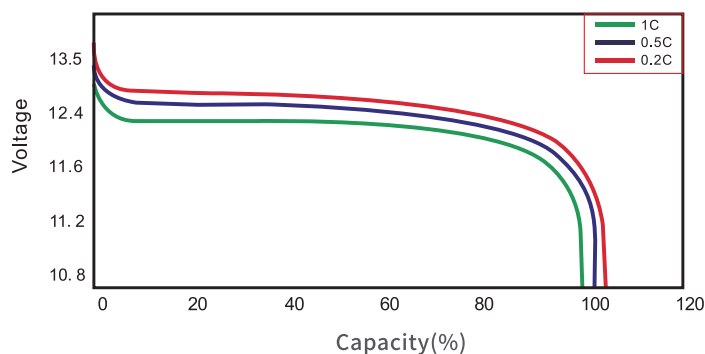


Battery Capacity (C) VS. Open Circuit Voltage (OCV)

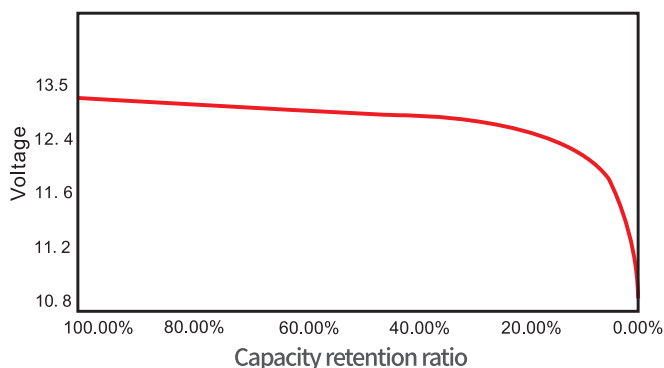


Battery Capacity Vs. Charging Time

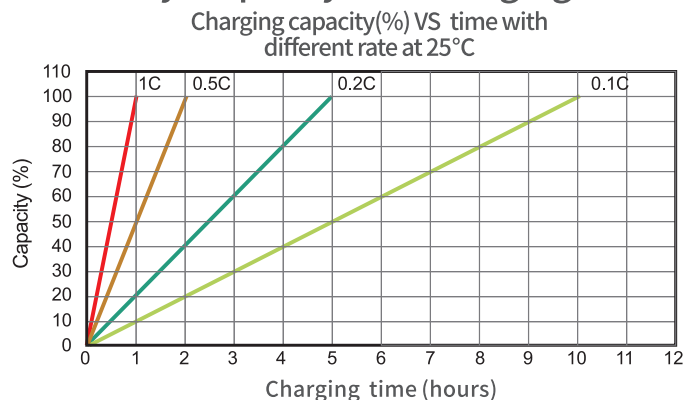

Cycle Life in Relation to Temperature

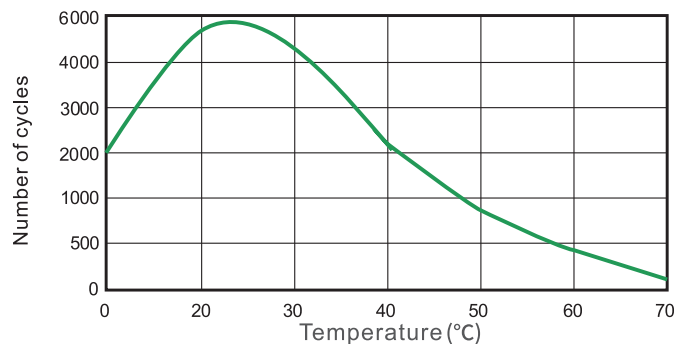

Temperature Effects on Capacity

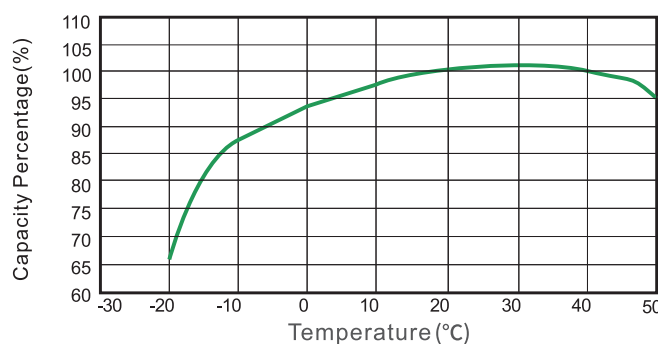

RESTAR SOLAR RENEWABLE ENERGY CO.,LTD

No.30 Yongshun Road, Zhulin Town, Jintan District, Changzhou, Jiangsu Province, China

Web: www.restarsolar.com

Email: info@restarsolar.com

Tel: +86 512-66292101

