

Series

系列

MPK⁶

Quality Maker®
estarsolar

MPPT

MPK6-40



MPK6-60



MPK6-80



开路电压
系统电压
额定充电电流

Open circuit voltage
System voltage
Rated Charge Current

<150V
12V/24V/36V/48V
30A-100A

功能介绍

Function
introduction



MPPT



全面保护
Protections



强制风冷散热
Forced air cooling



工作参数可调
Parameters adjustable



按键操作
Button mode




LCD 彩显
LCD color display



温度补偿
Temperature compensation



通讯端口(选配)
RS485/RJ45 port (Optional)

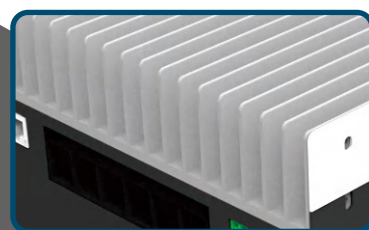

大型散热器
large-scale

产品规格

Product specification

MPPT



安装孔距— $\varnothing 5$
Mounting hole Size



MPK6-40

额定电压	额定充电电流	产品尺寸	Rated Voltage	Rated Charge Current	Product size
12V/24V/36V/48V 自动识别	30A/40A	235x168x95 mm	12V/24V/36V/48V Auto	30A/40A	235x168x95 mm



安装孔距— $\varnothing 5$
Mounting hole Size



MPK6-60

额定电压	额定充电电流	产品尺寸	Rated Voltage	Rated Charge Current	Product size
12V/24V/36V/48V 自动识别	50A/60A	265x180x100 mm	12V/24V/36V/48V Auto	50A/60A	265x180x100 mm



安装孔距— $\varnothing 5$
Mounting hole Size



MPK6-80

额定电压	额定充电电流	产品尺寸	Rated Voltage	Rated Charge Current	Product size
12V/24V/36V/48V 自动识别	80A/100A	340x200x115 mm	12V/24V/36V/48V Auto	80A/100A	340x200x115 mm

包装信息

Packaging information



MPK6-40

基本参数/Specification	30A/40A
每箱数量/Set/Carton	8PCS
每箱重量/Weight/Carton	22Kg
包装尺寸/Measurement	600x460x350mm
外箱体积/Volume/Carton	0.1CBM



MPK6-60

基本参数/Specification	50A/60A
每箱数量/Set/Carton	4PCS
每箱重量/Weight/Carton	14Kg
包装尺寸/Measurement	480x375x335mm
外箱体积/Volume/Carton	0.06CBM



MPK6-80

基本参数/Specification	80A/100A
每箱数量/Set/Carton	4PCS
每箱重量/Weight/Carton	18.7Kg
包装尺寸/Measurement	560x435x410mm
外箱体积/Volume/Carton	0.1CBM



Product display

