




MPPT SOLAR CHARGE CONTROLLER



Battery type

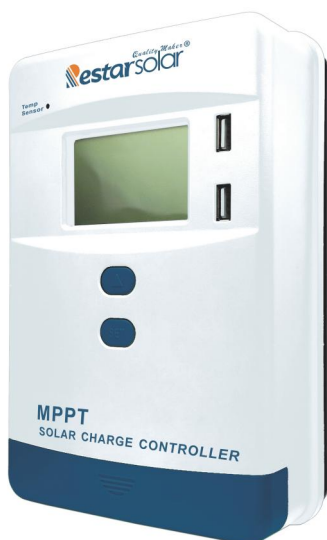

Protections



USB Output




Button mode



LCD
Color display



Parameters
adjustable



Temperature
compensation




Support Bluetooth
communication
(built in optional)

- Backlight Design
- Input current &. voltage display
- Output current display
- USB output
- 12V/24V auto. voltage distinguish function
- Over-charge, over-discharge, short-circuit protections, to ensure system safe and prolong battery life.
- With battery temperature compensation, ensure best charge status in different environment.
- Three stage charge mode: strong charge, constant current, Floating charge intelligent control



INSTALL &. UNINSTALL GUIDE:

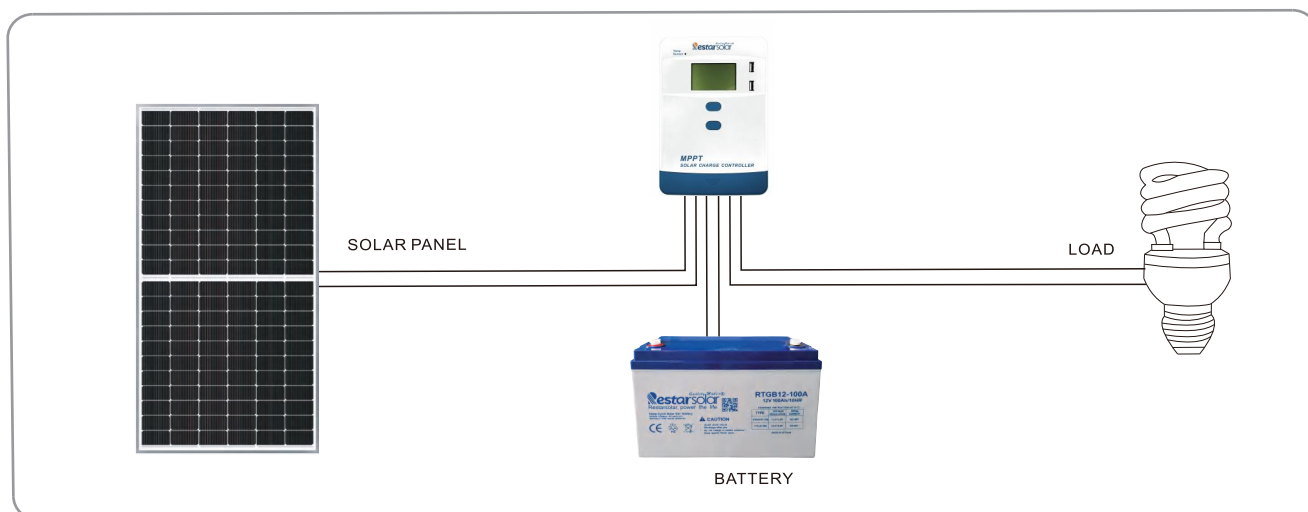

Product Specification

Model		RT-MRL10	RT-MRL20	RT-MRL30	RT-MRL4024	RT-MRL6024	
Input							
Rated Charge Current		10A	20A	30A	40A	50A	60A
Maximum PV open circuit voltage		100V (at the lowest temperature), 92V (at a normal temperature of 25°C)					
System voltage		12V / 24V / Auto					
Maximum battery voltage		8V ~ 32V					
PV maximum input power	12V	130W	130W	130W	130W	130W	130W
	24V	260W	260W	260W	260W	260W	260W
Output							
Battery Type		GEL,SLD,FLD , Lithium batteries customization					
Balanced charging voltage		Maintenance of lead-acid batteries for rabbits: 14.6V Colloid: None; Lead-acid flooded battery: 14.8V Duration: 2 hours					
Absorb charging voltage		Maintenance-free lead-acid battery: 14.4 V Colloid: None; Lead-acid battery: 14.6V Duration: 2 hours					
Float charging voltage		Maintenance-free lead-acid battery, gel, lead-acid flooded battery: 13.8V					
Low-voltage recovery voltage		Maintenance-free lead-acid battery, gel, lead-acid flooded battery: 12.6V					
Low-voltage disconnect voltage		Maintenance-free lead-acid battery, gel, lead-acid flooded battery: 10.8V					
Static loss		≤50mA					
High voltage protection		Lead-acid battery 16V					
Light-controlled point voltage		5V/10V/15V/20V					
Temperature compensation coefficient		-4mV/C/2V(25°C)					
Voltage drop in discharge circuit		≤0.2V					
Temperature range of display screen		-20°C~+70°C					
Operating ambient temperature range		-20°C~+55°C					
Storage environment temperature		-30°C ~ +80°C					
Humidity in the working environment		≤90% without condensation phenomenon					
protection grade		IP30					
grounding type		Positive electrode grounding					
Product size		175mm*120mm*47mm		215mm*145mm*75mm		261mm*191mm*84mm	
Installation size		120mm*108mm		133mm*130mm		180mm*214mm	
Installation aperture		φ5mm					
Terminal wire diameter		10mm²/7AWG		16mm²/5AWG		25mm²/3AWG	
Optional Features		Remote communication RS485/RJ45 interface					
Voltage parameters are all 12V (ambient temperature 25°C), 24V system parameters							