


Off-Grid Solar Inverter

3.6kVA~6kVA



General introduction

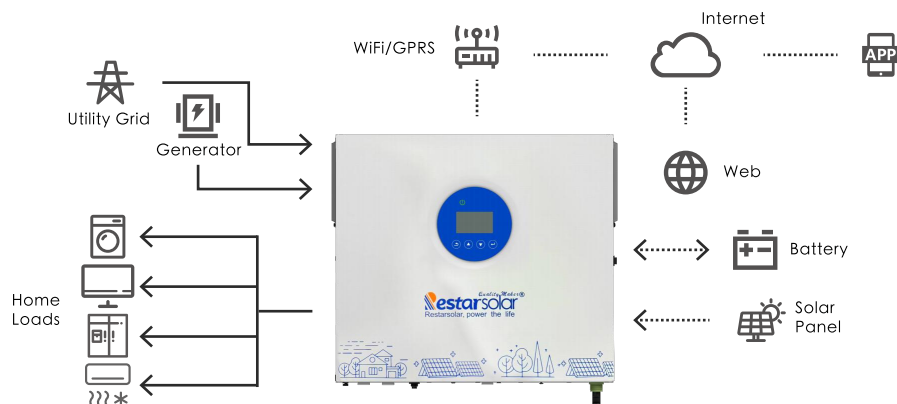

Features

✓ Safety

- 6kV lightning protection
- DC - DC high frequency isolating converter
- Battery input and AC output fully isolation

🌿 Green

- Up to 94% efficiency
- Output power factor is 1.0
- Intelligent cooling fan control

🔗 Reliable

- Widely input voltage of AC and PV
- Pure sine wave output
- High-frequency switching technology

⚡ Fast charging

- Build-in 120A MPPT solar charger
- Built-in communication port for BMS

👤 User-friendly

- Dot-matrix screen and physical button
- Built-in WiFi module (optional)
- APP support (optional)

🏠 Applications

- Support home appliances/office equipment/lighting equipment etc.
- Support lead-acid and lithium-ion battery
- Max. 6 units in parallel

Technical Specifications

Model	3.6kVA-24V		3.6kVA-48V		6kVA-48V	
Input(AC)						
Nominal Voltage	220/230/240Vac					
Selectable Voltage Range	170~280Vac(For Personal Computers) 90~280Vac(For Home Appliances)					
Frequency	50/60Hz (Auto Detection)					
Power Factor	0.98					
AC Switch	Optional					
Generator input	Support					
PV String Input(DC)						
Max PV Array Open Circuit Voltage Range	500Vdc					
Start-up Voltage	120Vdc					
Initial Feeding Voltage	150Vdc					
MPPT Voltage Range	120Vdc ~ 450Vdc					
Number of MPPT Trackers	1					
Maximum PV input Power	4000W		4000W		6000W	
DC Switch	Optional					
AC Output						
Nominal output Power	3600W/ 3600VA		3600W/ 3600VA		6000W/ 6000VA	
Nominal Voltage (Batt. Mode)	220 / 230(default) / 240Vac ± 5%, User Settable					
Surge Power	7200VA		7200VA		12000VA	
Transfer Time	15ms (For Personal Computers); 20ms (For Home Appliances)					
Waveform	Pure sine wave					
Output THDv(@Linear Load)	<3%					
PV Mode Maximum Efficiency	97.00%					
Battery Mode Efficiency(Peak)	90~94%					
Battery & Charge						
Norminal Votage(LiFePO4)	/		51.2Vdc		51.2Vdc	
Norminal Votage(Lead Acid)	24Vdc		48Vdc		48Vdc	
Max. AC charge Current	120A		60A		120A	
Max. Solar Charge Current	120A		60A		120A	
Max. Charge Current(Solar + AC charge current)	120A (User selectable)		60A (User selectable)		120A (User selectable)	
Interface & Mechanical						
Display	LCD & LED					
Parallel Function	Yes, 6 units					
Communication Interface	RS232 / USB; Optional: RS485 / CAN / Dry Contact / WIFI / Bluetooth					
Dimension (D*W*H/mm)	127*410*366					
Net Weight (kg)	11kg		11kg		12.5kg	
Protection						
Output Over-current Protection	Yes					
PV Rerverse Polarity Protection	Yes					
String Fault Detection	Yes					
Insulation Detection	Yes					
AC/DC Surge Protection	Yes					
General Specifications						
Operating Temperature	-10°C ~ 50°C					
Storage Temperature	-15°C ~ 60°C					
Relative Humidity	5%~ 95%, non-condensing					
Altitude	<3000m					
Protection Grade	IP21					

1. Specifications are subject to change without prior notice

2. Data above are typical values for reference only, not as a basis for engineering design