


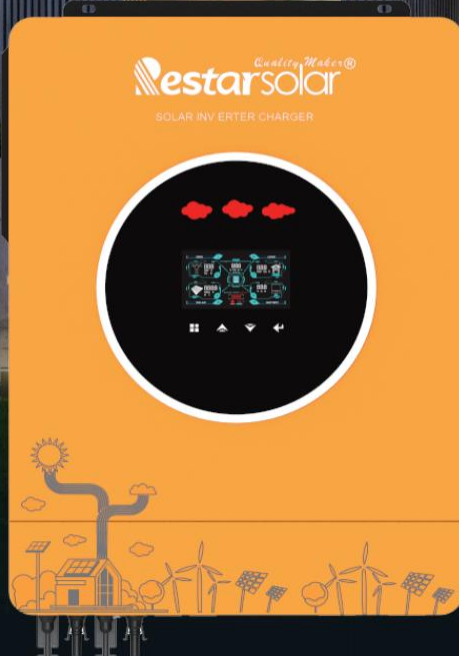

## >>> Features

- Pure sine wave solar inverter(on/off Grid)
- Output power factor 1.0
- WFI&GPRS available for IOS and Android
- Inverter running without battery
- One-click restoration to factory Settings
- Built-in lithium battery automatic activation
- Built-in 160A MPPT solar charger
- High PV input voltage range(90~450VDC)
- Built-in anti-dust kit for harsh environment
- Smart battery charge design to optimize battery life
- Dual output
- Touch button

## »» Product Data Sheet

| MODEL                                         | RT-HY 8.2KW                |  | RT-HY 10.2KW   |  |
|-----------------------------------------------|----------------------------|--|----------------|--|
| Maximum PV Input Power                        | 8200W                      |  | 10200W         |  |
| Rated Output Power                            | 8200W/8200VA               |  | 10200W/10200VA |  |
| Maximum Solar Charging Current                | 160A                       |  | 160A           |  |
| GRID-TIE OPERATION                            |                            |  |                |  |
| PV Input(DC)                                  |                            |  |                |  |
| Nominal DC Voltage/Maximum DC Voltage         | 360VDC/500VDC              |  |                |  |
| Start-up Voltage/Initial Feeding Voltage      | 90VDC/120VDC               |  |                |  |
| MPPT Voltage Range                            | 90VDC~450VDC               |  |                |  |
| Number of MPPT Trackers/Maximum Input Current | 1/27A                      |  |                |  |
| GRID OUTPUT(AC)                               |                            |  |                |  |
| Nominal Output Voltage                        | 220/230/240VAC             |  |                |  |
| Output Voltage Range                          | 195~253VAC                 |  |                |  |
| Nominal Output Current                        | 35.6A                      |  | 44.3A          |  |
| Power Factor                                  | >0.99                      |  |                |  |
| Feed-in Grid Frequency Range                  | 49~51±1Hz                  |  |                |  |
| EFFICIENCY                                    |                            |  |                |  |
| Maximum Conversion Efficiency(DC/AC)          | 98%                        |  |                |  |
| TWO LOAD OUTPUT POWER                         |                            |  |                |  |
| Full Load                                     | 8200W                      |  | 10200W         |  |
| Maximum Main Load                             | 8200W                      |  | 10200W         |  |
| Maximum Second Load(battery mode)             | 2733W                      |  | 3400W          |  |
| Main Load Cut Off Voltage                     | 44VDC                      |  | 44VDC          |  |
| Main Load Return Voltage                      | 48VDC                      |  | 48VDC          |  |
| OFF-GRID OPERATION                            |                            |  |                |  |
| AC INPUT                                      |                            |  |                |  |
| AC Start-up Voltage/Auto Restart Voltage      | 120-140VAC/180VAC          |  |                |  |
| Acceptable Input Voltage Range                | 280VAC or 170-280VAC       |  |                |  |
| Maximum AC Input Current                      | 40A                        |  | 50A            |  |
| Nominal operating frequency                   | 50/60Hz                    |  |                |  |
| Surge power                                   | 16400W                     |  | 20400W         |  |
| PV INPUT(DC)                                  |                            |  |                |  |
| Maximum DC Voltage                            | 500VDC                     |  |                |  |
| MPPT Voltage Range                            | 90VDC~450VDC               |  |                |  |
| Number of MPPT Trackers/Maximum Input Current | 1/27A                      |  |                |  |
| BATTERY MODE OUTPUT(AC)                       |                            |  |                |  |
| Nominal Output Voltage                        | 48VDC                      |  | 48VDC          |  |
| Output Waveform                               | Pure sine wave             |  |                |  |
| Efficiency(DC to AC)                          | 94%                        |  |                |  |
| BATTERY & CHARGER                             |                            |  |                |  |
| Nominal DC Voltage                            | 48VDC                      |  | 48VDC          |  |
| Maximum Solar Charging Current                | 160A                       |  | 160A           |  |
| Maximum AC Charging Current                   | 140A                       |  | 160A           |  |
| GENERAL                                       |                            |  |                |  |
| PHYSICAL                                      |                            |  |                |  |
| Dimension,D X W X H(mm)                       | 555*405*135                |  |                |  |
| Cartoon Dimension,D X W XH(mm)                | 620*465*215                |  |                |  |
| Dimensions of mounting holes(mm)              | 255- Ø 5x2                 |  |                |  |
| Net Weight(kgs)                               | 14.2                       |  | 14.5           |  |
| Gross Weight(kgs)                             | 15.7                       |  | 16.0           |  |
| INTERFACE                                     |                            |  |                |  |
| Communication Port                            | RS232/WIFI/Remove LCD/GPRS |  |                |  |
| ENVIRONMENT                                   |                            |  |                |  |
| Operating Temperature                         | - 10 ~50℃                  |  |                |  |