



RESTAR SOLAR RENEWABLE ENERGY CO.,LTD







WEB: [www.restarsolar.com](http://www.restarsolar.com)  
EMAIL: [info@restarsolar.com](mailto:info@restarsolar.com)



RESTAR SOLAR RENEWABLE ENERGY CO.,LTD

CKD:Complete-knock-down. CKD means the proudcuts have not been finished fomaing, The importer purchase all the spare parts and foam, assemble by themselves, they have to import the equipment and tools to finish the foaming and assembling. we can help our customers to build up the facotry, train the worker and provide the

spare parts and the equipment. The investment amount is up to the customer requirement, from 45k usd to 800k usd, from freezer to refrigerator, air conditioner or cooler, we have the richful experiences to help our customer to make the factory to produce all the refrigeration products they dream of.

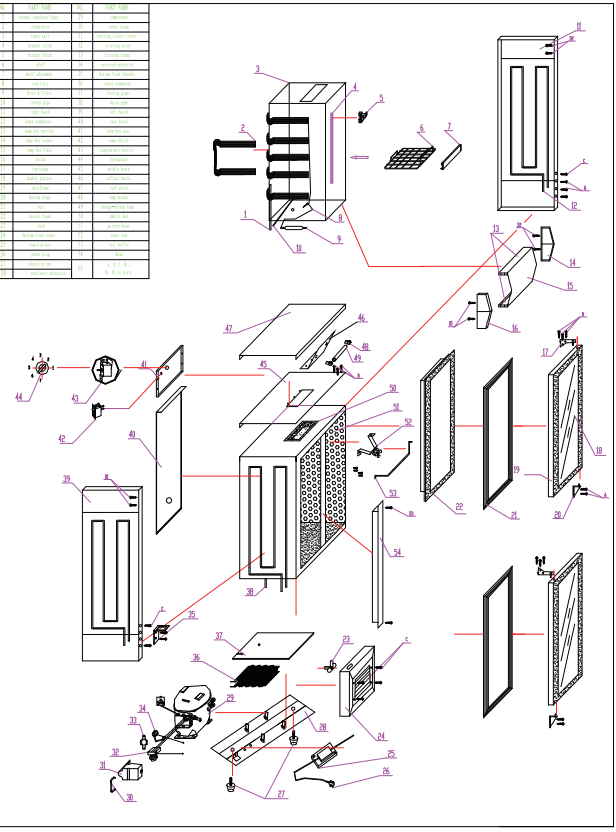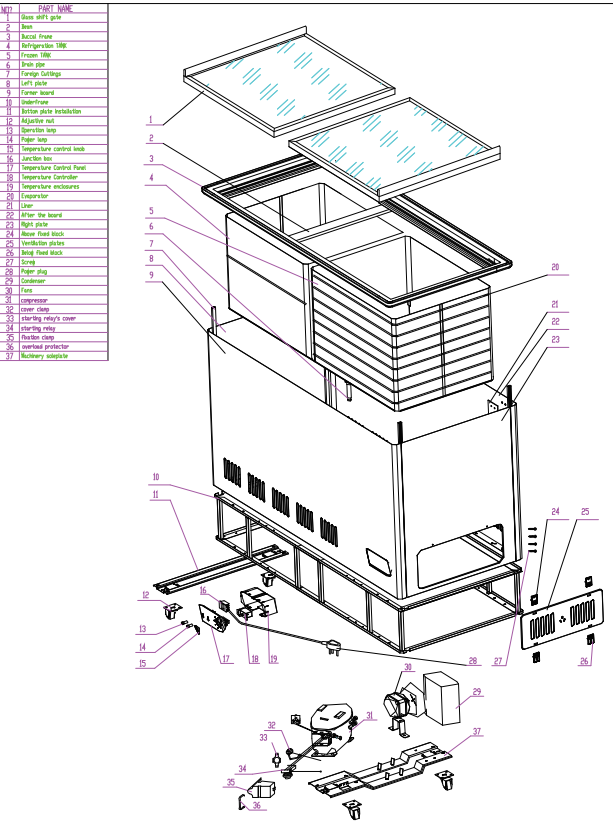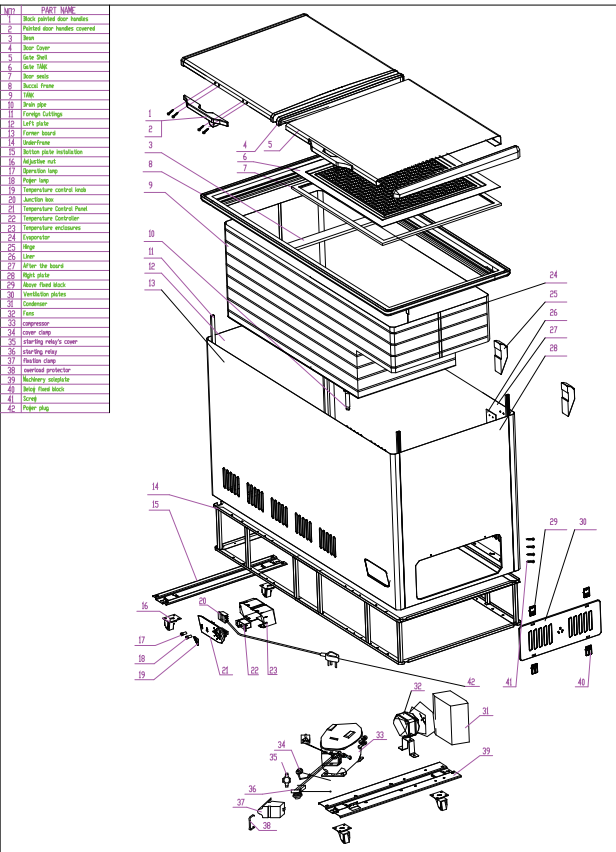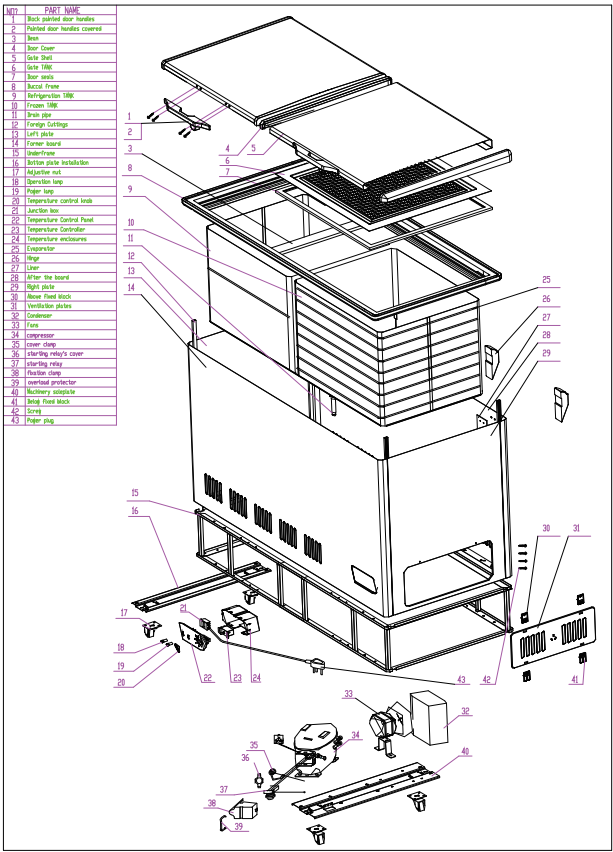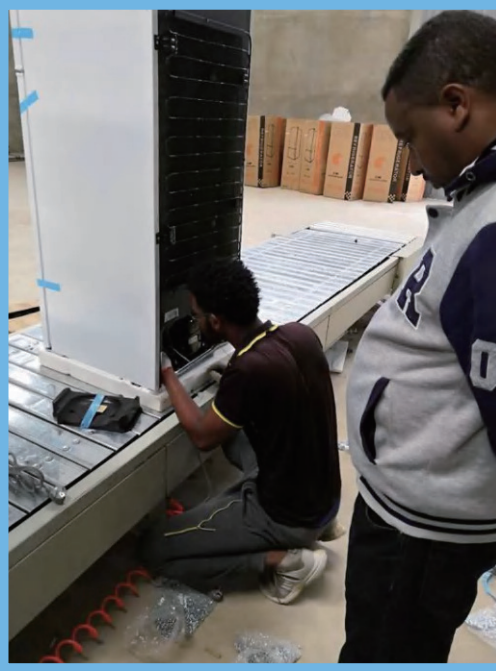



# REFRIGERATOR

## Solar Single Door Refrigerator



### BC-50

|                       |                                    |
|-----------------------|------------------------------------|
| Input voltage(V)      | 12V/24V/220V                       |
| Capacity(freeze room) | 5 L                                |
| Temperature range     | 1~10 for fridge, <=-18 for freezer |
| Product size(mm)      | 480*445*500                        |
| Carton size(mm)       | 500*465*530                        |
| Loading qty in 40HQ   | 573                                |
| G.W/N.W(KG)           | 13/11                              |
| Refrigerant           | R134A/R600a                        |



### BC-70

|                       |                                    |
|-----------------------|------------------------------------|
| Input voltage(V)      | 12V/24V/220V                       |
| Capacity(freeze room) | 6 L                                |
| Temperature range     | 1~10 for fridge, <=-18 for freezer |
| Product size(mm)      | 450*405*845                        |
| Carton size(mm)       | 465*425*870                        |
| Loading qty in 40HQ   | 414                                |
| G.W/N.W(KG)           | 17/15                              |
| Refrigerant           | R134A/R600a                        |



### BC-90

|                       |                                    |
|-----------------------|------------------------------------|
| Input voltage(V)      | 12V/24V/220V                       |
| Capacity(freeze room) | 8 L                                |
| Temperature range     | 1~10 for fridge, <=-18 for freezer |
| Product size(mm)      | 480*445*845                        |
| Carton size(mm)       | 500*465*870                        |
| Loading qty in 40HQ   | 352                                |
| G.W/N.W(KG)           | 23/21                              |
| Refrigerant           | R134A/R600a                        |

# REFRIGERATOR

## Solar Top Freezer Refrigerator



### BCD-108

|                       |                                     |
|-----------------------|-------------------------------------|
| Input voltage(V)      | 12V/24V/220V                        |
| Capacity(freeze room) | 41 L                                |
| Temperature range     | 0-10 for fridge ,<= -18 for freezer |
| Product size(mm)      | 450*460*1250                        |
| Carton size(mm)       | 465*480*1305                        |
| Loading qty in 40HQ   | 240                                 |
| G.W/N.W(KG)           | 32/29                               |
| Refrigerant           | R134A/R600a                         |



### BCD-118

|                       |                                     |
|-----------------------|-------------------------------------|
| Input voltage(V)      | 12V/24V/220V                        |
| Capacity(freeze room) | 39 L                                |
| Temperature range     | 0-10 for fridge ,<= -18 for freezer |
| Product size(mm)      | 480*490*1105                        |
| Carton size(mm)       | 500*540*1160                        |
| Loading qty in 40HQ   | 184                                 |
| G.W/N.W(KG)           | 31/27                               |
| Refrigerant           | R134A/R600a                         |



### BCD-142

|                       |                                     |
|-----------------------|-------------------------------------|
| Input voltage(V)      | 12V/24V/220V                        |
| Capacity(freeze room) | 39 L                                |
| Temperature range     | 0-10 for fridge ,<= -18 for freezer |
| Product size(mm)      | 480*490*1265                        |
| Carton size(mm)       | 500*540*1320                        |
| Loading qty in 40HQ   | 184                                 |
| G.W/N.W(KG)           | 35/33                               |
| Refrigerant           | R134A/R600a                         |





## BCD-178

|                       |                                     |
|-----------------------|-------------------------------------|
| Input voltage(V)      | 12V/24V/220V                        |
| Capacity(freeze room) | 39 L                                |
| Temperature range     | 0-10 for fridge ,<= -18 for freezer |
| Product size(mm)      | 500*565*1290                        |
| Carton size(mm)       | 535*620*1340                        |
| Loading qty in 40HQ   | 160                                 |
| G.W/N.W(KG)           | 42/38                               |
| Refrigerant           | R134A/R600a                         |



## BCD-218

|                       |                                     |
|-----------------------|-------------------------------------|
| Input voltage(V)      | 12V/24V/220V                        |
| Capacity(freeze room) | 45 L                                |
| Temperature range     | 0-10 for fridge ,<= -18 for freezer |
| Product size(mm)      | 550*575*1390                        |
| Carton size(mm)       | 570*605*1450                        |
| Loading qty in 40HQ   | 142                                 |
| G.W/N.W(KG)           | 46/41                               |
| Refrigerant           | R134A/R600a                         |



## BCD-198

|                       |                                     |
|-----------------------|-------------------------------------|
| Input voltage(V)      | 12V/24V/220V                        |
| Capacity(freeze room) | 80 L                                |
| Temperature range     | 0-10 for fridge ,<= -18 for freezer |
| Product size(mm)      | 520*550*1515                        |
| Carton size(mm)       | 560*600*1550                        |
| Loading qty in 40HQ   | 136                                 |
| G.W/N.W(KG)           | 48/43                               |
| Refrigerant           | R134A/R600a                         |



## BCD-268

|                       |                                     |
|-----------------------|-------------------------------------|
| Input voltage(V)      | 12V/24V/220V                        |
| Capacity(freeze room) | 55 L                                |
| Temperature range     | 0-10 for fridge ,<= -18 for freezer |
| Product size(mm)      | 550*570*1619                        |
| Carton size(mm)       | 570*600*1680                        |
| Loading qty in 40HQ   | 106                                 |
| G.W/N.W(KG)           | 51/46                               |
| Refrigerant           | R134A/R600a                         |

# FREEZER

## Solar Chest Freezer




### BD/BC-108

|                       |               |
|-----------------------|---------------|
| Input voltage(V)      | 12V/24V/220V  |
| Capacity(freeze room) | 108 Litre     |
| Temperature range     | <= -18 degree |
| Product size(mm)      | 580*555*840   |
| Carton size(mm)       | 620*580*885   |
| Loading qty in 40HQ   | 228           |
| G.W/N.W(KG)           | 30/27         |
| Refrigerant           | R134A/R600a   |



### BD/BC-158


|                       |               |
|-----------------------|---------------|
| Input voltage(V)      | 12V/24V/220V  |
| Capacity(freeze room) | 158 Litre     |
| Temperature range     | <= -18 degree |
| Product size(mm)      | 750*555*840   |
| Carton size(mm)       | 790*580*885   |
| Loading qty in 40HQ   | 180           |
| G.W/N.W(KG)           | 35/32         |
| Refrigerant           | R134A/R600a   |

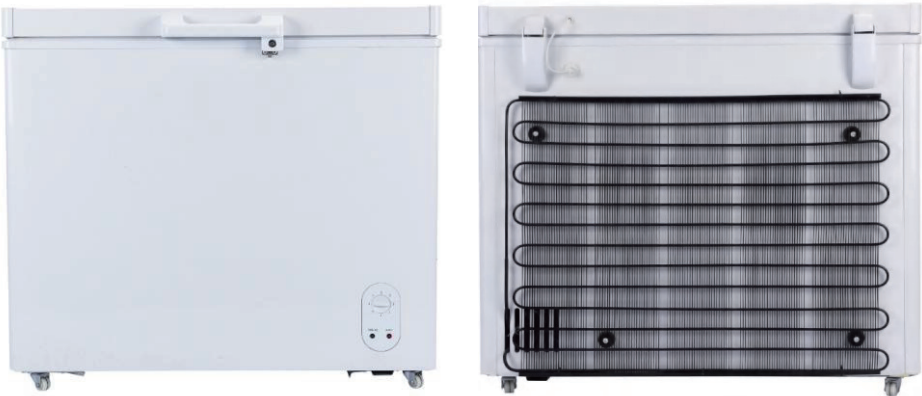

### BD/BC-208

|                       |               |
|-----------------------|---------------|
| Input voltage(V)      | 12V/24V/220V  |
| Capacity(freeze room) | 208 Litre     |
| Temperature range     | <= -18 degree |
| Product size(mm)      | 906*555*840   |
| Carton size(mm)       | 946*580*885   |
| Loading qty in 40HQ   | 148           |
| G.W/N.W(KG)           | 39/36         |
| Refrigerant           | R134A/R600a   |



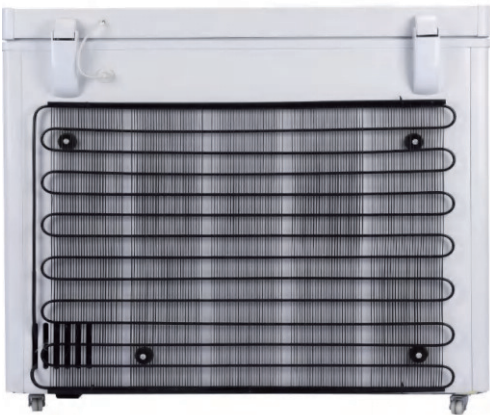

## BD/BC-258

|                       |               |
|-----------------------|---------------|
| Input voltage(V)      | 12V/24V/220V  |
| Capacity(freeze room) | 258 Litre     |
| Temperature range     | <= -18 degree |
| Product size(mm)      | 952*668*840   |
| Carton size(mm)       | 990*670*885   |
| Loading qty in 40HQ   | 125           |
| G.W/N.W(KG)           | 54/50         |
| Refrigerant           | R134A/R600a   |




## BD/BC-268

|                       |               |
|-----------------------|---------------|
| Input voltage(V)      | 12V/24V/220V  |
| Capacity(freeze room) | 268 Litre     |
| Temperature range     | <= -18 degree |
| Product size(mm)      | 1030*598*890  |
| Carton size(mm)       | 1170*685*935  |
| Loading qty in 40HQ   | 100           |
| G.W/N.W(KG)           | 46/42         |
| Refrigerant           | R134A/R600a   |



## BD/BC-358

|                       |               |
|-----------------------|---------------|
| Input voltage(V)      | 12V/24V/220V  |
| Capacity(freeze room) | 358 Litre     |
| Temperature range     | <= -18 degree |
| Product size(mm)      | 1278*595*885  |
| Carton size(mm)       | 1370*660*975  |
| Loading qty in 40HQ   | 78            |
| G.W/N.W(KG)           | 56/52         |
| Refrigerant           | R134A/R600a   |

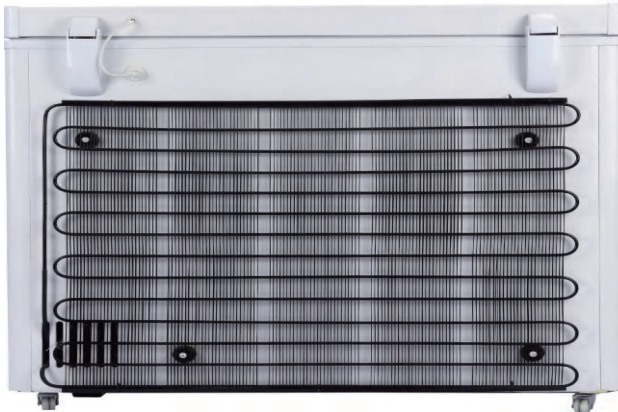

## BD/BC-308

|                       |               |
|-----------------------|---------------|
| Input voltage(V)      | 12V/24V/220V  |
| Capacity(freeze room) | 308 Litre     |
| Temperature range     | <= -18 degree |
| Product size(mm)      | 1110*668*840  |
| Carton size(mm)       | 1148*670*885  |
| Loading qty in 40HQ   | 104           |
| G.W/N.W(KG)           | 65/60         |
| Refrigerant           | R134A/R600a   |



## BD/BC-508

|                       |               |
|-----------------------|---------------|
| Input voltage(V)      | 12V/24V/220V  |
| Capacity(freeze room) | 508 Litre     |
| Temperature range     | <= -18 degree |
| Product size(mm)      | 1525*675*870  |
| Carton size(mm)       | 1580*760*960  |
| Loading qty in 40HQ   | 58            |
| G.W/N.W(KG)           | 72/65         |
| Refrigerant           | R134A/R600a   |

# SOLAR FREEZER

## SOLAR TECH



### BD/BC-558

|                       |               |
|-----------------------|---------------|
| Power consumption     | 155W          |
| Input voltage(w)      | DC24V         |
| capacity              | 558Litre      |
| Product size(mm)      | 1565*765*890  |
| Carton size(mm)       | 1620*850*1010 |
| N.W. /G.W(KG)         | 82/87         |
| Temperature range     | <=-18 degree  |
| Inner glass door      | no            |
| key& lock             | yes           |
| Inner' light          | no            |
| Basket/pcs            | 1             |
| Thermostat            | mechanical    |
| Colour                | white         |
| Defrost               | manual        |
| Compressor/quantities | 1             |
| Doors/quantities      | 2             |
| Loading quantity/40HQ | 28            |

### BD/BC-698

|                       |               |
|-----------------------|---------------|
| Power consumption     | 166W          |
| Input voltage(w)      | DC24V         |
| capacity              | 698 Litre     |
| Product size(mm)      | 1800*765*890  |
| Carton size(mm)       | 1865*860*1020 |
| N.W. /G.W(KG)         | 86/91         |
| Temperature range     | <=-18 degree  |
| Inner glass door      | no            |
| key& lock             | yes           |
| Inner' light          | no            |
| Basket/pcs            | 1             |
| Thermostat            | mechanical    |
| Colour                | white         |
| Defrost               | manual        |
| Compressor/quantities | 1             |
| Doors/quantities      | 2             |
| Loading quantity/40HQ | 28            |

### BD/BC-798

|                       |               |
|-----------------------|---------------|
| Power consumption     | 189W          |
| Input voltage(w)      | DC24V         |
| capacity              | 798Litre      |
| Product size(mm)      | 1965*765*890  |
| Carton size(mm)       | 2030*860*1020 |
| N.W. /G.W(KG)         | 95/100        |
| Temperature range     | <=-18 degree  |
| Inner glass door      | no            |
| key& lock             | yes           |
| Inner' light          | no            |
| Basket/pcs            | 1             |
| Thermostat            | mechanical    |
| Colour                | white         |
| Defrost               | manual        |
| Compressor/quantities | 1             |
| Doors/quantities      | 2             |
| Loading quantity/40HQ | 28            |

### BD/BC-1088

|                       |               |
|-----------------------|---------------|
| Power consumption     | 223W          |
| Input voltage(w)      | DC24V         |
| capacity              | 1088Litre     |
| Product size(mm)      | 2200*900*890  |
| Carton size(mm)       | 2250*990*1020 |
| N.W. /G.W(KG)         | 125/130       |
| Temperature range     | <=-18 degree  |
| Inner glass door      | no            |
| key& lock             | yes           |
| Inner' light          | no            |
| Basket/pcs            | 1             |
| Thermostat            | mechanical    |
| Colour                | white         |
| Defrost               | manual        |
| Compressor/quantities | 2             |
| Doors/quantities      | 2             |
| Loading quantity/40HQ | 24            |

### BD/BC-1388

|                       |               |
|-----------------------|---------------|
| Power consumption     | 255W          |
| Input voltage(w)      | DC24V         |
| capacity              | 1388Litre     |
| Product size(mm)      | 2600*900*890  |
| Carton size(mm)       | 2650*995*1030 |
| N.W. /G.W(KG)         | 150/155       |
| Temperature range     | <=-18 degree  |
| Inner glass door      | no            |
| key& lock             | yes           |
| Inner' light          | no            |
| Basket/pcs            | 1             |
| Thermostat            | mechanical    |
| Colour                | white         |
| Defrost               | manual        |
| Compressor/quantities | 2             |
| Doors/quantities      | 2             |
| Loading quantity/40HQ | 16            |

### BD/BC-1688

|                       |               |
|-----------------------|---------------|
| Power consumption     | 271W          |
| Input voltage(w)      | DC24V         |
| capacity              | 1688Litre     |
| Product size(mm)      | 3100*900*890  |
| Carton size(mm)       | 3150*900*1020 |
| N.W. /G.W(KG)         | 174/180       |
| Temperature range     | <=-18 degree  |
| Inner glass door      | no            |
| key& lock             | yes           |
| Inner' light          | no            |
| Basket/pcs            | 1             |
| Thermostat            | mechanical    |
| Colour                | white         |
| Defrost               | manual        |
| Compressor/quantities | 2             |
| Doors/quantities      | 3             |
| Loading quantity/40HQ | 12            |



# Solar Upright Ice Maker



## BD-198

|                       |                    |
|-----------------------|--------------------|
| Input voltage(V)      | 12V/24V/220V       |
| Capacity(freeze room) | 198 L              |
| Temperature range     | <= -18 for freezer |
| Product size(mm)      | 550*635*1410       |
| Carton size(mm)       | 570*650*1465       |
| Loading qty in 40HQ   | 126                |
| G.W/N.W(KG)           | 52/49              |
| Refrigerant           | R134A/R600a        |

# Solar Display Cooler



## LC-188

|                     |              |
|---------------------|--------------|
| Input voltage(V)    | 12V/24V/220V |
| Capacity            | 188 Liter    |
| Temperature range   | 0-10 degree  |
| Product size(mm)    | 565*555*1445 |
| Carton size(mm)     | 640*630*1500 |
| Loading qty in 40HQ | 82           |
| G.W/N.W(KG)         | 51/46        |
| Refrigerant         | R134A/R600a  |

## LC-218

|                     |              |
|---------------------|--------------|
| Input voltage(V)    | 12V/24V/220V |
| Capacity            | 218 Liter    |
| Temperature range   | 0-10 degree  |
| Product size(mm)    | 565*555*1655 |
| Carton size(mm)     | 640*630*1710 |
| Loading qty in 40HQ | 82           |
| G.W/N.W(KG)         | 58/53        |
| Refrigerant         | R134A/R600a  |

## LC-268

|                     |              |
|---------------------|--------------|
| Input voltage(V)    | 12V/24V/220V |
| Capacity            | 268 Liter    |
| Temperature range   | 0-10 degree  |
| Product size(mm)    | 565*555*1765 |
| Carton size(mm)     | 640*630*1820 |
| Loading qty in 40HQ | 76           |
| G.W/N.W(KG)         | 61/55        |
| Refrigerant         | R134A/R600a  |

## LC-300

|                     |              |
|---------------------|--------------|
| Input voltage(V)    | 12V/24V/220V |
| Capacity            | 300 Liter    |
| Temperature range   | 0-10 degree  |
| Product size(mm)    | 565*555*1955 |
| Carton size(mm)     | 640*630*2010 |
| Loading qty in 40HQ | 76           |
| G.W/N.W(KG)         | 65/59        |
| Refrigerant         | R134A/R600a  |



# Curved Glass Door Chest Freezer



## SD/SC-168Y

|                            |               |
|----------------------------|---------------|
| Capacity (litre)           | 168           |
| Temp Control               | mechanical    |
| Voltage 24v                | 24V/220V      |
| Basket                     | one           |
| Isolation Thickness        | 85mm          |
| Refrigerant                | R134a         |
| Wheel                      | 4             |
| Color of Door Frame        | white         |
| Key and Lock               | Yes           |
| Glass                      | 4mm           |
| Outside Condenser          | Yes           |
| Paper sticker              | Optional      |
| Fan cooling Compressor     | Yes           |
| Unit Dimension(W*D*H)MM    | 730*700*826MM |
| Packing Dimension(W*D*H)MM | 785*755*882MM |
| Temperature                | ≤ -18 ℃       |
| Qty/40HQ                   | 132           |

## SD/SC-268Y

|                            |                |
|----------------------------|----------------|
| Capacity (litre)           | 268            |
| Temp Control               | mechanical     |
| Voltage 24v                | 24V/220V       |
| Basket                     | one            |
| Isolation Thickness        | 85mm           |
| Refrigerant                | R134a          |
| Wheel                      | 4              |
| Color of Door Frame        | white          |
| Key and Lock               | Yes            |
| Glass                      | 4mm            |
| Outside Condenser          | Yes            |
| Paper sticker              | Optional       |
| Fan cooling Compressor     | Yes            |
| Unit Dimension(W*D*H)MM    | 1041*700*840MM |
| Packing Dimension(W*D*H)MM | 1096*755*882MM |
| Temperature                | ≤ -18 ℃        |
| Qty/40HQ                   | 94             |

## SD/SC-308Y

|                            |                |
|----------------------------|----------------|
| Capacity (litre)           | 308            |
| Temp Control               | mechanical     |
| Voltage 24v                | 24V/220V       |
| Basket                     | one            |
| Isolation Thickness        | 85mm           |
| Refrigerant                | R290           |
| Wheel                      | 4              |
| Color of Door Frame        | white          |
| Key and Lock               | Yes            |
| Glass                      | 4mm            |
| Outside Condenser          | Yes            |
| Paper sticker              | Optional       |
| Fan cooling Compressor     | Yes            |
| Unit Dimension(W*D*H)MM    | 1250*700*840MM |
| Packing Dimension(W*D*H)MM | 1305*755*882MM |
| Temperature                | ≤ -18 ℃        |
| Qty/40HQ                   | 81             |



## SD/SC-368Y

|                            |                |
|----------------------------|----------------|
| Capacity (litre)           | 368            |
| Temp Control               | mechanical     |
| Voltage 24v                | 24V/220V       |
| Basket                     | one            |
| Isolation Thickness        | 85mm           |
| Refrigerant                | R290           |
| Wheel                      | 4              |
| Color of Door Frame        | white          |
| Key and Lock               | Yes            |
| Glass                      | 4mm            |
| Outside Condenser          | Yes            |
| Paper sticker              | Optional       |
| Fan cooling Compressor     | Yes            |
| Unit Dimension(W*D*H)MM    | 1410*700*840MM |
| Packing Dimension(W*D*H)MM | 1465*755*882MM |
| Temperature                | ≤-18℃          |
| Qty/40HQ                   | 72             |

## SD/SC-408Y

|                            |                |
|----------------------------|----------------|
| Capacity (litre)           | 408            |
| Temp Control               | mechanical     |
| Voltage 24v                | 220V50Hz       |
| Basket                     | one            |
| Isolation Thickness        | 85mm           |
| Refrigerant                | R290           |
| Wheel                      | 4              |
| Color of Door Frame        | white          |
| Key and Lock               | Yes            |
| Glass                      | 4mm            |
| Outside Condenser          | Yes            |
| Paper sticker              | Optional       |
| Fan cooling Compressor     | Yes            |
| Unit Dimension(W*D*H)MM    | 1520*700*840MM |
| Packing Dimension(W*D*H)MM | 1575*755*882MM |
| Temperature                | ≤-18℃          |
| Qty/40HQ                   | 66             |

## SD/SC-468Y

|                            |                |
|----------------------------|----------------|
| Capacity (litre)           | 468            |
| Temp Control               | mechanical     |
| Voltage 24v                | 220V50Hz       |
| Basket                     | one            |
| Isolation Thickness        | 85mm           |
| Refrigerant                | R290           |
| Wheel                      | 4              |
| Color of Door Frame        | white          |
| Key and Lock               | Yes            |
| Glass                      | 4mm            |
| Outside Condenser          | Yes            |
| Paper sticker              | Optional       |
| Fan cooling Compressor     | Yes            |
| Unit Dimension(W*D*H)MM    | 1630*700*840MM |
| Packing Dimension(W*D*H)MM | 1685*755*882MM |
| Temperature                | ≤-18℃          |
| Qty/40HQ                   | 63             |

## SD/SC-508Y

|                            |                |
|----------------------------|----------------|
| Capacity (litre)           | 508            |
| Temp Control               | mechanical     |
| Voltage 24v                | 220V50Hz       |
| Basket                     | one            |
| Isolation Thickness        | 85mm           |
| Refrigerant                | R290           |
| Wheel                      | 4              |
| Color of Door Frame        | white          |
| Key and Lock               | Yes            |
| Glass                      | 4mm            |
| Outside Condenser          | Yes            |
| Paper sticker              | Optional       |
| Fan cooling Compressor     | Yes            |
| Unit Dimension(W*D*H)MM    | 1780*700*840MM |
| Packing Dimension(W*D*H)MM | 1935*755*882MM |
| Temperature                | ≤-18℃          |
| Qty/40HQ                   | 57             |

# 110mm Thickness Foaming Solar Freezer







## BD/BC-108H

|                       |              |
|-----------------------|--------------|
| Power consumption     | 47W          |
| Input voltage(w)      | DC12V/24V    |
| capacity              | 108 Litre    |
| Product size(mm)      | 670*661*840  |
| Carton size(mm)       | 710*681*882  |
| N.W. /G.W(KG)         | 39/43        |
| Temperature range     | <=-18 degree |
| Inner glass door      | yes          |
| key& lock             | yes          |
| Inner' light          | yes          |
| Basket/pcs            | 1            |
| Thermostat            | mechanical   |
| Colour                | white        |
| Defrost               | manual       |
| Compressor/quantities | 1            |
| Doors/quantities      | 1            |
| Loading quantity/40HQ | 153          |

## BD/BC-158H

|                       |              |
|-----------------------|--------------|
| Power consumption     | 49W          |
| Input voltage(w)      | DC12V/24V    |
| capacity              | 158 Litre    |
| Product size(mm)      | 840*661*840  |
| Carton size(mm)       | 880*681*882  |
| N.W. /G.W(KG)         | 42/46        |
| Temperature range     | <=-18 degree |
| Inner glass door      | yes          |
| key& lock             | yes          |
| Inner' light          | yes          |
| Basket/pcs            | 1            |
| Thermostat            | mechanical   |
| Colour                | white        |
| Defrost               | manual       |
| Compressor/quantities | 1            |
| Doors/quantities      | 1            |
| Loading quantity/40HQ | 132          |



## BD/BC-358H

|                       |              |
|-----------------------|--------------|
| Power consumption     | 105W         |
| Input voltage(w)      | DC12V/24V    |
| capacity              | 358 Litre    |
| Product size(mm)      | 1380*745*840 |
| Carton size(mm)       | 1420*765*882 |
| N.W. /G.W(KG)         | 78/84        |
| Temperature range     | <=-18 degree |
| Inner glass door      | yes          |
| key& lock             | yes          |
| Inner' light          | yes          |
| Basket/pcs            | 1            |
| Thermostat            | mechanical   |
| Colour                | white        |
| Defrost               | manual       |
| Compressor/quantities | 1            |
| Doors/quantities      | 1            |
| Loading quantity/40HQ | 66           |

## BD/BC-208H

|                       |              |
|-----------------------|--------------|
| Power consumption     | 68W          |
| Input voltage(w)      | DC12V/24V    |
| capacity              | 208 Litre    |
| Product size(mm)      | 996*661*840  |
| Carton size(mm)       | 1036*681*882 |
| N.W. /G.W(KG)         | 49/53        |
| Temperature range     | <=-18 degree |
| Inner glass door      | yes          |
| key& lock             | yes          |
| Inner' light          | yes          |
| Basket/pcs            | 1            |
| Thermostat            | mechanical   |
| Colour                | white        |
| Defrost               | manual       |
| Compressor/quantities | 1            |
| Doors/quantities      | 1            |
| Loading quantity/40HQ | 123          |

## BD/BC-258H

|                       |              |
|-----------------------|--------------|
| Power consumption     | 78W          |
| Input voltage(w)      | DC12V/24V    |
| capacity              | 258 Litre    |
| Product size(mm)      | 1038*745*840 |
| Carton size(mm)       | 1078*765*882 |
| N.W. /G.W(KG)         | 60/65        |
| Temperature range     | <=-18 degree |
| Inner glass door      | yes          |
| key& lock             | yes          |
| Inner' light          | yes          |
| Basket/pcs            | 1            |
| Thermostat            | mechanical   |
| Colour                | white        |
| Defrost               | manual       |
| Compressor/quantities | 1            |
| Doors/quantities      | 1            |
| Loading quantity/40HQ | 99           |

## BD/BC-308H

|                       |              |
|-----------------------|--------------|
| Power consumption     | 95W          |
| Input voltage(w)      | DC12V/24V    |
| capacity              | 308 Litre    |
| Product size(mm)      | 1196*745*840 |
| Carton size(mm)       | 1236*765*882 |
| N.W. /G.W(KG)         | 73/79        |
| Temperature range     | <=-18 degree |
| Inner glass door      | yes          |
| key& lock             | yes          |
| Inner' light          | yes          |
| Basket/pcs            | 1            |
| Thermostat            | mechanical   |
| Colour                | white        |
| Defrost               | manual       |
| Compressor/quantities | 1            |
| Doors/quantities      | 1            |
| Loading quantity/40HQ | 90           |

## BD/BC-408H

|                       |              |
|-----------------------|--------------|
| Power consumption     | 110W         |
| Input voltage(w)      | DC12V/24V    |
| capacity              | 408 Litre    |
| Product size(mm)      | 1566*806*840 |
| Carton size(mm)       | 1606*815*882 |
| N.W. /G.W(KG)         | 83/88        |
| Temperature range     | <=-18 degree |
| Inner glass door      | yes          |
| key& lock             | yes          |
| Inner' light          | yes          |
| Basket/pcs            | 1            |
| Thermostat            | mechanical   |
| Colour                | white        |
| Defrost               | manual       |
| Compressor/quantities | 1            |
| Doors/quantities      | 1            |
| Loading quantity/40HQ | 52           |

## BD/BC-458H

|                       |              |
|-----------------------|--------------|
| Power consumption     | 135W         |
| Input voltage(w)      | DC12V/24V    |
| capacity              | 458 Litre    |
| Product size(mm)      | 1676*806*840 |
| Carton size(mm)       | 1716*815*882 |
| N.W. /G.W(KG)         | 91/97        |
| Temperature range     | <=-18 degree |
| Inner glass door      | yes          |
| key& lock             | yes          |
| Inner' light          | yes          |
| Basket/pcs            | 1            |
| Thermostat            | mechanical   |
| Colour                | white        |
| Defrost               | manual       |
| Compressor/quantities | 1            |
| Doors/quantities      | 1            |
| Loading quantity/40HQ | 52           |

## BD/BC-508H

|                       |              |
|-----------------------|--------------|
| Power consumption     | 157W         |
| Input voltage(w)      | DC12V/24V    |
| capacity              | 508 Litre    |
| Product size(mm)      | 1826*806*840 |
| Carton size(mm)       | 1866*815*882 |
| N.W. /G.W(KG)         | 103/109      |
| Temperature range     | <=-18 degree |
| Inner glass door      | yes          |
| key& lock             | yes          |
| Inner' light          | yes          |
| Basket/pcs            | 1            |
| Thermostat            | mechanical   |
| Colour                | white        |
| Defrost               | manual       |
| Compressor/quantities | 1            |
| Doors/quantities      | 1            |
| Loading quantity/40HQ | 52           |

# Fridge



## BC-90

|                               |                                    |
|-------------------------------|------------------------------------|
| Model:                        | BC-90                              |
| Capacity:                     | 90 Litre                           |
| Freezer Capacity              | 0L                                 |
| Unit Size(WxDxH):             | 485*515*845mm                      |
| Carton Size(WxDxH):           | 530*560*885mm                      |
| Input voltage                 | DC 12V/24V                         |
| *climate classification:      | N,ST                               |
| N.W./G.W.:                    | 23/25kgs                           |
| Temperature range             | 0-10 for fridge ,<= -2 for cabinet |
| Rated Power                   | 49W                                |
| The price for DC refrigerator |                                    |

## BCD-98

|                               |                                     |
|-------------------------------|-------------------------------------|
| Model:                        | BCD-98                              |
| Capacity:                     | 98 Litre                            |
| Freezer Capacity              | 28L                                 |
| Unit Size(WxDxH):             | 480*445*845mm                       |
| Carton Size(WxDxH):           | 500*465*870mm                       |
| Input voltage                 | DC 12V/24V                          |
| *climate classification:      | N,ST                                |
| N.W./G.W.:                    | 25/27 kgs                           |
| Temperature range             | 0-10 for fridge ,<= -18 for freezer |
| Rated Power                   | 55W                                 |
| The price for DC refrigerator |                                     |

## BCD-108

|                               |                                     |
|-------------------------------|-------------------------------------|
| Model:                        | BCD-108                             |
| Capacity:                     | 108 Litre                           |
| Freezer Capacity              | 41 L                                |
| Unit Size(WxDxH):             | 450*460*1250mm                      |
| Carton Size(WxDxH):           | 465*480*1305mm                      |
| Input voltage                 | DC 12V/24V                          |
| *climate classification:      | N,ST                                |
| N.W./G.W.:                    | 28/31 kgs                           |
| Temperature range             | 0-10 for fridge ,<= -18 for freezer |
| Rated Power                   | 65W                                 |
| The price for DC refrigerator |                                     |





# 100% Solar Powered Air Conditioner

# Solar Air Conditioner Power System

## KF-26GWS

|                                |                            |
|--------------------------------|----------------------------|
| Cooling Capacity               | 2600W / 0.75ton / 9000BTU  |
| Input Power(W) -Cooling        | 650~720                    |
| Input voltage(V)               | DC24V                      |
| Rated Currrent(A)-Cooling      | 13.5~15                    |
| Noise-Indoor-dB(A)             | ≤39                        |
| Noise-Outdoor-dB(A)            | ≤49                        |
| Air Circulation(M3/H)          | 470                        |
| Suitable Area(M2)              | 11~18                      |
| EER-W/W                        | 3.84                       |
| EER-Btu/h/w                    | 13.53                      |
| Connecting line specifications | 5*1.5mm <sup>2</sup> *3.6m |
| Power line specifications      | 3*4mm <sup>2</sup>         |
| Indoor Unit-Net/Gross(KGS)     | 11/14                      |
| Outdoor Unit-Net/Gross(KGS)    | 33/38                      |
| Indoor Unit-Net(mm)            | 745*255*195                |
| Indoor Unit-Shipping(mm)       | 780*240*305                |
| Outdoor Unit-Net(mm)           | 645*245*495                |
| Outdoor Unit-Shipping(mm)      | 725*320*540                |

## KF-35GWS

|                                |                            |
|--------------------------------|----------------------------|
| Cooling Capacity               | 3500W / 1ton / 12000BTU    |
| Input Power(W) -Cooling        | 800~950                    |
| Input voltage(V)               | DC48V                      |
| Rated Currrent(A)-Cooling      | 16.7~19.1                  |
| Noise-Indoor-dB(A)             | ≤43                        |
| Noise-Outdoor-dB(A)            | ≤52                        |
| Air Circulation(M3/H)          | 570                        |
| Suitable Area(M2)              | 16~28                      |
| EER-W/W                        | 4.23                       |
| EER-Btu/h/w                    | 14.08                      |
| Connecting line specifications | 5*1.5mm <sup>2</sup> *3.6m |
| Power line specifications      | 3*4mm <sup>2</sup>         |
| Indoor Unit-Net/Gross(KGS)     | 12/15                      |
| Outdoor Unit-Net/Gross(KGS)    | 35/40                      |
| Indoor Unit-Net(mm)            | 775*260*210                |
| Indoor Unit-Shipping(mm)       | 840*325*265                |
| Outdoor Unit-Net(mm)           | 790*260*540                |
| Outdoor Unit-Shipping(mm)      | 910*370*610                |

## KF-50GWS

|                                |                            |
|--------------------------------|----------------------------|
| Cooling Capacity               | 5000W / 1.5ton / 18000BTU  |
| Input Power(W) -Cooling        | 890~1000                   |
| Input voltage(V)               | DC48V                      |
| Rated Currrent(A)-Cooling      | 18.36~22.1                 |
| Noise-Indoor-dB(A)             | ≤43                        |
| Noise-Outdoor-dB(A)            | ≤52                        |
| Air Circulation(M3/H)          | 1000                       |
| Suitable Area(M2)              | 25~35                      |
| EER-W/W                        | 5.38                       |
| EER-Btu/h/w                    | 14.13                      |
| Connecting line specifications | 5*1.5mm <sup>2</sup> *3.6m |
| Power line specifications      | 3*4mm <sup>2</sup>         |
| Indoor Unit-Net/Gross(KGS)     | 16.3/19.2                  |
| Outdoor Unit-Net/Gross(KGS)    | 63/67                      |
| Indoor Unit-Net(mm)            | 1070*385*265               |
| Indoor Unit-Shipping(mm)       | 1100*400*285               |
| Outdoor Unit-Net(mm)           | 850X290X580                |
| Outdoor Unit-Shipping(mm)      | 995*390*650                |

## KF-70GWS

|                                |                            |
|--------------------------------|----------------------------|
| Cooling Capacity               | 7000W / 2ton / 24000BTU    |
| Input Power(W) -Cooling        | 1258~1325                  |
| Input voltage(V)               | DC48V                      |
| Rated Currrent(A)-Cooling      | 24.92~26.89                |
| Noise-Indoor-dB(A)             | ≤43                        |
| Noise-Outdoor-dB(A)            | ≤52                        |
| Air Circulation(M3/H)          | 1200                       |
| Suitable Area(M2)              | 35~45                      |
| EER-W/W                        | 5.66                       |
| EER-Btu/h/w                    | 14.37                      |
| Connecting line specifications | 5*1.5mm <sup>2</sup> *3.6m |
| Power line specifications      | 3*4mm <sup>2</sup>         |
| Indoor Unit-Net/Gross(KGS)     | 20/22                      |
| Outdoor Unit-Net/Gross(KGS)    | 71/77                      |
| Indoor Unit-Net(mm)            | 1070*385*265               |
| Indoor Unit-Shipping(mm)       | 1100*400*285               |
| Outdoor Unit-Net(mm)           | 850X290X580                |
| Outdoor Unit-Shipping(mm)      | 995*390*650                |

