

LED SPECIFITION RTL **series**

RTL led bulb light feature

challenge the limit to save power




Component characteristics

 supper long life,Non-UV and energy saving

 Amazing design with aluminum inside,high quality plastic outside

 Green and Eco-friendly

 Safe and well heat dissipation

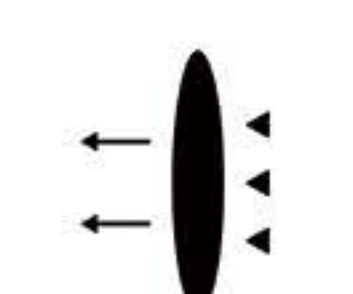 PC cover light transmittance is above 90%



MODEL NO.	RTL03	RTL05	RTL07	RTL09	RTL12	RTL15
VOLTAGE	AC: 220-240V					
BEAM ANGLE	270					
LED TYPE	SMD2835					
Ra	>80					
LUMEN	240LM	400LM	560LM	720LM	840LM	1050LM
COLOR TEMPERATURE	6500K					
MATERIAL	Heart conductive plastic+Aluminum					
DIMENSON	110(L)*60(D)MM			120(L)*60(D)MM		

LED SPECIFITION RTL series

RTL led bulb light feature

challenge the limit to save power



More save
electricity



Longer
service life



More
Secure



More
reduction



Component characteristics




supper long life,Non-UV and energy saving



Safe and well heat dissipation



Amazing design with aluminum inside,high quality plastic outside



PC cover light transmittance is above 90%



Green and Eco-friendly

MODEL NO.	RTL03	RTL05	RTL07	RTL09	RTL12	RTL15
VOLTAGE	AC: 220-240V					
BEAM ANGLE	270					
LED TYPE	SMD2835					
Ra	>80					
LUMEN	240LM	400LM	560LM	720LM	840LM	1050LM
COLOR TEMPERATURE	6500K					
MATERIAL	Heart conductive plastic+Aluminum					
DIMENSON	110(L)*60(D)MM			120(L)*60(D)MM		

FACTORY ADDRESS

A:NO.30 Yongshun Road,Zhulin Town,Jintan District,Changzhou.Jiangsu Province,China

T:+86 0512-66292101
FAX:+86 0512-66292101

E:info@restarsolar.com