

RT6S-M

70 Cells

Mono 5*14,182*130mm

340-400W


Power output

20.61%


The Highest Efficiency

0~+5W

Tolerance

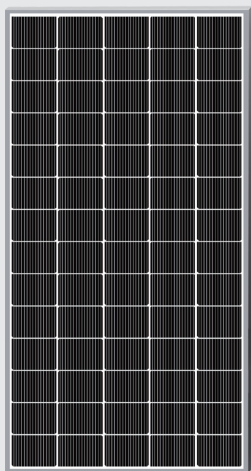

0.42% Annual Degradation over 30 years

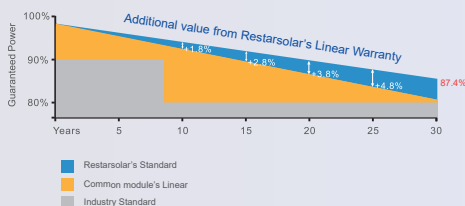

LINEAR PERFORMANCE WARRANTY

15 Year Product Warranty

30 Year Linear Power Warranty



WWW.RESTARSOLAR.COM

RT6S-M

RT8H-M HALF-CELL series is produced with high efficiency multi-busbar cells, which can reduce the module internal power loss to improve its conversion efficiency, as well as lower the failure risk caused by cracks and broken busbar to enhance the module reliability. Combined with half-cell technology, the module is highly resistant to hot-spot crisis caused by shadow effect.



High Reliability

Multi-busbar technology can effectively reduce the reliability risk caused by cells cracks and broken busbar.



Anti-PID Resistance

Prominent anti-PID performance reduces the power degradation, leading to higher energy yield and lower LCOE.



Durability Against Extreme Conditions

Certified to resist high salt mist and ammonia conditions.



High Efficiency

Multi-busbar technology can reduce the module internal power loss to improve the module conversion efficiency significantly.



Low-Light Performance

With high transmittance and anti-reflective 3.2mm tempered glass, the module has stronger performance under low light circumstances.



High Mechanical Strength



Certified to withstand: high wind load(2400Pa) and snow load(5400Pa).

Full range of products and certification systems

ISO 9001/14001 TUV PID-FREE CE IEC 61215/61730/61701/62716



Dimension of PV Modules Unit:mm

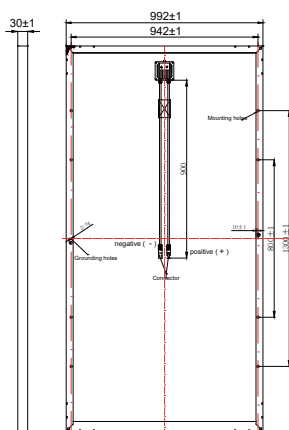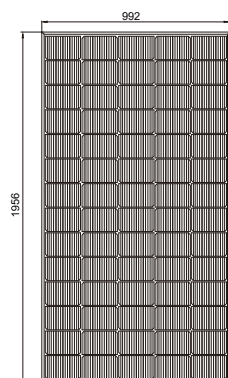

ELECTRICAL DATA(STC)

Rated Power in Watts-Pmax(Wp)	340	350	360	370	380	390	400
Open Circuit Voltage-Voc(V)	47.75	47.95	48.15	48.35	48.55	48.75	48.95
Short Circuit Current-Isc(A)	9.24	9.44	9.63	9.82	10.01	10.19	10.37
Maximum Power Voltage-Vmp(V)	39.10	39.30	39.49	39.70	39.89	41.10	41.29
Maximum Power Current-Imp(A)	8.70	8.91	9.12	9.32	9.53	9.49	9.69
Module Efficiency	17.52%	18.04%	18.55%	19.07%	19.58%	20.10%	20.61%

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

ELECTRICAL DATA(NOCT)

Maximum Power-Pmax(Wp)	253.77	261.22	268.67	276.02	283.59	290.97	298.47
Open Circuit Voltage-Voc (V)	44.74	44.93	45.12	45.30	45.49	45.68	45.87
Short Circuit Current-Isc(A)	7.47	7.63	7.78	7.93	8.09	8.23	8.38
Maximum Power Voltage-Vmp(V)	36.42	36.60	36.78	36.97	37.15	38.28	38.45
Maximum Power Current-Imp(A)	6.97	7.14	7.31	7.47	7.63	7.60	7.76

NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

MECHANICAL DATA

Solar Cells	Mono-crystalline 182 x 130mm, 14/16 Bus bars
Cell Configuration	70 cells (5x14)
Module Dimensions	1956 x 992 x 30mm
Weight	21.3 KGS
Front Cover	3.2mm Tempered Glass
Frame Material	Anodized Aluminum Alloy
J-Box	IP67
Cable	4mm ² (IEC)/12AWG(UL),900mm
Connectors	MC4 or MC4 Comparable


TEMPERATURE & MAXIMUM RATINGS

Nominal Operating Cell Temperature(NOCT)	45°C±2°C
Temperature Coefficient of Voc	-0.32%/°C
Temperature Coefficient of Isc	0.05%/°C
Temperature Coefficient of Pmax	-0.39%/°C
Operational Temperature	-40~+85°C
Maximum System Voltage	1500V(IEC)/1500V(UL)
Max Series Fuse Rating	20A
Limiting Reverse Current	20A

PACKAGING CONFIGURATION

Number of modules per container	936 pcs/40HQ
Package	78 pcs/pallet
Package Number	12 pallets

I-V characteristics at different irradiances

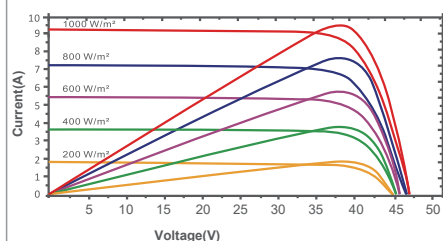

I-V characteristics at different temperature

