

RTM200-230M

33 Cells 12/18BB

Mono-crystalline, 210*132mm

230W

Power output

22.51%


The Highest Efficiency

±3%

Tolerance



**0.5% Annual Degradation
over 30 years**

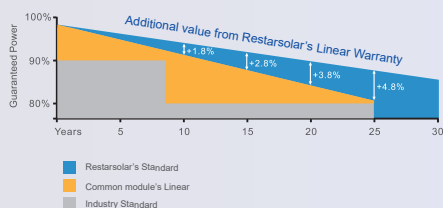

LINEAR PERFORMANCE WARRANTY

12 Year Product Warranty

30 Year Linear Power Warranty



WWW.RESTARSOLAR.COM

RTM200-230M FULL BLACK

RTMXXXM is a robust solar module with 33 solar cells. These modules can be used for on-grid solar applications. Our meticulous design and production techniques ensure a high-yield, long-term performance for every module produced. Our rigorous quality control and in-house testing facilities guarantee Restarsolar's modules meet the highest quality standards possible.



High module conversion efficiency (up to 22.51%), through superior manufacturing technology



Guaranteed ±3% power output tolerance ensures high reliability



Anti-reflective, hydrophobic coating improves light absorption and reduces surface dust



Excellent performance under low light environments (mornings, evenings and cloudy days)





Suitable for harsh environments, such as coasts, deserts and lakes. Withstand high level of wind loads (2400pa) and snow loads (5400pa)

Full range of products and certification systems

ISO 9001 TUV PID-FREE CE IEC61215/61730/61701/62716



Dimension of PV Modules Unit: mm

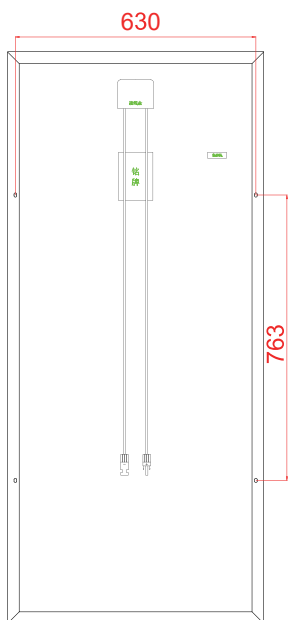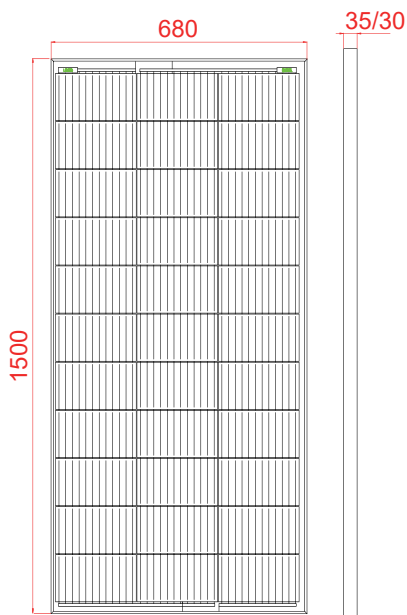

ELECTRICAL DATA(STC)

Rated Power in Watts-Pmax(Wp)	200	210	220	230
Open Circuit Voltage-Voc(V)	22.55	22.85	23.15	23.45
Short Circuit Current-Isc(A)	11.45	11.79	12.14	12.47
Maximum Power Voltage-Vmp(V)	18.86	19.01	19.15	19.30
Maximum Power Current-Imp(A)	10.61	11.05	11.49	11.92
Module Efficiency (%)	19.57%	20.55%	21.53%	22.51%

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

ELECTRICAL DATA(NOCT)

Maximum Power-Pmax (Wp)	149.28	156.71	164.14	171.62
Open Circuit Voltage-Voc (V)	21.13	21.41	21.69	21.97
Short Circuit Current-Isc (A)	9.25	9.53	9.81	10.08
Maximum Power Voltage-Vmp(V)	17.56	17.70	17.84	17.97
Maximum Power Current-Imp(A)	8.50	8.85	9.20	9.55

NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s.

MECHANICAL DATA

Solar cells	Mono-crystalline 210*132mm, 12/18 Bus bars
Cell configuration	33cells(3*11)
Module dimensions	1500*680*35/30mm
Weight	11.2/10.7kg
Front Cover	3.2mm Tempered Glass
J-BOX	IP67 or IP68, 3 Diodes
Cable	4mm ² (IEC)/12AWG(UL), 900mm
Connectors	MC4 or MC4 Compatible
Standard Packaging	2pcs/carton

TEMPERATURE & MAXIMUM RATINGS

Nominal Operating Cell Temperature (NOCT)	45°C ±2°C
Temperature Coefficient of Voc	-0.32%/°C
Temperature Coefficient of Isc	0.05%/°C
Temperature Coefficient of Pmax	-0.35%/°C
Operational Temperature	-40~+85°C
Maximum System Voltage	1500V(IEC)
Max Series Fuse Rating	15A
Limiting Reverse Current	15A

PACKAGING CONFIGURATION

2pcs/carton
750cartons/40HQ=1500pcs