

Supplementary Information

Repeatable station terms redistribute long-period response spectra across Japanese strong-motion sites

Haoyu Zhou and Qiang Ma

Supplementary Methods

Record selection and direct periods

The public J-SHIS/NIED `sub1-v2024` flatfile contains 333,808 K-NET and KiK-net records[1, 2]. The download page defines the subset by magnitude of at least 5 and shortest fault distance no greater than 300 km. All records in the archive have JMA magnitude $M_{\text{JMA}} \geq 5$; F-net M_w is stored separately. Its site table codes ground-surface installations as 1 and borehole installations as 2. We retain code 1 for the residual model and response-spectrum propagation. Of 231,380 surface records, 8,675 lack finite F-net M_w and 41 additional records have nonpositive AVS30. The remaining 222,664 records have positive distance, supported MF2013 source classes and finite model predictions at all eight periods.

MF2013 uses RotD100, the maximum norm of two horizontal oscillator responses[3]. RotD100 spectral acceleration is read directly at 0.1, 0.2, 0.3, 0.5, 1.0, 2.0, 3.0 and 5.0 s. Every retained record has a positive value at each period, so the final count remains 222,664 throughout. No response coordinate is copied or interpolated.

RotD50 residuals are decomposed on the identical sample as a response-component sensitivity. The RotD50 and RotD100 fields are compared station by station, and record-level RotD50/RotD100 ratios quantify the change in absolute coordinate. Zhao 2006 uses RotD50 because OpenQuake defines the model for the geometric mean of two horizontal components and the flatfile does not provide that exact response coordinate.

Residual model boundary

The primary prediction contains the MF2013 magnitude-distance backbone and the published D1400 and AVS30 terms[4, 5]. D1400 is the depth to the 1.4 km s⁻¹ shear-wave velocity horizon. AVS30 is the average shear-wave velocity in the upper 30 m. The anomalous-intensity sensitivity uses the public northeastern and southwestern geographic and depth rules[6]. Incomplete plate-membership metadata restrict this term to a sensitivity calculation. The Philippine Sea Plate term is constant across stations for a qualifying event at a given period and is absorbed by the event fixed effect. The fitted global intercept is retained as a model offset; formal assessment of MF2013 calibration lies outside this design.

Fixed effect decomposition

For residual r_{ij} at station i during event j , the additive model is

$$r_{ij} = \mu + \delta E_j + \delta S_i + \epsilon_{ij}. \quad (1)$$

Alternating grouped least squares estimates δE_j and δS_i . Record-count-weighted event and station means are constrained to zero, so μ contains the global offset. Iteration stops when the largest parameter change falls below $10^{-10} \log_{10}$ units. All 24 period-model combinations converge; the largest final change is 9.99×10^{-11} and the largest iteration count is 1,161.

Event group repeatability

The 1,737 usable earthquakes are assigned to five groups with a fixed random seed. The same partition is used at every period and for both ground-motion backbones. Each fold fits the two-way event-station decomposition separately to four training groups and the held-out group. Paired train and test station

vectors are centred with their respective record counts. A station requires at least 15 training records and five test records. The comparison uses the train-test station correlation and the test-record-weighted root mean squared error relative to a zero station term. Each fold contains 347 or 348 test events, and every training and test decomposition converges below $10^{-10} \log_{10}$ units.

Spatial prediction

Five spatial blocks are produced by k -means clustering of standardised longitude and latitude. The site-only model uses shallow-velocity averages, sedimentary-depth variables, elevation, sensor depth and network. The site-and-location model adds station coordinates and two volcanic-front distances. Both histogram gradient-boosting models use fixed hyperparameters: learning rate 0.04, 400 iterations, 15 maximum leaf nodes, 35 minimum samples per leaf and L2 regularisation 0.1. Numeric variables are median-imputed within training folds; network is mode-imputed and one-hot encoded. Predictions are generated only for the held-out block and are centred to a record-weighted zero mean before spectrum propagation. A separate complexity sensitivity changes maximum leaf nodes to 7 or 31, minimum samples per leaf to 70, L2 regularisation to 1.0, or the iteration budget to 200. Each setting retains the same folds, preprocessing, weights and random seed, and no alternative is selected as a replacement for the primary model.

MF2013 applicability sensitivity

The MF2013 regression analysis selected $M_w \geq 5.5$ ground-surface records with two horizontal components, at least five triggered stations per event and source distance below 200 km[4]. It also truncated records beyond the magnitude-dependent distance where the Kanno et al. median PGA fell below 10 cm s^{-2} [7]. We reconstruct the base-model equations

$$\log_{10} \text{PGA} = aM_w + bX - \log_{10} (X + d10^{0.5M_w}) + c, \quad (2)$$

with PGA in cm s^{-2} and source distance X in km. The coefficients are

$$\begin{aligned} (a, b, c, d) &= (0.556, -0.003070, 0.2560, 0.00547), & H \leq 30 \text{ km}, \\ (a, b, c, d) &= (0.409, -0.00389, 1.5600, 0), & H > 30 \text{ km}. \end{aligned}$$

The Kanno station-amplification term is excluded because MF2013 applies this screen as a magnitude-distance boundary. The relation is evaluated at each record distance after the M_w and 200 km screens. Events with fewer than five remaining stations are then removed. The resulting sample contains 35,857 records from 411 earthquakes, including 578 stations with at least 20 records. Residual decomposition, event holdout, spatial prediction and spectrum propagation are repeated without changing the remaining settings.

KiK-net paired-sensor validation

Ground-surface and borehole rows at a KiK-net site are paired by earthquake and site code. The pairing is one-to-one and yields 102,428 positive RotD100 pairs at every analysed period, spanning 699 sites and 1,410 earthquakes. A site's transfer proxy is the median $\log_{10}$ surface-to-borehole ratio. Pearson, Spearman and record-count-weighted correlations compare this proxy with the primary station term. A depth-adjusted Pearson correlation first removes separate linear trends with log borehole depth from both variables.

The primary five-group event partition supplies a held-event test. For each fold, station terms are fitted separately to training and held-out surface records. Training-event transfer ratios are calibrated to training-event station terms by weighted linear regression, then used to predict held-out station terms. The prediction never uses a paired ratio from a held-out earthquake. Stations require at least 15 training pairs and five held-out surface records. Transfer repeatability compares median ratios formed independently from the training and held-out earthquakes.

The spectral-shape calculation retains stations represented at all eight periods. Separate station and period means are removed from the station-term and transfer-ratio matrices. This isolates station-specific

frequency dependence from average amplification and the network-wide response curve. Cluster-bootstrap intervals resample complete station spectra. In each held-event fold, the transfer spectrum is estimated from four event groups and the station-term spectrum from the fifth, followed by separate two-way centring within that fold.

Alternative ground-motion-model calculation

We evaluate the Zhao et al. 2006 active-crustal, interface and intraslab equations with OpenQuake Engine 3.25.1[8, 9]. The flatfile source class selects the equation branch. Moment magnitude, hypocentral depth and crustal rake are read from the source table; documented shortest fault distance is supplied as rupture distance, and AVS30 is supplied as VS30. RotD50 is used as the closest orientation-independent coordinate to the model’s geometric-mean target. The same surface observations, periods, station threshold, event folds and spatial folds are used for the MF2013 and Zhao calculations. This changes the ground-motion backbone while retaining the data and validation design.

Transfer and event-influence tests

The first cross-network stress test trains on K-NET and evaluates KiK-net, then reverses the direction. A common-feature model removes VS20, VS30 and network identity because these fields have different completeness in the two networks. It retains VS10, AVS30, sedimentary depths, elevation, sensor depth, coordinates and volcanic-front distances.

A stricter test separates both network and earthquake sample. We retain 1,286 earthquakes with at least five records in each network and assign them to five fixed groups. K-NET station terms from four groups train models with fixed primary hyperparameters; KiK-net station terms are estimated only from the fifth group. Physical models contain no network indicator. Source stations require 15 training records and targets require five held-event records. Predictions are centred by the source-network training predictions without target recentering. The reverse direction uses the same groups and settings. Target-station bootstrap intervals use 2,000 replicates.

The chronological test retains 1,277 of these earthquakes with finite origin times and orders them before any station-term estimation. Fixed early/late splits of 70/30, 80/20 and 90/10 are evaluated. Early-event station terms from one network train the frozen model, and later-event station terms from the other network supply the target. The features, thresholds, hyperparameters and source-only centring match the random-event test. Origin time is used only to assign events. Every cutoff and both transfer directions are retained in the output. An event-level split table records each earthquake, timestamp and partition.

Fixed macroregions are defined by reproducible latitude and longitude boundaries. Event influence is measured after deleting each of the ten events with the largest 3.0 s record count and after deleting all ten at every period. A record-weighted mean shift aligns each perturbed station field with the full field before comparison.

Path and source stratification

Records are grouped into four hypocentral-bearing sectors, four shortest-fault-distance bins and three source classes. Bearing is the initial great-circle direction from the source horizontal coordinates to the station. Stratification can disconnect the bipartite station-event graph, especially within 50 km. Each graph component is solved separately by sparse least squares. Stations require ten records within a stratum, retained components require ten supported stations, and every component is aligned to the full station field by its record-weighted mean difference. Across all 88 period-stratum fits, the maximum relative normal-equation residual is 1.90×10^{-9} and every solver returns an accepted convergence code.

Five random, disjoint event-half comparisons at 1.0, 2.0 and 3.0 s measure sampling reliability within each stratum. A station requires five records in each half. Both half-fields are component-aligned for storage and for constructing equal-stratum targets. The reported split-half correlation removes the weighted mean from every intersecting component pair before pooling stations, making the statistic invariant to unidentifiable component offsets. Equal-stratum sensitivity targets are formed by averaging the aligned station terms

across at least two available strata, with equal weight per stratum. The primary spatial-validation procedure is then repeated for azimuth-, distance- and source-class-balanced targets; prediction errors retain station record-count weights.

Empirical prediction intervals

For each held spatial block, signed prediction errors from the other four blocks provide record-weighted central intervals at nominal coverage from 50% to 95%. These quantiles are added to the held-block point prediction. Coverage is computed without using the held-block station terms for calibration. We count intervals that exclude a unit multiplier and intervals that remain above or below a factor of 1.1. Lower and upper station terms are propagated to the matched response spectra.

Independent-model stability is calculated separately. Primary spatial-block predictions are compared at KiK-net sites with terms predicted by the frozen K-NET model from disjoint earthquakes. Fold predictions are record-weighted to one value per target station and period. Field correlation, direction agreement, same-direction changes exceeding a factor of 1.1 and the distribution of model differences are reported. Prediction intervals describe station-model error; independent-model agreement describes reproducibility under a new network and earthquake set. Source, ground-motion-model and J-SHIS logic-tree uncertainties are outside both calculations.

Reference condition conversion

J-SHIS response-spectrum maps provide ordinates on engineering bedrock with $V_S = 400 \text{ m s}^{-1}$ [10, 11]. The station-surface factor replaces the MF2013 shallow-soil term for 400 m s^{-1} with the term evaluated at the station AVS30:


$$F_{\text{surf},i}(T) = 10^{G_s(AVS30_i,T) - G_s(400,T)}. \quad (3)$$

The cross-validated station factor $10^{\widehat{\delta S}_i(T)}$ is applied after this conversion. All eight period coordinates and four 50-year exceedance probabilities are read from the official map files. The calculation is restricted to matched station cells; national-grid interpolation lies outside this analysis.


Two-event KiK-net waveform check

The waveform check uses 460 paired surface and downhole records from two KiK-net earthquakes [12]. The first set contains 288 converted miniSEED pairs and the second contains 172 original NIED ASCII pairs converted with the scale factors in their headers. Each trace is demeaned and detrended. Horizontal peak amplitude is calculated from the two horizontal components. Surface-to-downhole Fourier amplitude ratios are evaluated from 0.2 to 20 Hz. This check is independent of the station residual model.


Supplementary Figures

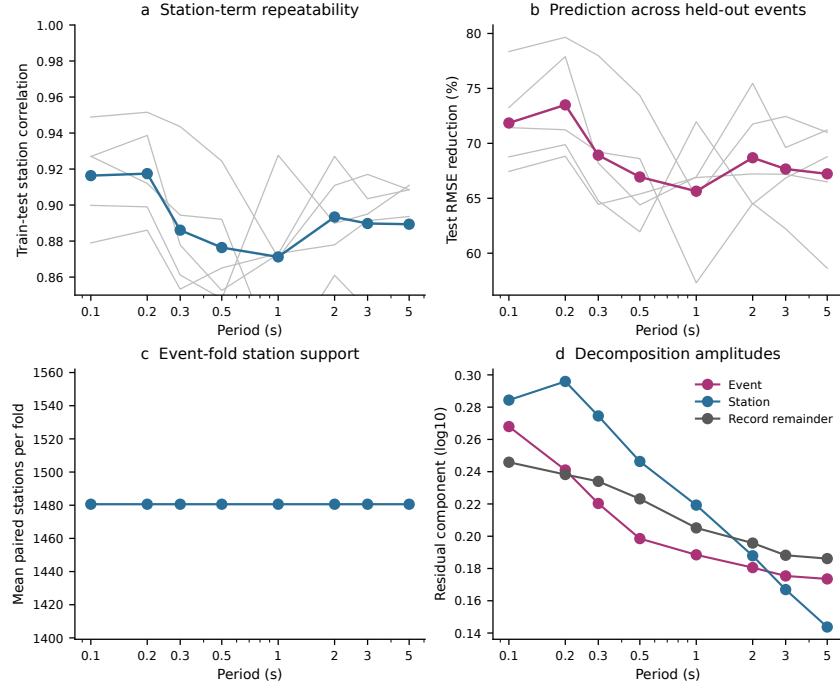


Supplementary Figure 1. Station term repeatability across held-out events. **a**, train-test station correlations for five event folds; grey lines show individual folds and the blue line shows their mean. **b**, test root mean squared error reduction relative to a zero station term. **c**, mean number of stations meeting train and test record thresholds. **d**, event, station and record-remainder amplitudes from the primary MF2013 site residual decomposition.

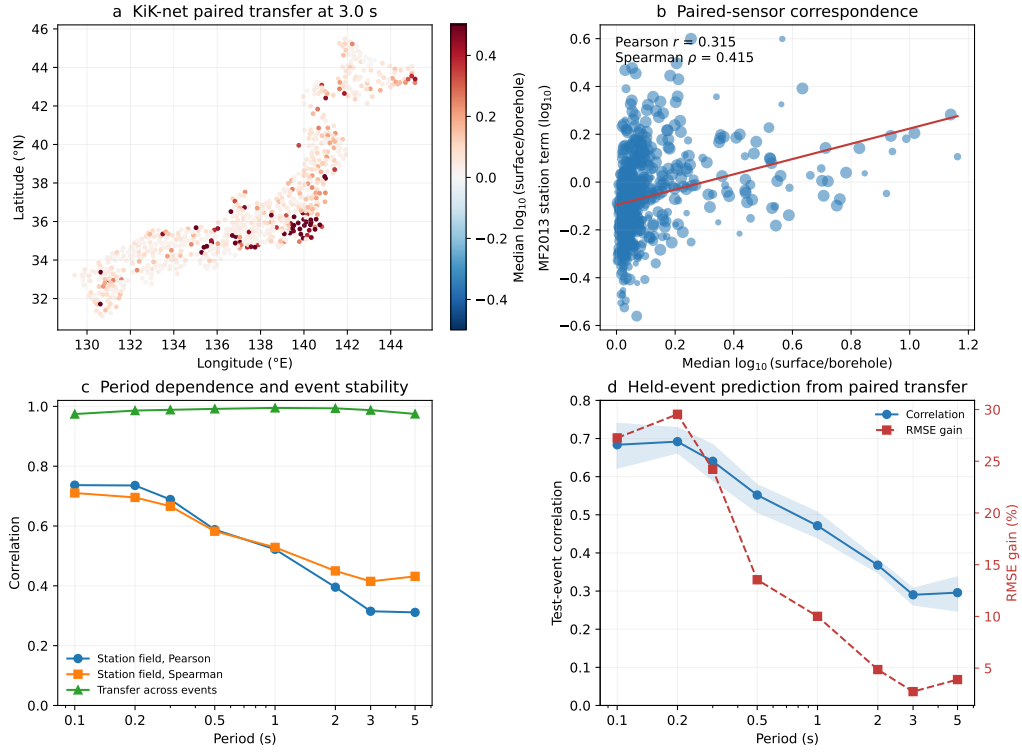


Supplementary Figure 2. National KiK-net paired-sensor validation. **a**, median surface-borehole RotD100 ratio at 3.0 s for 699 sites. **b**, primary station terms against paired ratios at supported sites. **c**, single-period station-term correspondence and transfer stability across period. **d**, held-event station-term prediction from transfer ratios estimated on disjoint earthquakes.

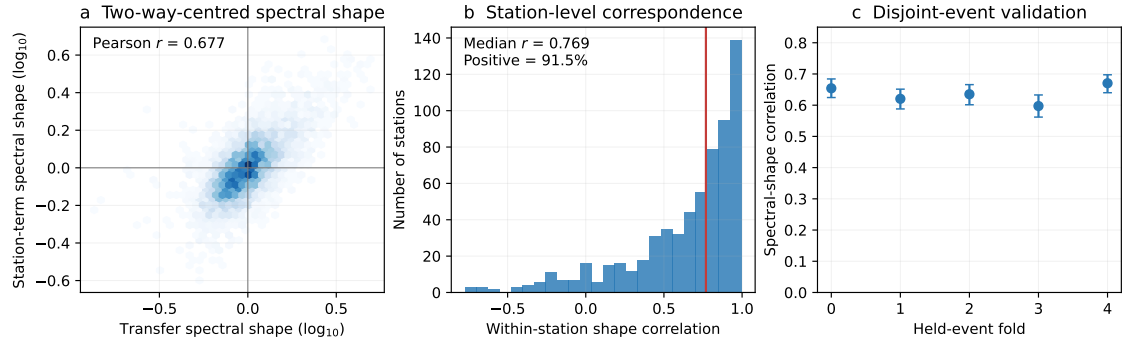


Supplementary Figure 3. Paired-sensor spectral-shape validation. **a**, two-way-centred station-term and surface–borehole transfer shapes across eight periods. **b**, distribution of within-station shape correlations. **c**, correlations when transfer spectra and station-term spectra are estimated from disjoint earthquake groups; bars are station-cluster bootstrap 95% intervals.

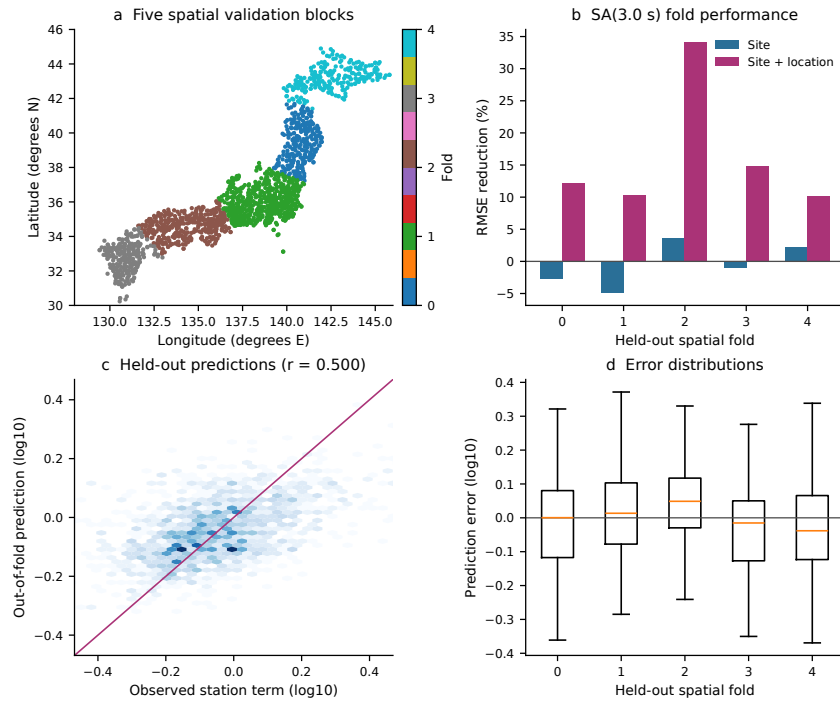


Supplementary Figure 4. Spatial validation of SA(3.0 s) station prediction. **a**, five station blocks used for cross-validation. **b**, root mean squared error reduction in each held-out block for the site-only and site-plus-location models. **c**, observed event-adjusted station terms and out-of-fold site-plus-location predictions. **d**, prediction-error distributions by spatial fold; boxes show interquartile ranges and whiskers extend to 1.5 times the interquartile range.

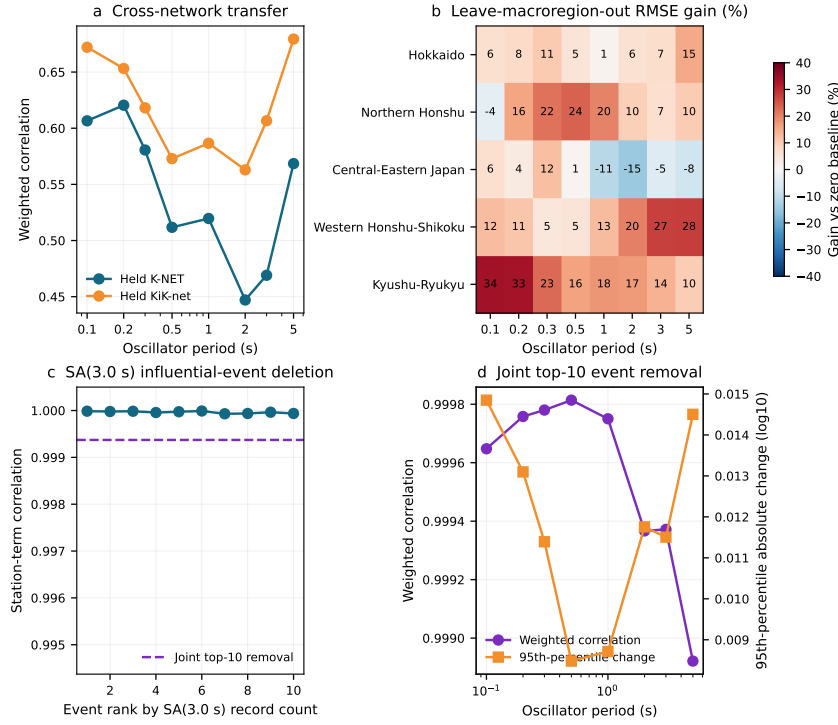


Supplementary Figure 5. Network, geographic and event-influence stress tests. **a**, common-feature transfer between K-NET and KiK-net. **b**, common-feature root mean squared error gain when each fixed macroregion is held out. **c**, SA(3.0 s) station-term correlation after deleting each of the ten highest-count events; the dashed line shows their joint deletion. **d**, station-term correlation and weighted 95th-percentile absolute change after jointly deleting the ten events at every period.

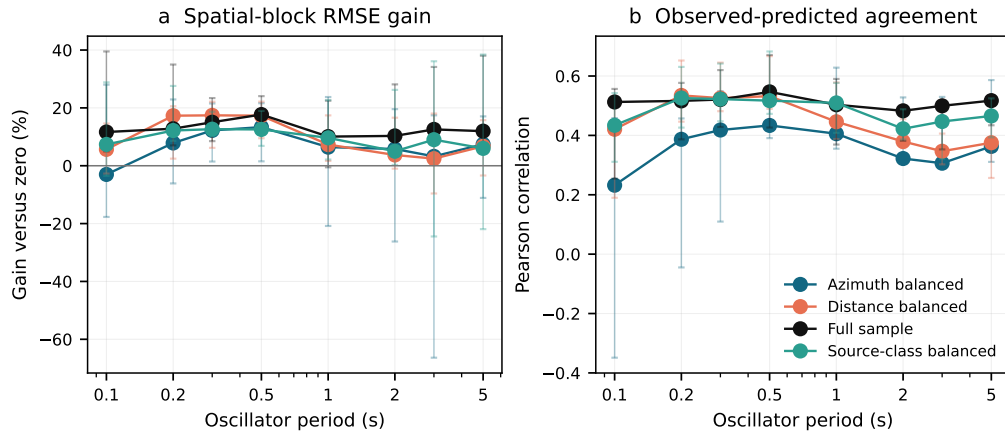


Supplementary Figure 6. Prediction of equal-stratum station fields. **a**, overall spatial-block root mean squared error gain relative to zero. **b**, observed-predicted correlation. Vertical bars span the five held-block results; circles show pooled results. The full-sample target is included for reference.

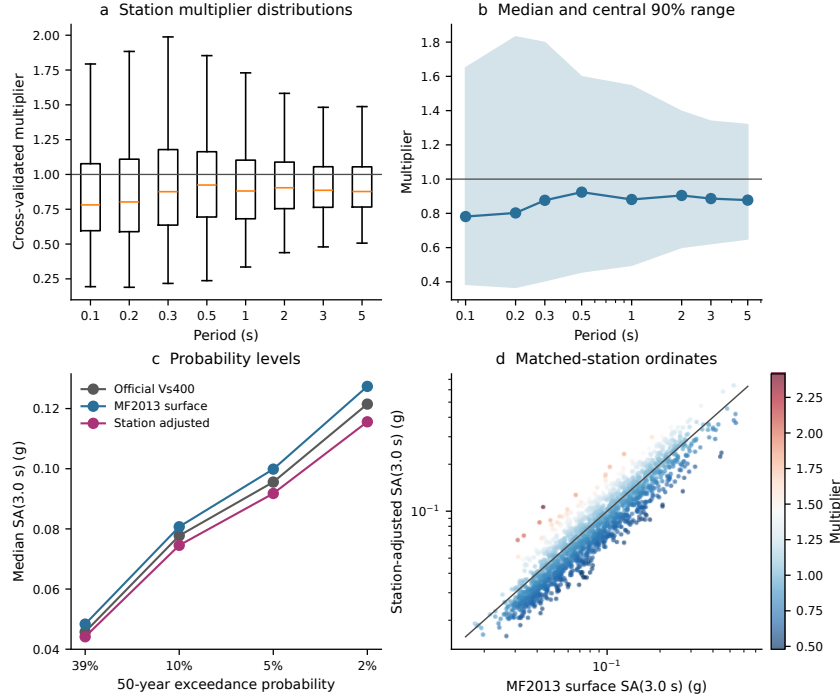


Supplementary Figure 7. Matched-station response-spectrum sensitivity. **a**, cross-validated station multiplier distributions at the eight direct periods. **b**, median and 5th–95th percentile multiplier range. **c**, median SA(3.0 s) ordinates at four 50-year exceedance probabilities for the official $V_S = 400 \text{ m s}^{-1}$ map, the MF2013 surface projection and the station-adjusted surface projection. **d**, paired MF2013 surface and station-adjusted SA(3.0 s) values at the 50-year 10% level; colour denotes the station multiplier.

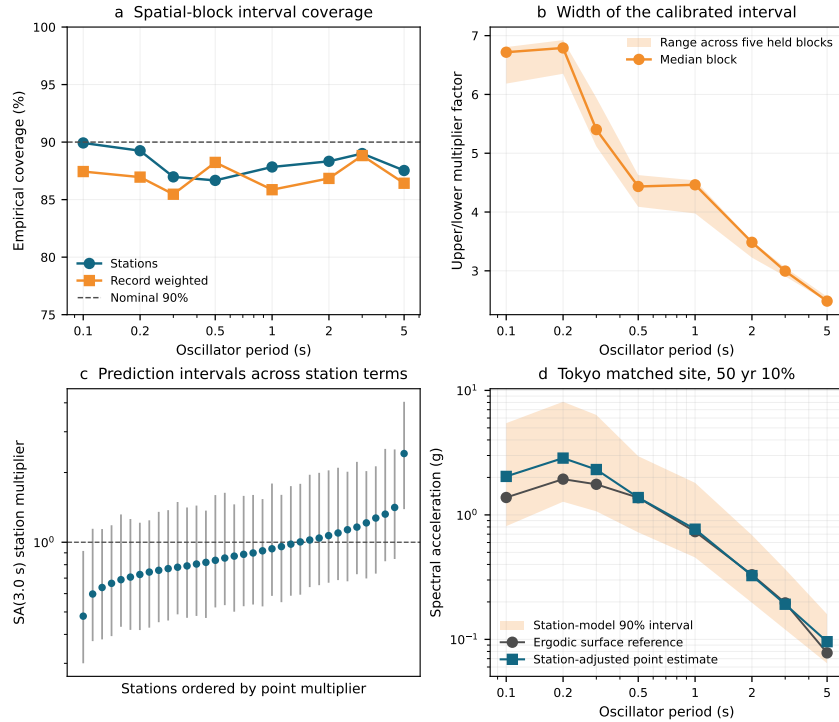


Supplementary Figure 8. Spatial-block station-model uncertainty. **a**, empirical coverage of the nominal 90% interval by period. **b**, median interval factor span and its range across the five held blocks. **c**, point multipliers and empirical intervals for 35 ordered SA(3.0 s) stations. **d**, surface-reference and station-adjusted spectra with the station-model interval at the Tokyo-nearest matched station. The interval excludes source, backbone and J-SHIS logic-tree uncertainty.

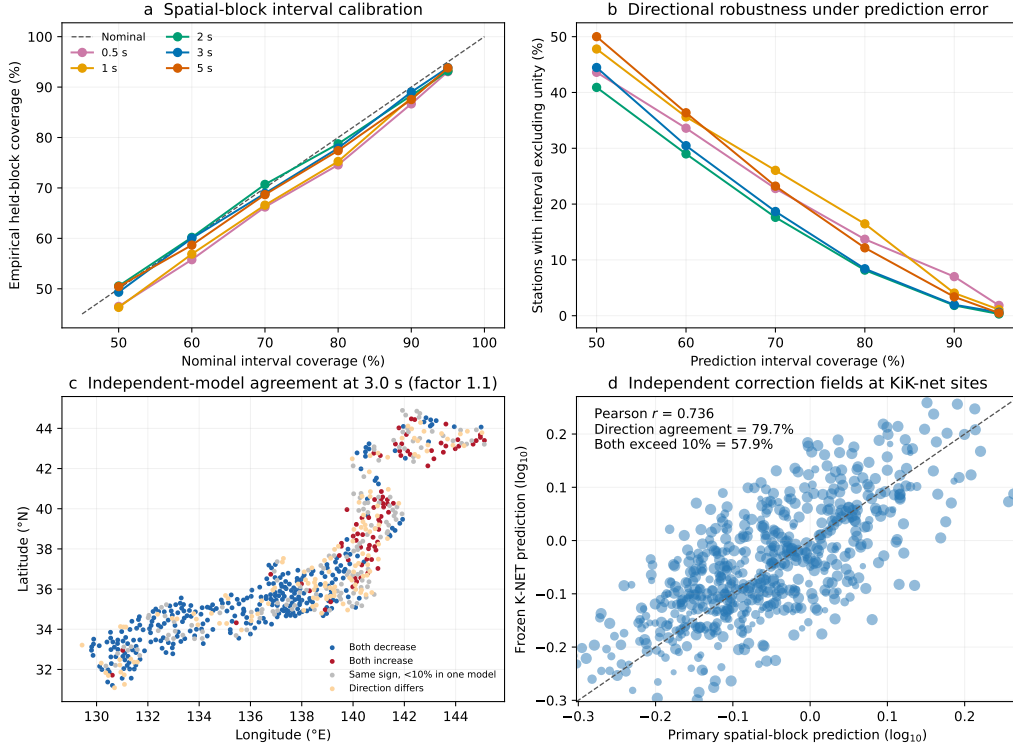

Supplementary Figure 9. Uncertainty and independent-model stability of station corrections. **a**, empirical spatial-block coverage against nominal coverage. **b**, fraction of station intervals excluding a unit multiplier. **c**, 3.0 s KiK-net sites classified by agreement between the primary and frozen K-NET correction fields. **d**, the two independent correction fields at 3.0 s. Prediction intervals and model agreement quantify different uncertainty components.

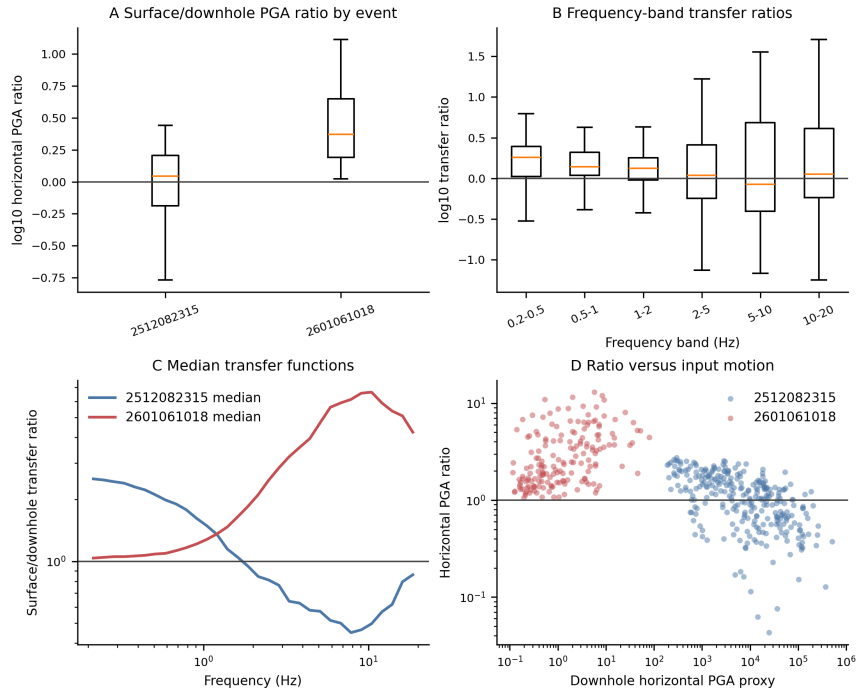

Supplementary Figure 10. KiK-net surface and downhole waveform comparison. **a**, horizontal surface-to-downhole peak acceleration ratios by earthquake. **b**, frequency-band Fourier amplitude ratios. **c**, median transfer functions for the two event sets. **d**, horizontal peak acceleration ratio against the downhole input-motion proxy. Ratios are shown in $\log_{10}$ units in panels **a** and **b**.

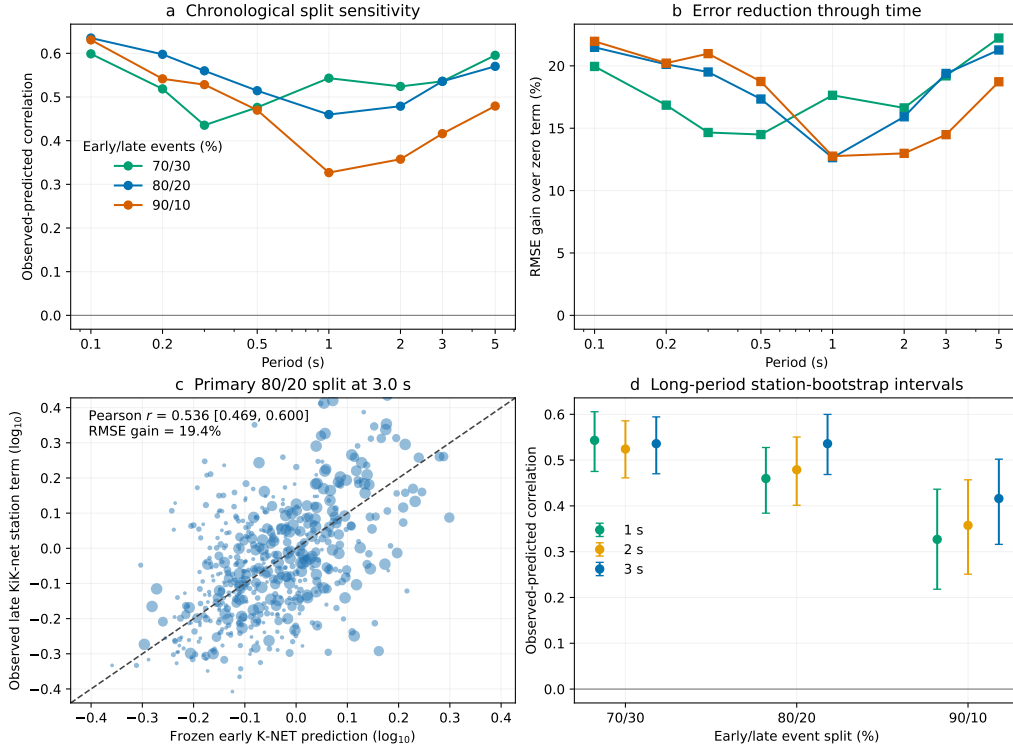

Supplementary Figure 11. Chronological cross-network station-field validation. **a**, K-NET-to-KiK-net correlations for fixed early/late event splits. **b**, root mean squared error reduction relative to a zero station term. **c**, frozen predictions from the earliest 80% of K-NET events against KiK-net terms estimated from the latest 20% at 3.0 s. **d**, station-bootstrap 95% intervals at 1–3 s. The reverse direction is reported in Supplementary Table 20.

Supplementary Tables

Supplementary Table 1. Primary residual decomposition

Period (s)	Records	Global offset	Event SD	Station SD	Remainder RMSE
log ₁₀ units					
0.1	222,664	0.284	0.268	0.284	0.246
0.2	222,664	0.215	0.241	0.296	0.238
0.3	222,664	0.172	0.220	0.275	0.234
0.5	222,664	0.106	0.199	0.246	0.223
1.0	222,664	0.017	0.188	0.219	0.205
2.0	222,664	-0.039	0.181	0.188	0.196
3.0	222,664	-0.085	0.175	0.167	0.188
5.0	222,664	-0.134	0.174	0.144	0.186

Supplementary Table 2. Event group station repeatability

Period (s)	Train-test correlation	Test RMSE reduction (%)	Mean paired stations	Mean test events
0.1	0.916	71.9	1,481	347.4
0.2	0.917	73.5	1,481	347.4
0.3	0.886	68.9	1,481	347.4
0.5	0.876	66.9	1,481	347.4
1.0	0.871	65.6	1,481	347.4
2.0	0.893	68.7	1,481	347.4
3.0	0.890	67.7	1,481	347.4
5.0	0.889	67.2	1,481	347.4

Supplementary Table 3. Zhao 2006 ground-motion-model sensitivity

Period (s)	MF2013–Zhao correlation	Median absolute difference ($\log_{10}$)	Zhao event correlation	Zhao spatial RMSE gain (%)
0.1	0.953	0.064	0.940	16.9
0.2	0.921	0.093	0.941	20.8
0.3	0.919	0.081	0.913	18.9
0.5	0.923	0.073	0.909	20.8
1.0	0.889	0.094	0.915	22.9
2.0	0.801	0.144	0.948	32.1
3.0	0.770	0.151	0.950	37.7
5.0	0.697	0.125	0.946	39.2

Supplementary Table 4. KiK-net paired-sensor spectral validation

Period (s)	Station term versus paired ratio			Ratio train–test correlation	Held–event term correlation	Held–event RMSE gain (%)
	Pearson	Spearman	Depth-adjusted Pearson			
0.1	0.737	0.710	0.739	0.974	0.684	27.3
0.2	0.736	0.696	0.737	0.986	0.692	29.5
0.3	0.689	0.666	0.703	0.989	0.640	24.2
0.5	0.588	0.583	0.630	0.992	0.552	13.5
1.0	0.522	0.529	0.585	0.995	0.471	10.0
2.0	0.395	0.450	0.437	0.993	0.368	4.9
3.0	0.315	0.415	0.327	0.988	0.290	2.7
5.0	0.311	0.432	0.342	0.975	0.296	3.9

Supplementary Table 5. Spatially held-out station prediction

Period (s)	Site-only model RMSE gain (%)	Site and location RMSE gain (%)	Observed–predicted correlation
0.1	-5.2	11.7	0.513
0.2	4.3	12.8	0.516
0.3	10.3	15.0	0.521
0.5	9.0	17.7	0.547
1.0	4.6	10.1	0.503
2.0	0.0	10.3	0.483
3.0	-2.3	12.6	0.500
5.0	-3.5	12.0	0.517

Supplementary Table 6. SA(3.0 s) network and fixed-macroregion transfer

Held group	Full-model RMSE gain (%)	Common-feature RMSE gain (%)	Common-feature correlation
K-NET	4.1	8.7	0.469
KiK-net	21.2	20.5	0.607
Hokkaido	7.2	6.9	0.284
Northern Honshu	5.4	6.8	0.304
Central-Eastern Japan	6.2	-5.2	0.402
Western Honshu–Shikoku	28.9	27.5	0.386
Kyushu–Ryukyu	13.4	13.8	0.372

Supplementary Table 7. Joint deletion of the ten highest-count events

Period (s)	Station-term correlation	Weighted 95th-percentile absolute change ($\log_{10}$)
0.1	0.99965	0.0148
0.2	0.99976	0.0131
0.3	0.99978	0.0114
0.5	0.99981	0.0085
1.0	0.99975	0.0087
2.0	0.99937	0.0118
3.0	0.99937	0.0115
5.0	0.99892	0.0145

Supplementary Table 8. SA(3.0 s) path and source stratification

Stratification	Stratum	Paired stations	Full-field correlation	Within-component split-half correlation	95th percentile difference
Hypocentral azimuth	000–090°	938	0.280	0.884	0.474
Hypocentral azimuth	090–180°	448	0.678	0.764	0.236
Hypocentral azimuth	180–270°	1,089	0.777	0.969	0.317
Hypocentral azimuth	270–360°	1,345	0.886	0.945	0.168
Fault distance	0–50 km	138	0.644	0.631	0.289
Fault distance	50–100 km	680	0.496	0.793	0.427
Fault distance	100–200 km	1,515	0.974	0.951	0.080
Fault distance	200–300 km	1,213	0.963	0.968	0.092
Source type	Crustal	1,494	0.942	0.905	0.120
Source type	Interplate	960	0.934	0.958	0.073
Source type	Intraplate	1,379	0.924	0.902	0.131

Supplementary Table 9. Equal-stratum spatial prediction sensitivity

Target field	Period (s)	Stations	Overall RMSE reduction (%)	Overall correlation	Minimum fold reduction (%)
Azimuth balanced	1.0	1,220	6.4	0.406	-20.8
Azimuth balanced	2.0	1,220	5.8	0.322	-26.2
Azimuth balanced	3.0	1,220	3.2	0.306	-66.4
Distance balanced	1.0	1,285	7.3	0.446	1.7
Distance balanced	2.0	1,285	3.7	0.379	-1.0
Distance balanced	3.0	1,285	2.5	0.347	-9.6
Source balanced	1.0	1,369	9.6	0.509	2.2
Source balanced	2.0	1,369	5.0	0.422	0.3
Source balanced	3.0	1,369	9.0	0.447	-24.5

Supplementary Table 10. Primary full-sample matched-station 50-year 10 percent response spectra

Period (s)	Station multiplier			Official V_S400 median spectral acceleration	MF2013 surface spectral acceleration (g)	Station adjusted acceleration (g)
	5th	Median	95th			
0.1	0.386	0.781	1.650	0.946	0.978	0.817
0.2	0.368	0.802	1.830	1.068	1.154	0.936
0.3	0.407	0.876	1.797	0.914	1.022	0.891
0.5	0.458	0.924	1.597	0.652	0.737	0.668
1.0	0.498	0.881	1.544	0.315	0.341	0.308
2.0	0.602	0.904	1.395	0.132	0.140	0.130
3.0	0.624	0.886	1.338	0.078	0.081	0.075
5.0	0.651	0.877	1.318	0.030	0.031	0.028

Supplementary Table 11. Empirical station-model prediction intervals

Period (s)	Station coverage (%)	Record-weighted coverage (%)	Median upper/lower multiplier factor
0.1	89.9	87.4	6.72
0.2	89.3	87.0	6.79
0.3	87.0	85.5	5.40
0.5	86.7	88.2	4.43
1.0	87.8	85.9	4.32
2.0	88.3	86.8	3.49
3.0	89.0	88.8	3.00
5.0	87.5	86.4	2.48

Supplementary Table 12. City-nearest SA(3.0 s) station cases

City	Station	Distance (km)	Multiplier	Change (%)	Surface SA	Adjusted SA (g)
Tokyo	TKY007	2.4	0.975	-2.5	0.196	0.192
Osaka	OSK005	3.6	0.885	-11.5	0.223	0.197
Sapporo	HKD180	8.6	1.312	+31.2	0.124	0.163
Sendai	MYG013	5.0	0.890	-11.0	0.131	0.116
Fukuoka	FKOH03	14.1	0.748	-25.2	0.035	0.026

Supplementary Table 13. Sequential record selection

Stage	Records	Excluded	Earthquakes	Stations
Public sub1-v2024 archive	333,808	0	1,840	2,581
Ground-surface installation	231,380	102,428	1,840	1,882
Finite F-net M_w	222,705	8,675	1,737	1,881
Supported source class and positive distance	222,705	0	1,737	1,881
Positive AVS30	222,664	41	1,737	1,880
Finite RotD100 and MF2013 predictions at all periods	222,664	0	1,737	1,880

Supplementary Table 14. Response-component sensitivity

Period (s)	Station-field correlation	Weighted difference RMSE	95th percentile absolute difference	Median record RotD50/RotD100
0.1	0.9995	0.0076	0.0179	0.853
0.2	0.9995	0.0081	0.0183	0.839
0.3	0.9994	0.0079	0.0176	0.834
0.5	0.9993	0.0073	0.0177	0.831
1.0	0.9990	0.0077	0.0197	0.826
2.0	0.9988	0.0074	0.0194	0.820
3.0	0.9986	0.0071	0.0180	0.819
5.0	0.9983	0.0064	0.0177	0.820

Supplementary Table 15. SA(3.0 s) spatial-model complexity sensitivity

Setting	Changed parameter	RMSE gain (%)	Correlation
Primary	None	12.56	0.500
Fewer leaves	Maximum leaf nodes = 7	13.98	0.512
More leaves	Maximum leaf nodes = 31	10.45	0.467
Larger minimum leaf	Minimum samples per leaf = 70	10.71	0.483
Stronger regularisation	L2 regularisation = 1.0	12.29	0.496
Shorter iteration budget	Maximum iterations = 200	12.85	0.497

Supplementary Table 16. MF2013 regression-domain sensitivity including the Kanno-PGA cutoff

Period (s)	Station-field correlation	95th-percentile difference ($\log_{10}$)	Event-group correlation	Spatial RMSE gain (%)	OOF-prediction correlation	Restricted multiplier 5th–95th percentile
0.1	0.963	0.144	0.916	-2.3	0.671	0.485–1.871
0.2	0.973	0.128	0.909	12.2	0.766	0.436–2.018
0.3	0.969	0.117	0.903	16.3	0.720	0.454–1.995
0.5	0.965	0.117	0.884	18.5	0.756	0.481–1.785
1.0	0.959	0.109	0.829	9.3	0.666	0.538–1.679
2.0	0.956	0.094	0.777	5.8	0.615	0.596–1.541
3.0	0.959	0.082	0.762	4.1	0.648	0.660–1.503
5.0	0.924	0.098	0.719	7.6	0.637	0.707–1.428

Supplementary Table 17. KiK-net station-term and surface–borehole spectral-shape correspondence

Event scope	Stations	Shape correlation	Cluster-bootstrap 95% interval	Median station correlation	Positive stations (%)
All events	639	0.677	0.648–0.704	0.769	91.5
Held fold 1	603	0.654	0.625–0.684	0.732	91.5
Held fold 2	568	0.620	0.588–0.651	0.701	88.6
Held fold 3	607	0.635	0.601–0.666	0.734	89.3
Held fold 4	537	0.597	0.562–0.633	0.666	88.1
Held fold 5	605	0.670	0.640–0.697	0.751	91.2
Fold mean	584	0.635	—	0.717	89.7

Supplementary Table 18. Network- and event-external station prediction

Period (s)	K-NET to KiK-net, physical		K-NET to KiK-net, physical + location		KiK-net to K-NET, physical + location	
	Correlation	RMSE gain (%)	Correlation	RMSE gain (%)	Correlation	RMSE gain (%)
0.1	0.368	6.2	0.641	22.3	0.549	13.1
0.2	0.394	6.2	0.580	20.0	0.490	16.0
0.3	0.439	12.2	0.570	22.0	0.390	7.9
0.5	0.416	9.6	0.543	19.8	0.278	-5.0
1.0	0.416	9.5	0.575	20.3	0.360	-0.3
2.0	0.417	11.5	0.567	18.5	0.430	2.3
3.0	0.439	13.0	0.598	20.8	0.462	4.0
5.0	0.447	10.3	0.642	25.9	0.539	14.3

Supplementary Table 19. Agreement between primary and frozen K-NET correction fields at KiK-net sites

Period (s)	Field correlation	Direction agreement (%)	Same-direction change above 10% (%)	Median absolute difference ($\log_{10}$)
0.1	0.709	81.1	68.5	0.100
0.2	0.692	80.3	67.3	0.122
0.3	0.680	76.8	63.4	0.123
0.5	0.690	76.8	63.1	0.097
1.0	0.698	76.4	57.0	0.079
2.0	0.713	77.2	56.2	0.061
3.0	0.736	79.7	57.9	0.053
5.0	0.752	80.4	59.6	0.046

Supplementary Table 20. Chronological K-NET-to-KiK-net station-field transfer

Early/late events (%)	Period (s)	Target stations	Correlation	Correlation 95% interval	RMSE gain (%)	RMSE-gain 95% interval (%)
70/30	1.0	593	0.543	0.475–0.606	17.6	10.1–24.4
70/30	2.0	593	0.524	0.461–0.586	16.6	9.7–23.4
70/30	3.0	593	0.536	0.470–0.594	19.2	13.6–24.2
80/20	0.1	547	0.635	0.587–0.679	21.5	16.1–26.6
80/20	0.2	547	0.598	0.537–0.652	20.1	14.4–25.4
80/20	0.3	547	0.560	0.495–0.620	19.5	12.4–26.7
80/20	0.5	547	0.514	0.448–0.577	17.3	10.1–23.9
80/20	1.0	547	0.460	0.384–0.527	12.6	4.0–20.2
80/20	2.0	547	0.479	0.401–0.550	15.9	8.5–22.6
80/20	3.0	547	0.536	0.469–0.600	19.4	13.6–24.9
80/20	5.0	547	0.570	0.503–0.630	21.3	14.7–27.3
90/10	1.0	355	0.327	0.218–0.436	12.8	4.4–20.3
90/10	2.0	355	0.358	0.251–0.457	13.0	5.3–20.3
90/10	3.0	355	0.416	0.316–0.502	14.5	6.7–21.8

The physical-plus-location model is shown. In the reverse 80/20 test at 3.0 s, KiK-net-to-K-NET transfer gives a correlation of 0.302 and an RMSE gain of -3.3% (95% interval -7.8% to 1.5%).

Supplementary References

- [1] National Research Institute for Earth Science and Disaster Resilience. Strong Ground Motion Flat File. NIED, <https://doi.org/10.17598/NIED.0032> (2025).
- [2] National Research Institute for Earth Science and Disaster Resilience. Flat file of K-NET and KiK-net strong-motion records. <https://www.j-shis.bosai.go.jp/en/labs/ground-motion-flatfile/> (2024).
- [3] Dohi, Y. et al. Probabilistic seismic hazard analysis of response spectra: toward advanced national seismic hazard maps for Japan. *J. Jpn. Assoc. Earthq. Eng.* **24**, 1_124–1_147 (2024). https://doi.org/10.5610/jaee.24.1_124.
- [4] Morikawa, N. & Fujiwara, H. A new ground motion prediction equation for Japan applicable up to M9 mega-earthquake. *J. Disaster Res.* **8**, 878–888 (2013). <https://doi.org/10.20965/jdr.2013.p0878>.
- [5] Morikawa, N. & Fujiwara, H. Ground motion prediction equation based on Morikawa and Fujiwara 2013. J-SHIS/NIED, <https://www.j-shis.bosai.go.jp/labs/mf2013/en/> (2023).

- [6] Morikawa, N. et al. New additional correction terms for attenuation relations corresponding to anomalous seismic intensity in northeastern Japan. *J. Jpn. Assoc. Earthq. Eng.* **6**, 23–41 (2006). <https://doi.org/10.5610/jaee.6.23>.
- [7] Kanno, T., Narita, A., Morikawa, N., Fujiwara, H. & Fukushima, Y. A new attenuation relation for strong ground motion in Japan based on recorded data. *Bull. Seismol. Soc. Am.* **96**, 879–897 (2006). <https://doi.org/10.1785/0120050138>.
- [8] Zhao, J. X. et al. Attenuation relations of strong ground motion in Japan using site classification based on predominant period. *Bull. Seismol. Soc. Am.* **96**, 898–913 (2006). <https://doi.org/10.1785/0120050122>.
- [9] Pagani, M. et al. OpenQuake Engine: an open hazard and risk software for the Global Earthquake Model. *Seismol. Res. Lett.* **85**, 692–702 (2014). <https://doi.org/10.1785/0220130087>.
- [10] Azuma, H., Kawai, S. & Fujiwara, H. Development of J-SHIS and applications using API. *J. Disaster Res.* **8**, 869–877 (2013). <https://doi.org/10.20965/jdr.2013.p0869>.
- [11] Earthquake Research Committee. Probabilistic seismic hazard analysis of response spectra provisional edition. https://www.jishin.go.jp/evaluation/seismic_hazard_map/sh_response_spectrum/ (2022).
- [12] Aoi, S., Kunugi, T. & Fujiwara, H. Strong-motion seismograph network operated by NIED K-NET and KiK-net. *J. Jpn. Assoc. Earthq. Eng.* **4**, 65–74 (2004). https://doi.org/10.5610/jaee.4.3_65.