

Repeatable station terms redistribute long-period response spectra across Japanese strong-motion sites

Haoyu Zhou¹ and Qiang Ma^{1,*}

¹Institute of Engineering Mechanics, China Earthquake Administration, 29 Xuefu Road, Nangang District, Harbin 150080, China

*Correspondence: maqiang@iem.ac.cn

ORCID: Haoyu Zhou, 0009-0003-8817-1209; Qiang Ma, 0000-0002-9768-5223

Abstract

Regional hazard products average ground motion, yet repeatable station departures can alter local spectra. We analyse 222,664 K-NET and KiK-net surface records at eight MF2013-compatible RotD100 periods from 0.1 to 5.0 s. At 3.0 s, disjoint-event station terms correlate at 0.890, and MF2013 and Zhao 2006 fields at 0.770. Across 102,428 paired KiK-net surface–borehole spectra, ratios correlate at 0.988 across event groups, at 0.315 with station terms, and predict held-event terms at 0.290. Site and location variables reduce spatial-block RMSE by 12.6% across 1,628 stations. Cross-validated multipliers span 0.624–1.338 and change local spectra in both directions. A strict MF2013 regression-domain sensitivity, including the Kanno-PGA cutoff, retains a 0.959 field correlation and a 4.1% spatial error reduction. The results identify a persistent average-path station field that redistributes matched J-SHIS spectra and requires path conditioning for source-specific use.

Keywords: strong-motion records; station terms; path effects; response spectra; Japan

1 Introduction

Regional ground-motion models assign a common median to recordings with similar source, path and site descriptors. Repeated recordings at the same station often remain systematically above or below that median, motivating nonergodic source, site and path terms[1–5]. Fully nonergodic models for Japan already resolve spatially varying source, site and path adjustments, and three-dimensional simulations provide an additional constraint on basin-related site terms[6, 7].

Japan offers an unusually dense test of station-specific residuals. The J-SHIS/NIED Strong Ground Motion Flat File links K-NET and KiK-net records to earthquake sources, distances and site metadata[8–12]. The Morikawa–Fujiwara 2013 model, hereafter MF2013, includes a magnitude-distance backbone and site terms based on AVS30 and D1400[13, 14]. AVS30 is the average shear-wave velocity in the upper 30 m, and D1400 is the depth to the 1.4 km s^{−1} shear-wave velocity horizon. Their period-dependent coefficients provide a direct test of shallow-soil and deep-sedimentary contributions.

Long-period motion is sensitive to sedimentary depth and basin geometry. Observations and simulations in Japan show persistent amplification and surface-wave effects at periods relevant to large basins and long-period structures[15–18]. A station residual in this band can combine local response, unresolved path structure and sensor effects. Japan’s provisional probabilistic

response-spectrum maps provide an engineering-bedrock coordinate on which such a correction can be tested[19].

We evaluate station-field stability under changes in earthquake sample, ground-motion model and path distribution, then apply spatial-block out-of-fold predictions to matched J-SHIS response spectra. Event holdout and a Zhao 2006 calculation test sample and model dependence. A national KiK-net surface-borehole comparison tests whether the residual ordering follows measured paired-sensor amplification. Network, regional, event-influence and path-stratified analyses define the spatial and source-path range of the inferred field. The spectrum calculation quantifies an average-path station adjustment on the published hazard coordinate.

2 Results

2.1 Surface-record residuals

The public subset contains 333,808 records, of which 231,380 are from ground-surface installations; the remainder includes KiK-net borehole sensors. Requiring the MF2013 inputs leaves 222,664 records from 1,880 surface stations and 1,737 earthquakes at each period. Among these stations, 1,628 have at least 20 records and enter the station-level analysis. Their distribution covers the Japanese islands, and the earthquake set includes crustal, interplate and intraplate sources (Fig. 1a).

The D1400 and AVS30 terms improve the residual fit most strongly between 1 and 3 s. Their reduction in mean absolute residual is 3.0% at 0.1 s and 14.0% at 1.0 s, reaches 20.0% and 21.4% at 2.0 and 3.0 s, and decreases to 16.2% at 5.0 s (Fig. 1b; Table 1; Supplementary Table 1). Every period is read directly from the flatfile RotD100 spectrum.

For each period, the residual is separated into a global intercept, an event term, a station term and a record remainder. The station component is larger at short periods and decreases towards 5.0 s, while the event and record components vary less across period (Fig. 1c). The global intercept is retained as a model offset and is excluded from the station correction.

2.2 Station terms recur across events

Station terms estimated from disjoint event groups remain strongly correlated. At 3.0 s, each test group contains about 347 earthquakes, and an average of 1,481 stations meet the train and test record thresholds. Separate two-way event-station decompositions of the training and test records give a mean train-test correlation of 0.890. Applying the training-event station term to the test-event station term reduces root mean squared error by 67.7% relative to zero. Correlations range from 0.871 to 0.917 across 0.1–5.0 s, and the period-specific reductions range from 65.6% to 73.5% (Fig. 1d; Supplementary Fig. 1; Supplementary Table 2).

The MF2013 site terms remove most of the long-period association with D1400. At 3.0 s, the event-adjusted station correlation with D1400 decreases from 0.751 for the magnitude-distance backbone to 0.194 after the D1400 and AVS30 terms are added (Fig. 2a,c). The corresponding correlation with basement depth decreases but remains positive (Fig. 2b). The residual field still contains basin or spatial structure beyond the two MF2013 site variables.

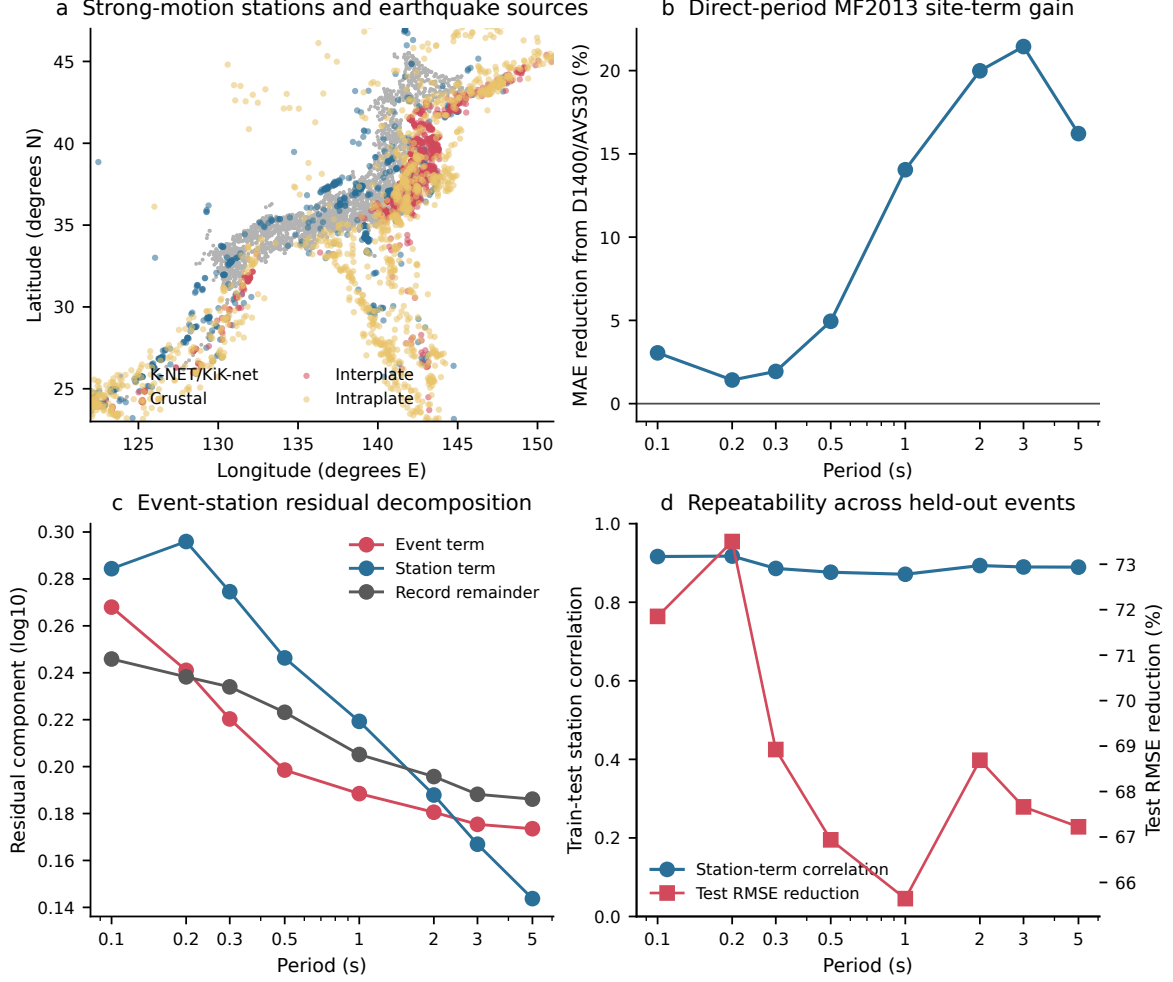


Figure 1. Data coverage and residual decomposition. **a**, K-NET and KiK-net stations and earthquake sources used in the residual calculation. **b**, Reduction in mean absolute residual after adding the MF2013 D1400 and AVS30 terms at directly observed periods. **c**, record-weighted standard deviations of the event and station terms and the root mean squared record remainder. **d**, repeatability of station terms across five held-out event groups. Blue circles show the mean train-test station-term correlation; red squares show the mean reduction in test root mean squared error relative to a zero station term.

An approximate application of the MF2013 anomalous-intensity term changes individual residuals but preserves the station field. At 3.0 s, primary and sensitivity station terms correlate at 0.971, and the D1400 correlation changes from 0.194 to 0.206 (Fig. 2d). The main period pattern is insensitive to this approximation.

2.3 Station patterns persist under a second model

We repeated the residual decomposition with the Zhao et al. 2006 model as implemented in OpenQuake[20, 21]. The source-class-specific active-crustal, interface and intraslab variants use the same surface observations, source classes, AVS30 values and documented shortest fault distances. At 3.0 s, the MF2013 and Zhao station terms correlate at 0.770 across 1,628 stations; the record-weighted correlation is 0.735, and the median absolute difference is 0.151 $\log_{10}$ units (Fig. 3; Supplementary Table 3). Their signs agree at 77.5% of stations. Correlations decrease from 0.953 at 0.1 s to 0.697 at 5.0 s, showing greater backbone dependence at long periods while

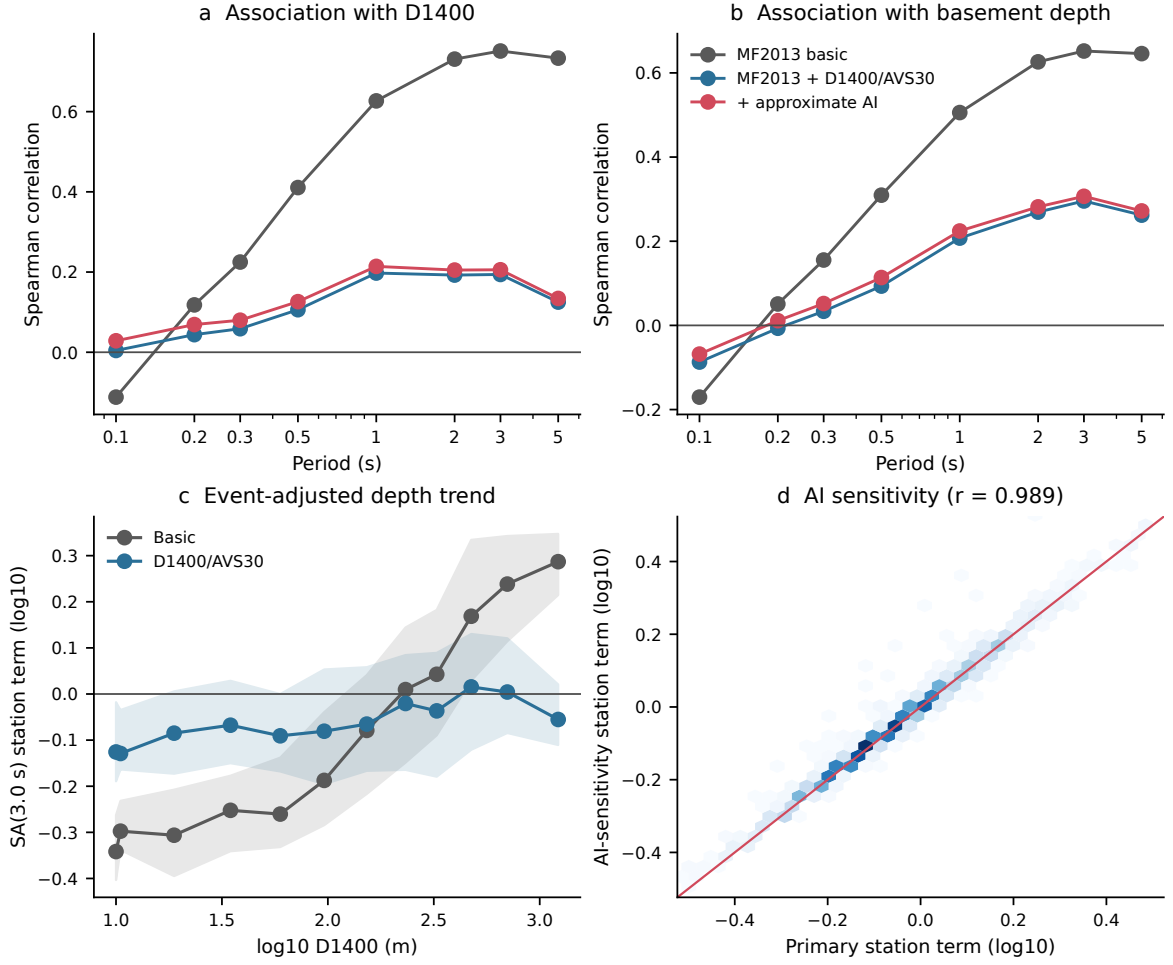


Figure 2. Event-adjusted station terms and sedimentary-depth variables. **a**, Spearman correlations between station terms and D1400. **b**, correlations with basement depth. Grey denotes the MF2013 magnitude-distance backbone, blue includes D1400 and AVS30, and red adds the rule-based anomalous-intensity sensitivity. **c**, binned SA(3.0 s) station terms against D1400 before and after the site terms; lines show bin medians and bands show interquartile ranges. **d**, comparison between primary and anomalous-intensity sensitivity station terms at 3.0 s.

retaining a common average ordering.

The Zhao residuals also repeat across held-out event groups. Their 3.0 s train-test correlation is 0.950, and the site-and-location model reduces spatial-block root mean squared error by 37.7%, with an observed-predicted correlation of 0.792. Both calculations use the same observations and validation design, so this comparison measures sensitivity to the ground-motion model.

2.4 Paired surface–borehole spectra support the station field

The flatfile contains 102,428 KiK-net event–site pairs with positive surface and borehole RotD100 ordinates at each analysed period, covering 699 sites and 1,410 earthquakes. Among 639 sites linked to supported primary station terms, the station term and median surface–borehole ratio at 3.0 s have Pearson and Spearman correlations of 0.315 and 0.415. Removing linear trends with log borehole depth gives a Pearson correlation of 0.327. The Pearson correlation is 0.737 at 0.1 s, 0.522 at 1.0 s and 0.395 at 2.0 s (Fig. 4; Supplementary Table 4).

The paired ratios are stable across disjoint earthquake groups. At 3.0 s, their mean train–test

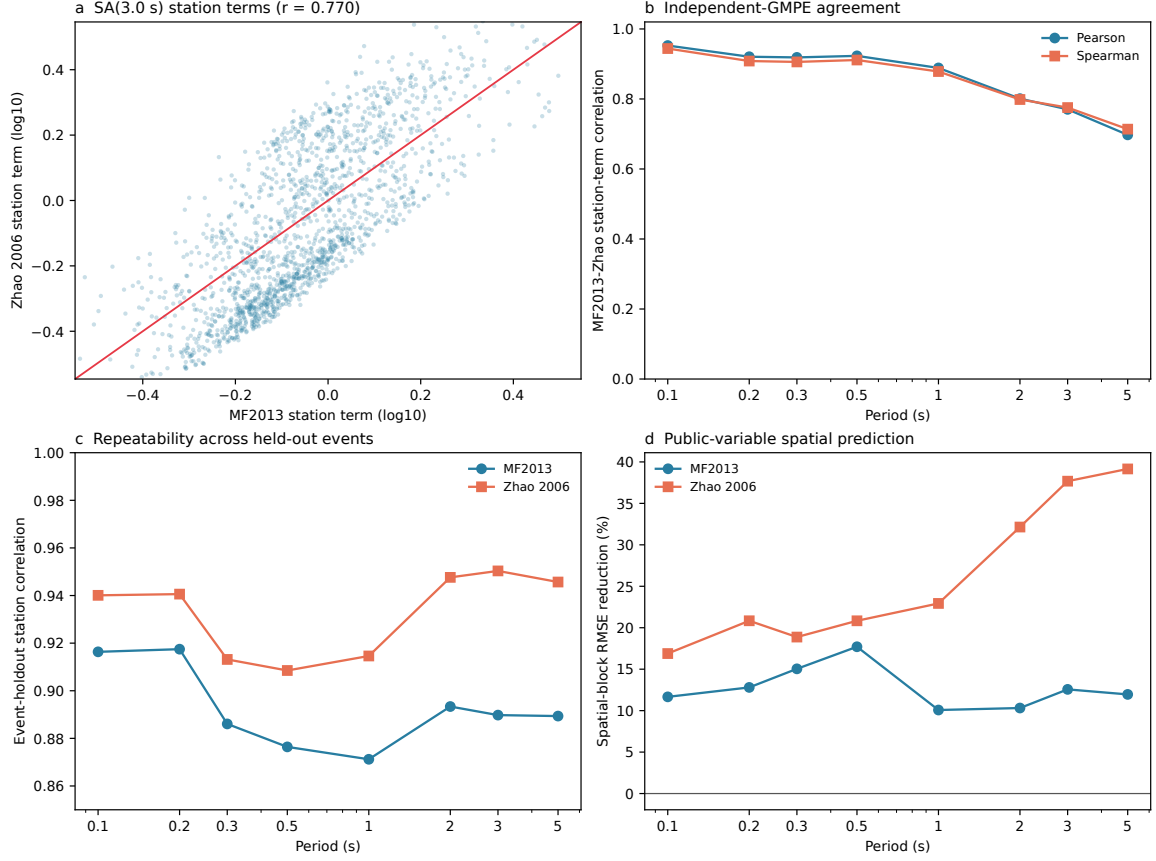


Figure 3. Ground-motion-model sensitivity of the station field. **a**, MF2013 and Zhao 2006 station terms at 3.0 s. **b**, station-term correlations across the eight direct periods. **c**, event-group repeatability for both residual models. **d**, spatial-block root mean squared error reduction for the site-and-location model. Both residual calculations use the same surface records.

correlation is 0.988. A line calibrated between training-event ratios and training-event station terms predicts station terms fitted only to held-out events with a mean correlation of 0.290 and a 2.7% root mean squared error reduction relative to zero. The corresponding correlation and error reduction are 0.471 and 10.0% at 1.0 s. These held-event results connect the residual station field to a repeatable paired-sensor response while retaining separate events for calibration and evaluation.

Table 1. Direct period residual and prediction results

Period (s)	MAE gain (%)	D1400 correlation Basic	Site	Event holdout correlation	Spatial model RMSE gain (%)
0.1	3.0	-0.112	0.004	0.916	11.7
0.2	1.4	0.118	0.044	0.917	12.8
0.3	1.9	0.225	0.059	0.886	15.0
0.5	4.9	0.411	0.106	0.876	17.7
1.0	14.0	0.627	0.198	0.871	10.1
2.0	20.0	0.731	0.192	0.893	10.3
3.0	21.4	0.751	0.194	0.890	12.6
5.0	16.2	0.733	0.125	0.889	12.0

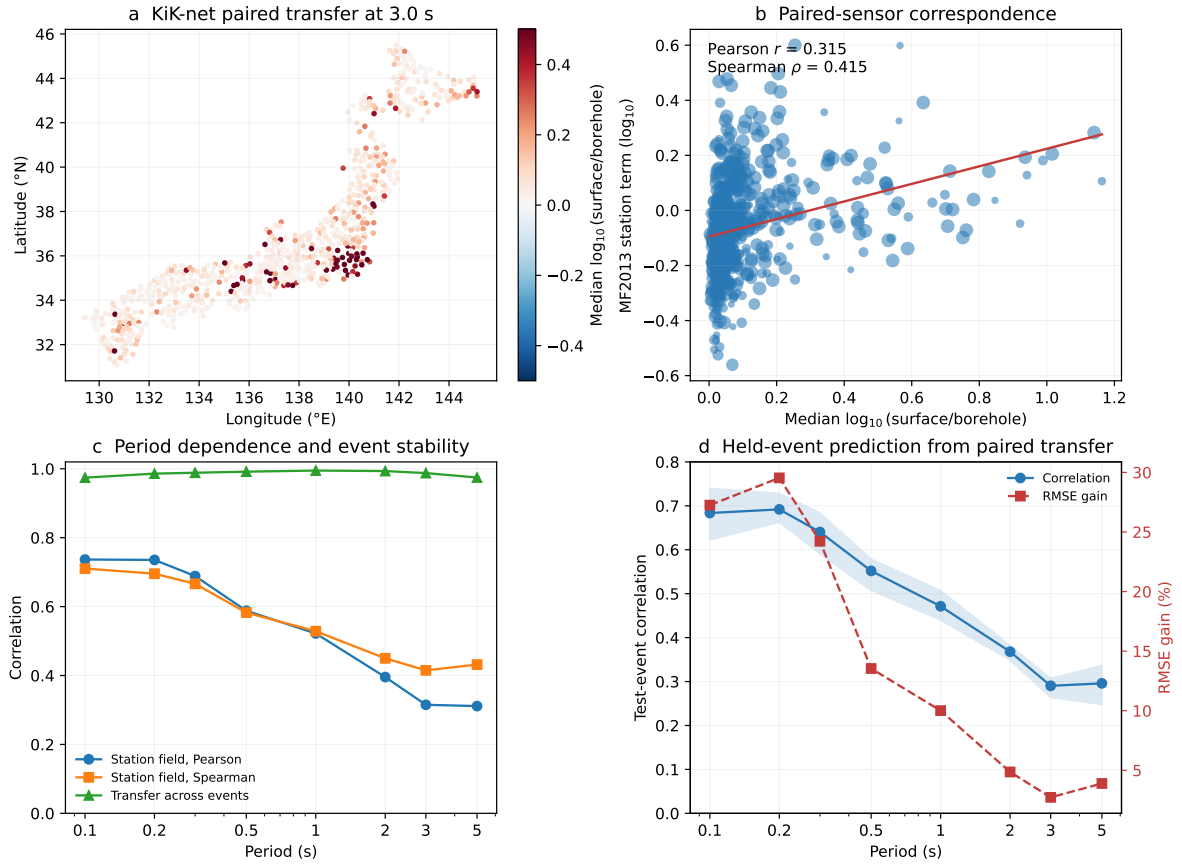


Figure 4. KiK-net paired-sensor validation. **a**, median surface–borehole RotD100 ratio at 3.0 s for 699 paired sites. **b**, primary MF2013 station terms against paired ratios at supported surface sites; point area scales with paired-record count. **c**, station-term correspondence and train–test stability of paired ratios across period. **d**, station-term correlation and root mean squared error reduction when ratios from training earthquakes predict station terms fitted to held-out earthquakes; shading spans the five event folds.

2.5 Site and location variables predict held-out stations

The site-only model uses shallow velocities, sedimentary depths, elevation, sensor depth and network. At 3.0 s its spatial-block root mean squared error is 2.3% higher than the zero-term baseline. After longitude, latitude and volcanic-front distances are added, the site-and-location model reduces error by 12.6% and gives an observed–predicted correlation of 0.500. Error reductions across the five held-out blocks range from 10.2% to 34.1%. The site descriptors retain associations with station residuals; prediction beyond a spatial block also draws on location.

The site-and-location model improves on the zero baseline at every direct period. Root mean squared error reductions are 10.1%, 10.3%, 12.6% and 12.0% at 1.0, 2.0, 3.0 and 5.0 s, respectively (Fig. 5b; Supplementary Fig. 2; Supplementary Table 5). A common-feature model that excludes VS20, VS30 and network identity also transfers between K-NET and KiK-net. At 3.0 s it reduces error by 8.7% when K-NET is held out and by 20.5% when KiK-net is held out. Fixed macroregion tests are less uniform: the full model improves all five regions by 5.4% to 28.9%, whereas the common-feature sensitivity changes from -5.2% to 27.5% (Supplementary Fig. 3; Supplementary Table 6). Joint deletion of the ten highest-count events leaves station-term correlations above 0.9989 at every period and changes the 3.0 s field by 0.012 $\log_{10}$ units at its

record-weighted 95th percentile (Supplementary Table 7).

Across six fixed model-complexity settings, the 3.0 s error reduction remains between 10.5% and 14.0%. Every setting improves on zero at all eight periods, with gains from 7.1% to 19.3%. The alternatives are used only to test sensitivity and do not replace the primary model.

The primary analysis uses the full domain of the public flatfile. Applying the complete published MF2013 regression-domain screens, including the Kanno-PGA distance cutoff, leaves 35,857 records from 411 earthquakes[22]. At 3.0 s, station fields estimated from the restricted and primary samples correlate at 0.959 across 578 supported stations. Within the restricted sample, disjoint event groups correlate at 0.762, and the site-and-location model reduces spatial-block error by 4.1%. The gain is positive from 0.2 to 5.0 s and is -2.3% at 0.1 s.

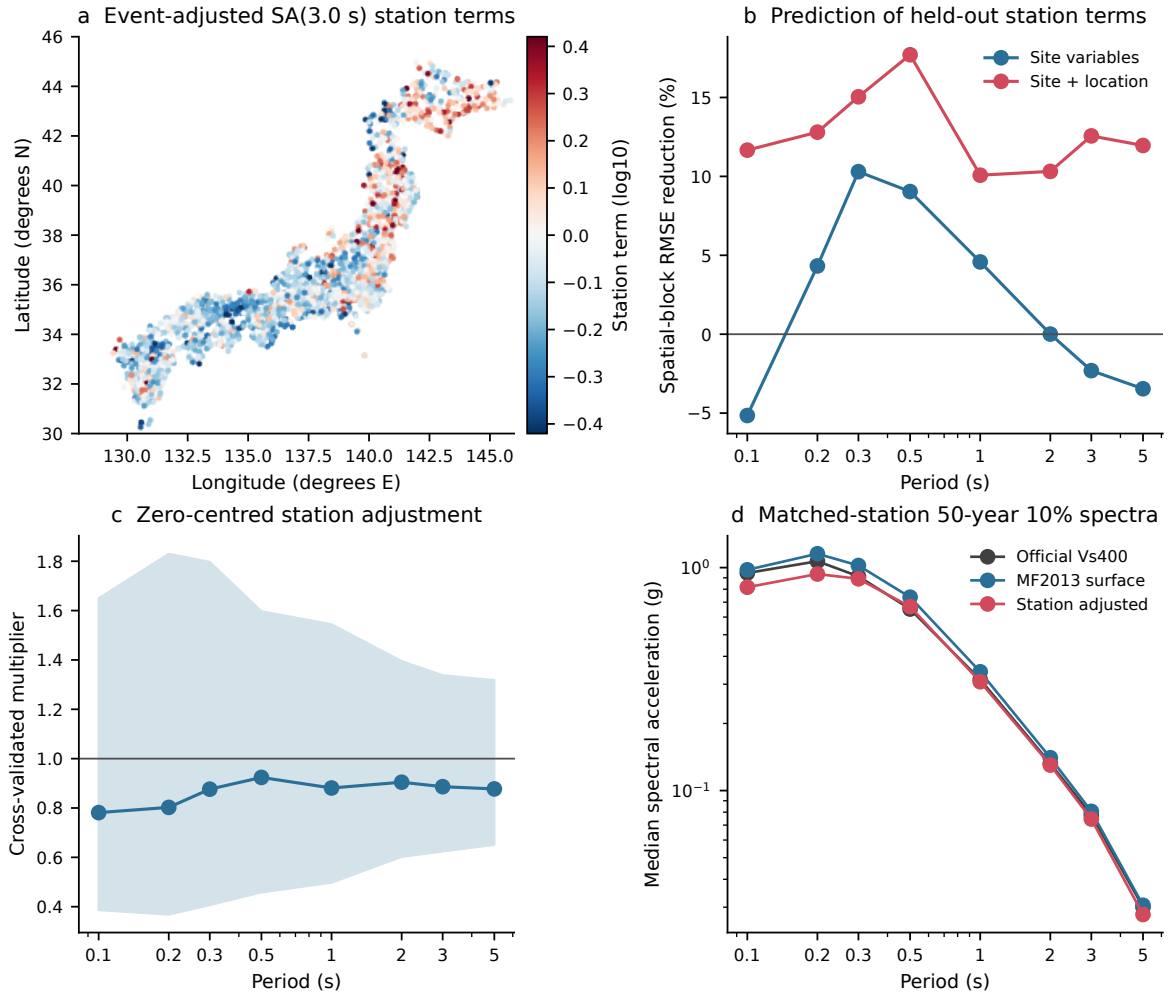


Figure 5. Primary full-sample prediction and response-spectrum propagation. **a**, event-adjusted SA(3.0 s) station terms at stations with at least 20 records. **b**, spatial-block root mean squared error reduction for models using site variables and site plus location variables. **c**, median and 5th–95th percentile range of zero-centred cross-validated station multipliers. **d**, matched-station median 50-year 10% response spectra on official $V_S = 400 \text{ m s}^{-1}$ engineering bedrock, after projection to the station surface condition, and after the station adjustment. All periods are calculated directly.

2.6 Path strata expose conditional transfer

Random event holdout preserves the broad path distribution seen by each station. We re-estimated station terms within four hypocentral-bearing sectors, four shortest-fault-distance bins and the three source classes. At 3.0 s, source-class fields correlate at 0.924–0.942 with the full field, and the 100–300 km distance fields correlate at 0.963–0.974. Directional-sector correlations span 0.280–0.886, while within-component correlations between disjoint event halves of the same sectors span 0.764–0.969 (Fig. 6; Supplementary Table 8). High within-sector repeatability alongside low full-field agreement shows a systematic directional component.

Equal weighting across available path strata retains a weaker persistent component. At 1–3 s, models fitted to azimuth-, distance- and source-class-balanced fields reduce overall spatial-block error by 2.5%–9.6%. Several individual spatial blocks have negative gains, including the azimuth-balanced 3.0 s field (Supplementary Fig. 4; Supplementary Table 9). Public station variables predict an average component of the residual field. Prediction strength varies with path coverage.

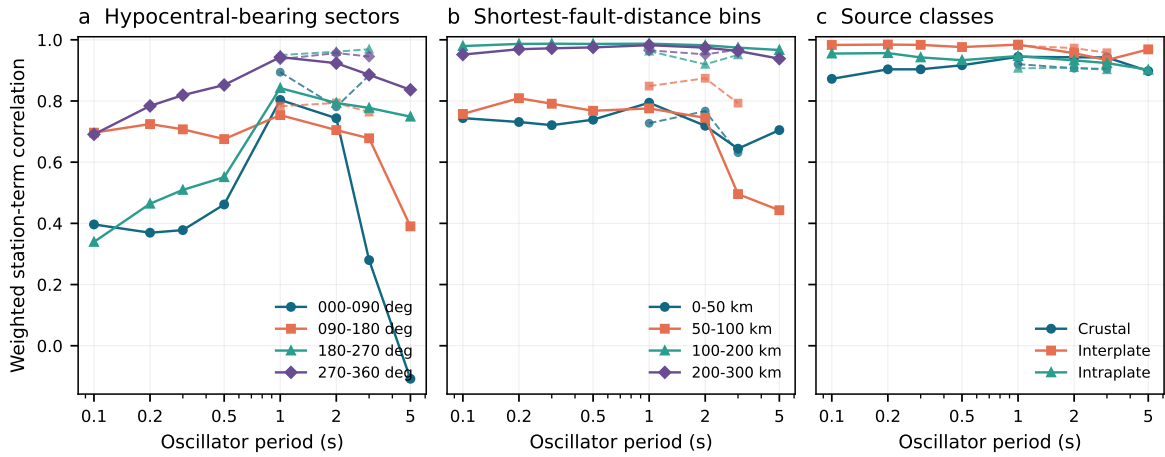


Figure 6. Path and source stratification of the station field. **a**, hypocentral-bearing sectors. **b**, shortest-fault-distance bins. **c**, source classes. Solid lines compare each stratum field with the full station field at all eight periods. Dashed lines show mean within-component correlations between five pairs of disjoint event halves at 1.0, 2.0 and 3.0 s. Disconnected station-event graphs are solved separately; split-half correlations remove the weighted offset of every intersecting component pair.

2.7 Local spectra change in both directions

The primary full-sample station predictions are centred to zero in log space before propagation. At 3.0 s, their multipliers have 5th, 50th and 95th percentiles of 0.624, 0.886 and 1.338 (Fig. 5c). The corresponding local changes are -37.6% , -11.4% and $+33.8\%$. At 5.0 s, the 5th and 95th percentiles are 0.651 and 1.318.

Official J-SHIS response-spectrum ordinates are defined on engineering bedrock with $V_S = 400$ m s $^{-1}$. At each matched station, we replace the MF2013 shallow-soil factor for 400 m s $^{-1}$ with the factor for the station AVS30. In the primary full sample, the median official ordinate at the 50-year 10% probability level and 3.0 s is 0.078 g, and the median surface-reference ordinate is 0.081 g. Applying the cross-validated station multiplier changes the median to 0.075 g (Fig. 5d; Supplementary Fig. 5; Supplementary Table 10). The global MF2013 residual offset is excluded

from this station correction.

The strict-domain 3.0 s multipliers span 0.660–1.503 between their 5th and 95th percentiles. On the same 578 stations, the primary prediction changes the surface-spectrum median from 0.094 to 0.098 g, while the strict-domain prediction changes it to 0.096 g. Local upward and downward changes persist; the aggregate median depends on the record domain and station set.

Spatial-block errors provide a separate empirical prediction interval for each held block. At 3.0 s, the nominal 90% interval covers 89.0% of stations and 88.8% after record-count weighting; its median upper-to-lower multiplier span is 3.00 (Supplementary Fig. 6; Supplementary Table 11). These intervals quantify station-model error under the spatial validation design. Source recurrence, ground-motion-model uncertainty and the J-SHIS logic tree remain those of the published hazard product.

City-nearest matched stations illustrate the bidirectional effect. At 3.0 s, the cross-validated changes are -2.5% near Tokyo, -11.5% near Osaka, $+31.2\%$ near Sapporo, -11.0% near Sendai and -25.2% near Fukuoka (Fig. 7; Supplementary Table 12). Each value is a station-level example for the nearest analysed station.

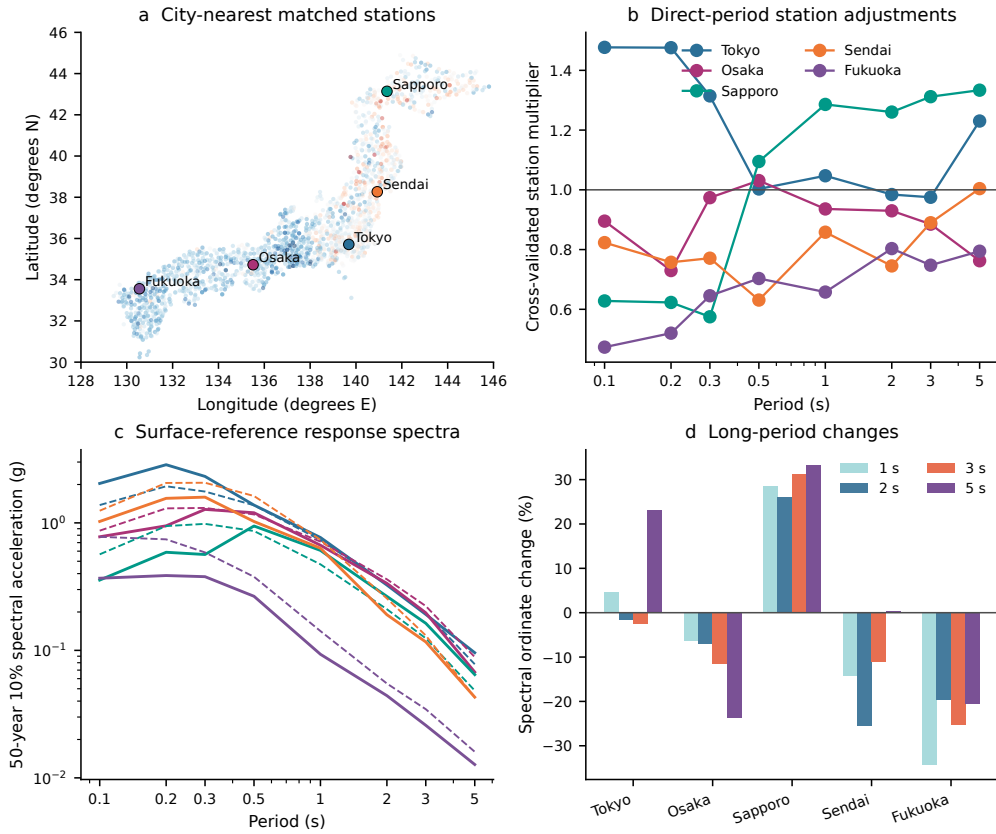


Figure 7. Illustrative city-nearest station cases. **a**, analysed stations nearest to five Japanese cities. **b**, direct-period cross-validated multipliers at the selected stations. **c**, 50-year 10% surface-reference response spectra before and after the station adjustment; dashed and solid lines denote the two spectra. **d**, percentage changes at 1.0, 2.0, 3.0 and 5.0 s. Distances to the selected stations are 2.4 km for Tokyo, 3.6 km for Osaka, 8.6 km for Sapporo, 5.0 km for Sendai and 14.1 km for Fukuoka.

3 Discussion

Fully nonergodic Japanese ground-motion models separate spatially varying source, site and path terms, and three-dimensional simulations constrain basin response[6, 7]. We evaluate a simpler station field derived from public flatfile variables and connect it to an official response-spectrum product. MF2013 D1400 and AVS30 terms remove much of the 1–5 s sedimentary-depth trend. The remaining field recurs across random event groups and retains a common ordering under Zhao 2006. Regional site-response models and residual-based basin analyses describe related spatial structure at broader scales[23, 24].

The response-component comparison separates amplitude coordinates from spatial structure. RotD100 matches the MF2013 horizontal-vector target. At 3.0 s, RotD50 and RotD100 station fields correlate at 0.9986 and differ by 0.018 $\log_{10}$ units at the 95th percentile. Their record-level median ratio is 0.819, and their remainder dispersions differ. Component choice has little effect on station ordering, whereas absolute residual levels and variability depend on the model-compatible coordinate.

The national paired-sensor comparison supplies a direct observational check on the station field. Surface–borehole ratios are highly stable across event groups and retain a positive relation to held-event station terms at every period. At 3.0 s, the full-field correlation is 0.315 and the held-event prediction correlation is 0.290, with a 2.7% error reduction. The weaker long-period correspondence is consistent with a station field that combines local response with unresolved path and backbone effects.

Random event holdout measures repeatability under each station’s broad observed path mixture. Path-stratified analyses then test how the field changes with direction, distance and source class. The 3.0 s field for the 000–090° sector has a within-component correlation of 0.884 across disjoint event halves and correlates with the full field at 0.280. Source-class fields are more stable, and the 100–300 km distance fields closely follow the full ordering. The contrast identifies station-specific path structure, which fully nonergodic models represent through explicit path terms[6]. The station quantity used here is an average over the observed source-path distribution.

Public site and location variables recover part of that average field. The 3.0 s spatial-block gain is 12.6%, all five primary folds improve, and the common-feature model transfers in both directions between K-NET and KiK-net. Equal-stratum fields remain predictable in aggregate, with 1–3 s gains of 2.5%–9.6%. Several individual spatial folds deteriorate. The model supports interpolation within well-sampled parts of the existing network. New regions and source-path distributions require local records or an explicit path model.

The spectrum calculation keeps the official $V_S = 400 \text{ m s}^{-1}$ ordinate, the MF2013 surface projection and the zero-centred station adjustment as separate quantities. At 3.0 s, the primary point multipliers span 0.624–1.338 across their central 90%; the strict-domain calculation gives 0.660–1.503. Both redistribute local ordinates upward and downward. The full matched network median decreases, while the strict-domain station subset increases under both primary and restricted predictions, so a national median shift is not a transferable result. The empirical station-model interval has a median upper-to-lower factor of 3.00. The matched-mesh calculation retains source recurrence, aleatory variability and logic-tree aggregation from the published

J-SHIS product[25–31]. The resulting values quantify average-path sensitivity. Source-specific use requires hazard deaggregation and path-conditioned terms inside the hazard integral.

The public subset covers events with JMA magnitude $M_{\text{JMA}} \geq 5$ and fault distance no greater than 300 km; the primary MF2013 calculation further requires finite F-net M_w . The strict sensitivity applies $M_w \geq 5.5$, distance below 200 km, at least five eligible stations and the Kanno-PGA cutoff. Its 3.0 s field correlation of 0.959 and spatial gain of 4.1% support the long-period station pattern within the published regression domain. The adverse 0.1 s spatial result limits this conclusion to periods of 0.2 s and longer. The calculation reconstructs the published screening equations on the current public flatfile; it does not recreate the historical waveform database or regression weights. Incomplete plate-membership metadata restrict the anomalous-intensity term to a rule-based sensitivity analysis. Zhao receives shortest fault distance as rupture distance and AVS30 as VS30, and RotD50 serves as the closest available orientation-independent coordinate to its geometric-mean target. The two-event waveform analysis complements the national paired-spectral validation with frequency-domain ratios (Supplementary Fig. 7).

Across eight direct periods, the Japanese surface-record archive contains a repeatable station-associated field that changes matched long-period response spectra in both directions. Its average component is partly predictable from public site and location variables. Directional and short-distance tests identify the missing path dependence and define the additional information required before source-specific hazard application.

4 Methods

4.1 Strong motion data

We used the public `sub1-v2024` subset of the J-SHIS/NIED Strong Ground Motion Flat File[8, 9]. The download page defines this subset by magnitude of at least 5 and shortest fault distance no greater than 300 km. In the downloaded archive, all 333,808 records have JMA magnitude $M_{\text{JMA}} \geq 5$; F-net M_w is a separate field required by MF2013. Record, source and site tables were joined through `smrec_id`, `eq_source_id` and `site_id`. K-NET and KiK-net provide the observations and metadata[10–12]. The official installation code identifies ground-surface and borehole sensors separately. The primary residual and spectrum analyses use ground-surface installations only; KiK-net borehole records enter the paired-sensor validation.

MF2013 predicts the maximum norm of the two horizontal linear-oscillator responses, which is equivalent to RotD100. The primary analysis reads 5%-damped RotD100 spectral acceleration at 0.1, 0.2, 0.3, 0.5, 1.0, 2.0, 3.0 and 5.0 s[19]. Every value comes from its corresponding flatfile column. The archive contains 231,380 ground-surface records. Of these, 8,675 lack finite F-net M_w ; 41 additional records have nonpositive AVS30. The remaining records have positive spectral acceleration and distance, finite model predictions and an MF2013 source class, leaving 222,664 records at each period (Supplementary Table 13). RotD50 residuals are retained for a component sensitivity. At 3.0 s, the RotD50 and RotD100 station fields correlate at 0.9986 and differ by 0.018 $\log_{10}$ units at the 95th percentile (Supplementary Table 14).

4.2 MF2013 residuals

The MF2013 magnitude-distance prediction follows the published coefficients[13, 14]. The site calculation adds

$$G_d(T) = p_d(T) \log_{10} \left[\frac{\max(D_{l\min}(T), D_{1400})}{300} \right] \quad (1)$$

and

$$G_s(T) = p_s(T) \log_{10} \left[\frac{\min(V_{S\max}(T), AVS30)}{350} \right]. \quad (2)$$

Residuals are $r_{ij}(T) = \log_{10} Y_{ij}(T) - \log_{10} \hat{Y}_{ij}(T)$ for station i and event j . The anomalous-intensity sensitivity follows the published northeastern and southwestern geographic and depth rules[32, 33]. Incomplete plate-membership flags restrict this calculation to a sensitivity analysis. The Philippine Sea Plate correction is an event-level constant at a given period[34]; the fitted event term absorbs this constant during station-effect estimation.

4.3 Event and station decomposition

For each period and MF2013 variant, we fit

$$r_{ij}(T) = \mu(T) + \delta E_j(T) + \delta S_i(T) + \epsilon_{ij}(T), \quad (3)$$

where μ is the global intercept, δE_j is the event term, δS_i is the station term and ϵ_{ij} is the record remainder. Alternating grouped least squares estimates the event and station terms. Record-count-weighted means of δE and δS are constrained to zero. We fit three variants at each period: the magnitude-distance backbone, the D1400/AVS30 site model and the site model with the anomalous-intensity sensitivity. Iteration stops when the largest parameter change is below $10^{-10} \log_{10}$ units or after 5,000 iterations. All 24 period-model combinations converged; the largest final change was 9.99×10^{-11} and the largest iteration count was 1,161. Stations require at least 20 records for association and prediction analyses.

For the event holdout, earthquakes are randomly assigned to five groups with a fixed seed; the same partition is used at every period and for both ground-motion backbones. Each fold fits the two-way event-station decomposition separately to the four training groups and the held-out group. The paired train and test station vectors are each centred using their own record counts. Stations require at least 15 training records and five test records. We report the train-test station correlation and the test-record-weighted root mean squared error reduction relative to zero. Every training and test decomposition converges below $10^{-10} \log_{10}$ units.

4.4 Alternative ground-motion-model sensitivity

The Zhao et al. 2006 active-crustal, interface and intraslab equations are evaluated with OpenQuake Engine 3.25.1[20, 21]. Source type selects the equation branch, the documented shortest fault distance supplies rupture distance, AVS30 supplies VS30, and the flatfile hypocentral depth and crustal rake complete the required context. OpenQuake defines Zhao for the geometric mean of two horizontal components; RotD50 is the closest orientation-independent response coordinate available in the flatfile and is used for this calculation. Predictions are evaluated at

the same eight periods and surface-record sample as MF2013. The event-station decomposition, event holdout and spatial-block prediction retain the same thresholds and folds. This calculation measures backbone sensitivity within one observational archive.

4.5 Spatial station prediction

Two histogram gradient-boosting regressors predict the event-adjusted station term. The site-only model uses log-transformed VS10, VS20, VS30, AVS30, D1100, D1400, D1700, D2100 and basement depth, together with elevation, sensor depth and network. The site-and-location model adds longitude, latitude and the two volcanic-front distance fields. Missing numeric values are median-imputed within each training fold; network is mode-imputed and one-hot encoded.

Both models use squared-error loss, learning rate 0.04, 400 iterations, 15 maximum leaf nodes, 35 minimum samples per leaf and L2 regularisation 0.1. Five spatial blocks are formed by k -means clustering of standardised station coordinates. Each station is predicted only by the model trained on the other four blocks. Out-of-fold predictions are centred to zero using station record counts before conversion to multipliers $f_i(T) = 10^{\widehat{\delta S}_i(T)}$. The zero station term is the baseline. Reported errors are weighted by the number of records at each station. The same hyperparameters are used in every period and fold. A six-setting sensitivity changes maximum leaf nodes, minimum leaf size, L2 regularisation or iteration budget one at a time while preserving the folds, preprocessing, weights and seed; it is not used for model selection (Supplementary Table 15).

4.6 MF2013 applicability sensitivity

The published MF2013 regression analysis selected $M_w \geq 5.5$ ground-surface recordings with two horizontal components, at least five triggered stations per event and source distance below 200 km[13]. It also removed records beyond the distance at which the Kanno et al. median PGA fell below 10 cm s^{-2} [22]. We evaluate the Kanno base equations before their station-amplification term. Shallow events use focal depth at or below 30 km; deeper events use the deep-event coefficients. After all record screens, events with fewer than five eligible stations are removed. We then repeat the residual decomposition, event holdout, spatial prediction and spectrum propagation. This strict-domain sample contains 35,857 records from 411 earthquakes and 578 stations with at least 20 records (Supplementary Table 16).

4.7 Transfer and event-influence tests

Cross-network tests train on one surface network and evaluate the other. A common-feature variant excludes VS20, VS30 and network identity because their completeness differs between K-NET and KiK-net; it retains VS10, AVS30, sedimentary depths, elevation, sensor depth, coordinates and volcanic-front distances. Five fixed macroregions provide a second geographic leaveout test. Event influence is evaluated by removing each of the ten events with the largest 3.0 s record count and by removing all ten together at every period. Perturbed station terms are aligned to the full record-weighted zero reference before comparison.

4.8 Path and source stratification

The MF2013 RotD100 records are divided into four hypocentral-bearing sectors (000–090°, 090–180°, 180–270° and 270–360°), four shortest-fault-distance bins (0–50, 50–100, 100–200 and 200–300 km), and crustal, interplate and intraplate source classes. Bearing is the initial great-circle direction from the source horizontal coordinates to the station. Station-event graphs can become disconnected after stratification. Each connected component is solved by sparse least squares, and components with at least ten stations having ten records are aligned separately to the full station field. Five repeated event splits estimate within-stratum sampling reliability at 1.0, 2.0 and 3.0 s; each half requires five records per station. Split-half correlations are calculated after weighted centring within each intersecting component pair, so arbitrary component offsets do not enter the statistic.

For a persistent-field sensitivity, component-aligned station terms are averaged with equal weight across the available strata of each dimension. A station contributes when at least two azimuth sectors, distance bins or source classes are available. The physical and site-and-location models are refitted to each balanced field with the same five-block clustering procedure and hyperparameters used for the primary target. Strata receive equal weight in the target; prediction errors retain station record-count weights.

4.9 Station-model prediction intervals

For each held spatial block, signed out-of-fold errors from the other four blocks define record-weighted 5th and 95th percentiles. Adding these error quantiles to the held-block point prediction gives an empirical 90% station-term interval. Coverage is evaluated separately for each held block and then pooled by period. The lower and upper terms are converted to multipliers and propagated through the same response-spectrum calculation as the point estimate. These bounds cover station-model prediction error only.

4.10 Response spectrum propagation

We read official J-SHIS 2020 response-spectrum map ordinates at the same eight periods and at 50-year exceedance probabilities of 2%, 5%, 10% and 39% [28, 30, 31]. The maps define spectral acceleration on engineering bedrock with $V_S = 400 \text{ m s}^{-1}$. For station i , the surface-reference factor is

$$F_{\text{surf},i}(T) = 10^{G_s(AVS30_i,T) - G_s(400,T)}. \quad (4)$$

The ergodic surface ordinate is $S_{\text{surf},i} = S_{400,i} F_{\text{surf},i}$, and the station-adjusted ordinate is

$$S_{\text{adj},i}(T) = S_{\text{surf},i}(T) 10^{\widehat{\delta S}_i(T)}. \quad (5)$$

Only out-of-fold station predictions enter this calculation. Quantiles are evaluated over the 1,628 matched surface stations. The correction represents the average source-path distribution in the strong-motion archive. City cases use the nearest matched station by great-circle distance and are reported as station examples.

4.11 KiK-net paired-sensor validation

KiK-net ground-surface and borehole rows are paired one-to-one by earthquake and site code. At each period, the station transfer proxy is the median $\log_{10}$ surface-to-borehole RotD100 ratio. Its Pearson and Spearman correlations with the primary surface station term are evaluated at sites with at least 20 paired records. A depth-adjusted correlation removes linear log-borehole-depth trends from both quantities before comparison.

The same five event groups used in the main holdout define a stricter prediction test. For each fold, training-event paired ratios are related by weighted linear regression to station terms fitted from training surface records. That calibration predicts station terms fitted independently to the held-out surface records, using only paired ratios from training events. Stations require 15 training pairs and five held-out surface records. A complementary waveform check uses 460 paired records from two earthquakes; demeaned and detrended horizontal traces provide Fourier surface-to-borehole ratios from 0.2 to 20 Hz. Neither paired-sensor calculation enters the station model or spectrum propagation.

4.12 Artificial intelligence use

The manuscript and code were written by the authors. ChatGPT was used only for language and formatting revision and code verification. The authors executed the code, inspected the source data and outputs, verified the reported values and references, and take responsibility for the study and final manuscript. No generative-AI image is included.

4.13 Data availability

The strong-motion flatfile is available under DOI <https://doi.org/10.17598/NIED.0032>. MF2013 coefficients and documentation are available at <https://www.j-shis.bosai.go.jp/labs/mf2013/en/>. J-SHIS response-spectrum map products are available from <https://www.j-shis.bosai.go.jp/>. Raw third-party records and map archives are not redistributed. Derived summary tables required to verify the reported results are supplied in the accompanying peer-review archive. The full derived release will be made public before publication.

4.14 Code availability

Analysis and figure-generation code is supplied in the accompanying peer-review archive. It includes environment specifications, reproduction commands and workflows for the primary and Zhao residual calculations, the MF2013 regression-domain screen, paired-sensor validation, uncertainty propagation, transfer tests, path stratification and balanced-field sensitivity. The same release will be made public at <https://github.com/zhouhaoyiu/japan-strong-motion-site-terms> and archived with a DOI before publication.

Author contributions

Haoyu Zhou designed the analysis, processed the public datasets, performed the computations, prepared the figures and wrote the manuscript. Qiang Ma supervised the study and reviewed the manuscript.

Competing interests

The authors declare no competing interests.

Funding

No specific funding supported this work.

Acknowledgements

The authors thank the National Research Institute for Earth Science and Disaster Resilience for making K-NET, KiK-net and J-SHIS data products publicly available.

References

- [1] Anderson, J. G. & Brune, J. N. Probabilistic seismic hazard analysis without the ergodic assumption. *Seismol. Res. Lett.* **70**, 19–28 (1999). <https://doi.org/10.1785/gssrl.70.1.19>.
- [2] Stewart, J. P., Afshari, K. & Goulet, C. A. Non-ergodic site response in seismic hazard analysis. *Earthq. Spectra* **33**, 1385–1414 (2017). <https://doi.org/10.1193/081716EQS135M>.
- [3] Lavrentiadis, G. et al. Overview and introduction to development of non-ergodic earthquake ground-motion models. *Bull. Earthq. Eng.* **21**, 5121–5150 (2023). <https://doi.org/10.1007/s10518-022-01485-x>.
- [4] Kuehn, N. M., Abrahamson, N. A. & Walling, M. A. Incorporating nonergodic path effects into the NGA-West2 ground-motion prediction equations. *Bull. Seismol. Soc. Am.* **109**, 575–585 (2019). <https://doi.org/10.1785/0120180260>.
- [5] Kuehn, N. M., Bozorgnia, Y., Campbell, K. W. & Gregor, N. A regionalized partially nonergodic ground-motion model for subduction earthquakes using the NGA-Sub database. *Earthq. Spectra* **39**, 1625–1657 (2023). <https://doi.org/10.1177/87552930231180906>.
- [6] Sung, C.-H., Miyake, H., Abrahamson, N. & Morikawa, N. Nonergodic ground-motion models for subduction zone and crustal earthquakes in Japan. *Bull. Seismol. Soc. Am.* **114**, 1717–1738 (2024). <https://doi.org/10.1785/0120230258>.
- [7] Sung, C.-H., Morikawa, N., Iwaki, A., Abrahamson, N. & Miyake, H. Ground-motion models incorporating nonergodic effects from 3D numerical simulations in Japan. *Bull. Seismol. Soc. Am.* **115**, 1852–1875 (2025). <https://doi.org/10.1785/0120240239>.
- [8] National Research Institute for Earth Science and Disaster Resilience. Strong Ground Motion Flat File. NIED, <https://doi.org/10.17598/NIED.0032> (2025).
- [9] Morikawa, N. et al. Flat file of K-NET and KiK-net strong-motion records. In *Proceedings of the 18th World Conference on Earthquake Engineering* (Milan, 2024). <https://www.j-shis.bosai.go.jp/en/labs/ground-motion-flatfile/>.
- [10] Kinoshita, S. Kyoshin Net K-NET. *Seismol. Res. Lett.* **69**, 309–332 (1998). <https://doi.org/10.1785/gssrl.69.4.309>.
- [11] Aoi, S., Kunugi, T. & Fujiwara, H. Strong-motion seismograph network operated by NIED K-NET and KiK-net. *J. Jpn. Assoc. Earthq. Eng.* **4**, 65–74 (2004). https://doi.org/10.5610/jaee.4.3_65.
- [12] Aoi, S. et al. MOWLAS NIED observation network for earthquake tsunami and volcano. *Earth Planets Space* **72**, 126 (2020). <https://doi.org/10.1186/s40623-020-01250-x>.

- [13] Morikawa, N. & Fujiwara, H. A new ground motion prediction equation for Japan applicable up to M9 mega-earthquake. *J. Disaster Res.* **8**, 878–888 (2013). <https://doi.org/10.20965/jdr.2013.p0878>.
- [14] Morikawa, N. & Fujiwara, H. Ground motion prediction equation based on Morikawa and Fujiwara 2013. J-SHIS/NIED, <https://www.j-shis.bosai.go.jp/labs/mf2013/en/> (2023).
- [15] Koketsu, K. & Miyake, H. A seismological overview of long-period ground motion. *J. Seismol.* **12**, 133–143 (2008). <https://doi.org/10.1007/s10950-007-9080-0>.
- [16] Yoshimoto, K. & Takemura, S. A study on the predominant period of long-period ground motions in the Kanto Basin Japan. *Earth Planets Space* **66**, 100 (2014). <https://doi.org/10.1186/1880-5981-66-100>.
- [17] Takemura, S. et al. Long-period ground motions in a laterally inhomogeneous large sedimentary basin. *Earth Planets Space* **67**, 33 (2015). <https://doi.org/10.1186/s40623-015-0201-7>.
- [18] Furumura, T. & Hayakawa, T. Anomalous propagation of long-period ground motions recorded in Tokyo during the 23 October 2004 Niigata-ken Chuetsu earthquake. *Bull. Seismol. Soc. Am.* **97**, 863–880 (2007). <https://doi.org/10.1785/0120060166>.
- [19] Dohi, Y. et al. Probabilistic seismic hazard analysis of response spectra: toward advanced national seismic hazard maps for Japan. *J. Jpn. Assoc. Earthq. Eng.* **24**, 1.124–1.147 (2024). https://doi.org/10.5610/jaee.24.1_124.
- [20] Zhao, J. X. et al. Attenuation relations of strong ground motion in Japan using site classification based on predominant period. *Bull. Seismol. Soc. Am.* **96**, 898–913 (2006). <https://doi.org/10.1785/0120050122>.
- [21] Pagani, M. et al. OpenQuake Engine: an open hazard and risk software for the Global Earthquake Model. *Seismol. Res. Lett.* **85**, 692–702 (2014). <https://doi.org/10.1785/0220130087>.
- [22] Kanno, T., Narita, A., Morikawa, N., Fujiwara, H. & Fukushima, Y. A new attenuation relation for strong ground motion in Japan based on recorded data. *Bull. Seismol. Soc. Am.* **96**, 879–897 (2006). <https://doi.org/10.1785/0120050138>.
- [23] Parker, G. A. & Stewart, J. P. Ergodic site response model for subduction zone regions. *Earthq. Spectra* **38**, 841–864 (2022). <https://doi.org/10.1177/87552930211056963>.
- [24] de la Torre, C. A. et al. Analysis of site-response residuals from empirical ground-motion models to account for observed sedimentary basin effects in Wellington New Zealand. *Earthq. Spectra* **40**, 2475–2503 (2024). <https://doi.org/10.1177/87552930241270562>.
- [25] Abrahamson, N., Kuehn, N., Walling, M. & Landwehr, N. Probabilistic seismic hazard analysis in California using nonergodic ground motion models. *Bull. Seismol. Soc. Am.* **109**, 1235–1249 (2019). <https://doi.org/10.1785/0120190030>.
- [26] Cornell, C. A. Engineering seismic risk analysis. *Bull. Seismol. Soc. Am.* **58**, 1583–1606 (1968). <https://doi.org/10.1785/BSSA0580051583>.
- [27] McGuire, R. K. Probabilistic seismic hazard analysis and design earthquakes closing the loop. *Bull. Seismol. Soc. Am.* **85**, 1275–1284 (1995). <https://doi.org/10.1785/BSSA0850051275>.
- [28] Azuma, H., Kawai, S. & Fujiwara, H. Development of J-SHIS and applications using API. *J. Disaster Res.* **8**, 869–877 (2013). <https://doi.org/10.20965/jdr.2013.p0869>.
- [29] Fujiwara, H., Morikawa, N. & Okumura, T. Seismic hazard assessment for Japan reconsiderations after the 2011 Tohoku earthquake. *J. Disaster Res.* **8**, 848–860 (2013). <https://doi.org/10.20965/jdr.2013.p0848>.
- [30] Fujiwara, H. et al. Improved seismic hazard assessment after the 2011 Great East Japan earthquake part 2. *Technical Note of the National Research Institute for Earth Science and Disaster Resilience* **490**, 1–388 (2023). <https://doi.org/10.24732/NIED.00003934>.
- [31] Earthquake Research Committee Subcommittee for Strong Ground Motion Evaluation. Probabilistic seismic hazard analysis of response spectra provisional edition. https://www.jishin.go.jp/evaluation/seismic_hazard_map/sh_response_spectrum/ (2022).
- [32] Morikawa, N., Kanno, T., Narita, A., Fujiwara, H. & Fukushima, Y. New additional correction terms for attenuation relations of peak amplitudes and response spectra corresponding to anomalous seismic intensity in northeastern Japan. *J. Jpn. Assoc. Earthq. Eng.* **6**, 23–41 (2006). <https://doi.org/10.5610/jaee.6.23>.
- [33] Morikawa, N. & Fujiwara, H. Ground motion prediction equation based on observation records during the 2011 Great Tohoku earthquake and its application to the Nankai Trough mega-earthquake. In *Proceedings of the 14th Japan Earthquake Engineering Symposium* (2014). <https://www.j-shis.bosai.go.jp/labs/mf2013/en/>.
- [34] Morikawa, N. & Fujiwara, H. An additional correction term of ground-motion prediction equation for intra-plate earthquakes. In *Japan Geoscience Union Meeting 2015*, SSS25-14 (2015). <https://doi.org/10.1186/1880-5981-66-100>.

[//www2.jpгу.org/meeting/2015/session/PDF/S-SS25/SSS25-14_E.pdf](http://www2.jpгу.org/meeting/2015/session/PDF/S-SS25/SSS25-14_E.pdf).