

Repeatable station terms redistribute long-period response spectra across Japanese strong-motion sites

Haoyu Zhou¹ and Qiang Ma^{1,*}

¹Institute of Engineering Mechanics, China Earthquake Administration, 29 Xuefu Road, Nangang District, Harbin 150080, China

*Correspondence: maqiang@iem.ac.cn

ORCID: Haoyu Zhou, 0009-0003-8817-1209; Qiang Ma, 0000-0002-9768-5223

Abstract

Station-associated ground-motion residuals can shift local response spectra, but their transfer depends on earthquake sample, backbone and path distribution. These dependencies must be quantified before station corrections enter hazard products. Here we present an analysis of 222,664 K-NET and KiK-net surface records using MF2013-compatible RotD100 spectra at eight periods from 0.1 to 5.0 s. At 3.0 s, station terms from disjoint event groups correlate at 0.921, and MF2013 and Zhao 2006 fields correlate at 0.770. Public site and location variables reduce spatial-block root mean squared error by 12.6% across 1,628 stations. Source-class fields remain closely aligned with the full field, whereas directional-sector correlations range from 0.280 to 0.886, revealing unresolved path conditioning. Cross-validated station multipliers span 0.624–1.338 at the 5th–95th percentiles and change the matched-station median surface spectrum from 0.081 to 0.075 g. The average station field is repeatable and hazard-relevant; source-specific use requires path-aware validation.

Keywords: strong-motion records; station terms; path effects; response spectra; Japan

1 Introduction

Regional ground-motion models assign a common median to recordings with similar source, path and site descriptors. Repeated recordings at the same station often remain systematically above or below that median, motivating nonergodic source, site and path terms[1–5]. Fully nonergodic models for Japan already resolve spatially varying source, site and path adjustments, and three-dimensional simulations provide an additional constraint on basin-related site terms[6, 7].

Japan offers an unusually dense test of station-specific residuals. The J-SHIS/NIED Strong Ground Motion Flat File links K-NET and KiK-net records to earthquake sources, distances and site metadata[8–12]. The Morikawa–Fujiwara 2013 model, hereafter MF2013, includes a magnitude-distance backbone and site terms based on AVS30 and D1400[13, 14]. AVS30 is the average shear-wave velocity in the upper 30 m, and D1400 is the depth to the 1.4 km s^{-1} shear-wave velocity horizon. Their period-dependent coefficients provide a direct test of shallow-soil and deep-sedimentary contributions.

Long-period motion is sensitive to sedimentary depth and basin geometry. Observations and simulations in Japan show persistent amplification and surface-wave effects at periods relevant to large basins and long-period structures[15–18]. A station residual in this band can combine

local response, unresolved path structure and sensor effects. Japan’s provisional probabilistic response-spectrum maps provide an engineering-bedrock coordinate on which such a correction can be tested[19].

We examine how much of the event-adjusted station field survives changes in earthquake sample, ground-motion backbone and path distribution, then propagate only out-of-fold station predictions to matched J-SHIS response spectra. Event groups, a Zhao 2006 calculation, spatial blocks, network and regional transfer, event deletion, and path-stratified residuals provide separate tests. The average field recurs across random event groups and remains partly predictable at held-out sites. Directional and short-distance subsets expose a source-path dependence that limits event-specific transfer. The spectrum calculation consequently represents an average-path station sensitivity on the published hazard coordinate.

2 Results

2.1 Surface-record residuals

The flatfile contains 333,808 records, including paired surface and borehole KiK-net sensors. The primary calculation retains only installations coded as ground surface. The MF2013 screen then yields 222,664 records from 1,880 surface stations and 1,737 earthquakes at each period. Among these stations, 1,628 have at least 20 records and enter the station-level analysis. Their distribution covers the Japanese islands, and the earthquake set includes crustal, interplate and intraplate sources (Fig. 1a).

The D1400 and AVS30 terms improve the residual fit most strongly between 1 and 3 s. Their reduction in mean absolute residual is 3.0% at 0.1 s and 14.0% at 1.0 s, reaches 20.0% and 21.4% at 2.0 and 3.0 s, and decreases to 16.2% at 5.0 s (Fig. 1b; Table 1; Supplementary Table 1). Every period is read directly from the flatfile RotD100 spectrum.

For each period, the residual is separated into a global intercept, an event term, a station term and a record remainder. The station component is larger at short periods and decreases towards 5.0 s, while the event and record components vary less across period (Fig. 1c). The global intercept is retained as a model offset and is excluded from the station correction.

2.2 Station terms recur across events

Station terms estimated from disjoint event groups remain strongly correlated. At 3.0 s, each test group contains about 347 earthquakes, and an average of 1,487 stations meet the train and test record thresholds. The mean train-test correlation is 0.921. Applying the training-event station term to the test-event station mean reduces root mean squared error by 74.5% relative to a zero term. Correlations range from 0.916 to 0.958 across 0.1–5.0 s, and the period-specific reductions range from 72.4% to 81.6% (Fig. 1d; Supplementary Fig. 1; Supplementary Table 2).

The MF2013 site terms remove most of the long-period association with D1400. At 3.0 s, the event-adjusted station correlation with D1400 decreases from 0.751 for the magnitude-distance backbone to 0.194 after the D1400 and AVS30 terms are added (Fig. 2a,c). The corresponding correlation with basement depth decreases but remains positive (Fig. 2b). The residual field still

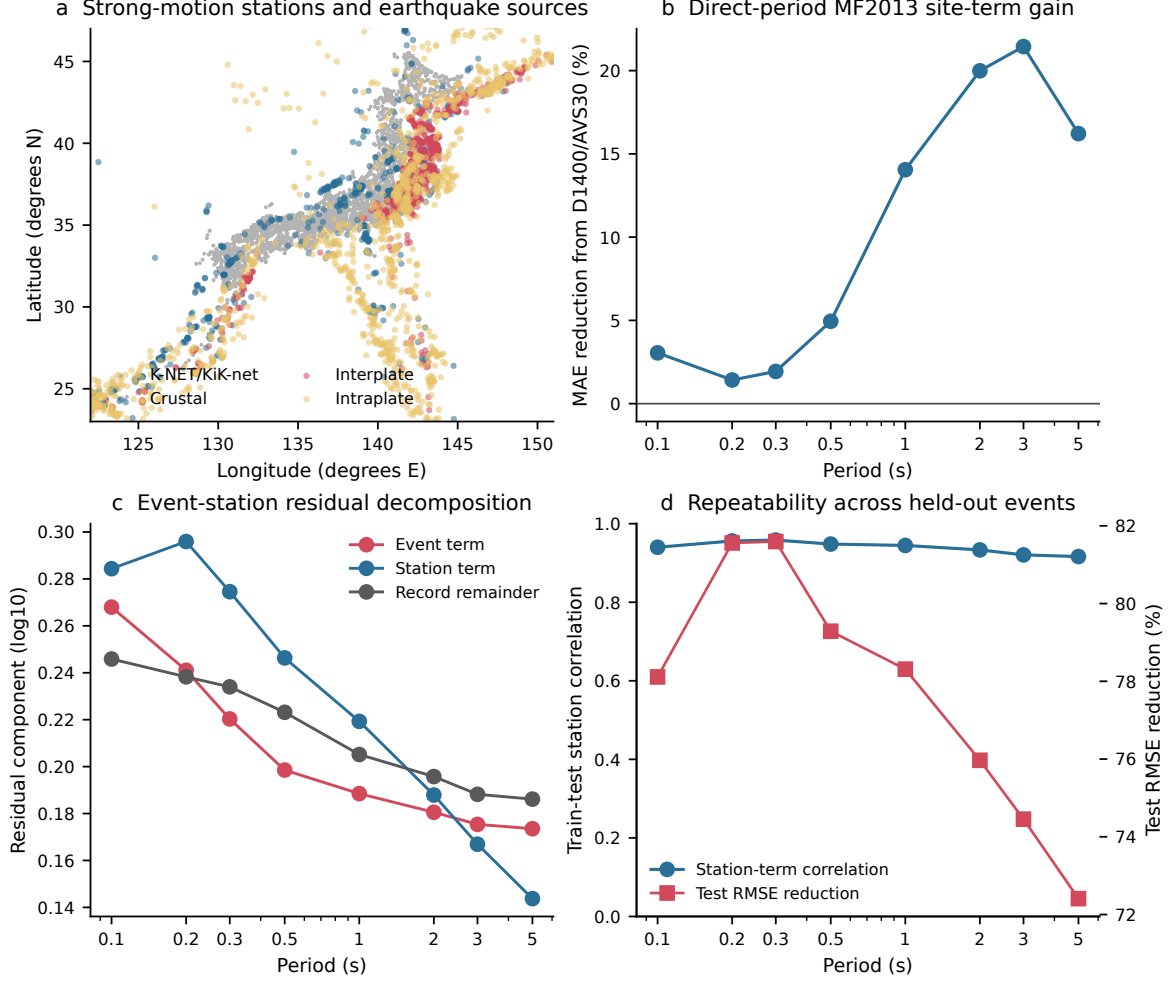


Figure 1. Data coverage and residual decomposition. **a**, K-NET and KiK-net stations and earthquake sources used in the residual calculation. **b**, Reduction in mean absolute residual after adding the MF2013 D1400 and AVS30 terms at directly observed periods. **c**, record-weighted standard deviations of the event and station terms and the root mean squared record remainder. **d**, repeatability of station terms across five held-out event groups. Blue circles show the mean train-test station-term correlation; red squares show the mean reduction in test root mean squared error relative to a zero station term.

contains basin or spatial structure beyond the two MF2013 site variables.

An approximate application of the MF2013 anomalous-intensity term changes individual residuals but preserves the station field. At 3.0 s, primary and sensitivity station terms correlate at 0.971, and the D1400 correlation changes from 0.194 to 0.206 (Fig. 2d). The main period pattern is insensitive to this approximation.

2.3 Station patterns persist under a second model

We repeated the residual decomposition with the Zhao et al. 2006 model as implemented in OpenQuake[20, 21]. The source-class-specific active-crustal, interface and intraslab variants use the same surface observations, source classes, AVS30 values and documented shortest fault distances. At 3.0 s, the MF2013 and Zhao station terms correlate at 0.770 across 1,628 stations; the record-weighted correlation is 0.735, and the median absolute difference is 0.151 $\log_{10}$ units (Fig. 3; Supplementary Table 3). Their signs agree at 77.5% of stations. Correlations decrease

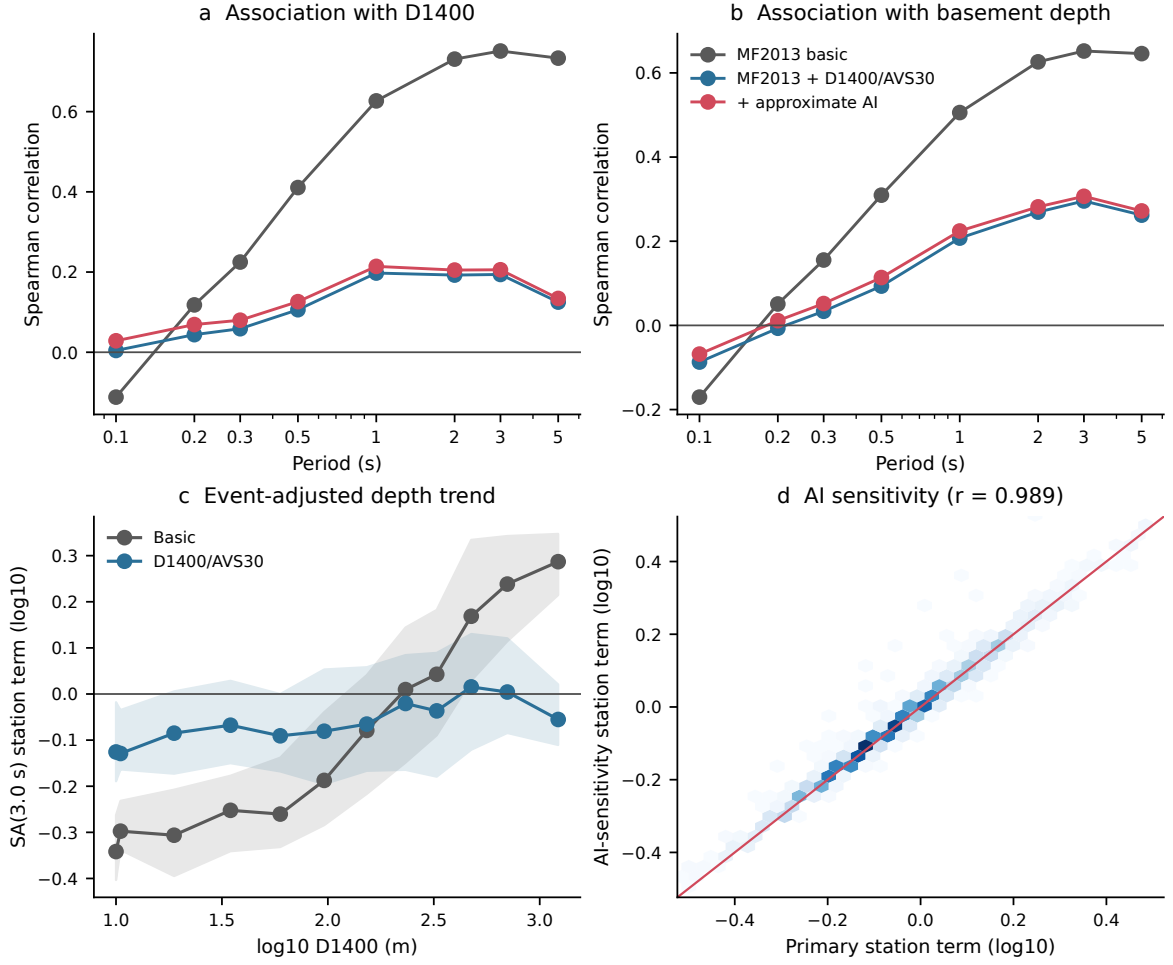


Figure 2. Event-adjusted station terms and sedimentary-depth variables. **a**, Spearman correlations between station terms and D1400. **b**, correlations with basement depth. Grey denotes the MF2013 magnitude-distance backbone, blue includes D1400 and AVS30, and red adds the rule-based anomalous-intensity sensitivity. **c**, binned SA(3.0 s) station terms against D1400 before and after the site terms; lines show bin medians and bands show interquartile ranges. **d**, comparison between primary and anomalous-intensity sensitivity station terms at 3.0 s.

from 0.953 at 0.1 s to 0.697 at 5.0 s, showing greater backbone dependence at long periods while retaining a common average ordering.

The Zhao residuals also repeat across held-out event groups. Their 3.0 s train-test correlation is 0.961, and the site-and-location model reduces spatial-block root mean squared error by 37.7%, with an observed-predicted correlation of 0.792. This comparison changes the backbone while retaining the observation set and validation design; it is a model sensitivity test, not an independent dataset.

2.4 Site and location variables predict held-out stations

The physical model uses shallow velocities, sedimentary depths, elevation, sensor depth and network. At 3.0 s its spatial-block root mean squared error is 2.3% higher than the zero-term baseline. Adding longitude, latitude and volcanic-front distances changes the result to a 12.6% reduction, with an observed-predicted correlation of 0.500. The five held-out blocks improve by 10.2% to 34.1%. Measured one-dimensional site descriptors retain physical associations with the

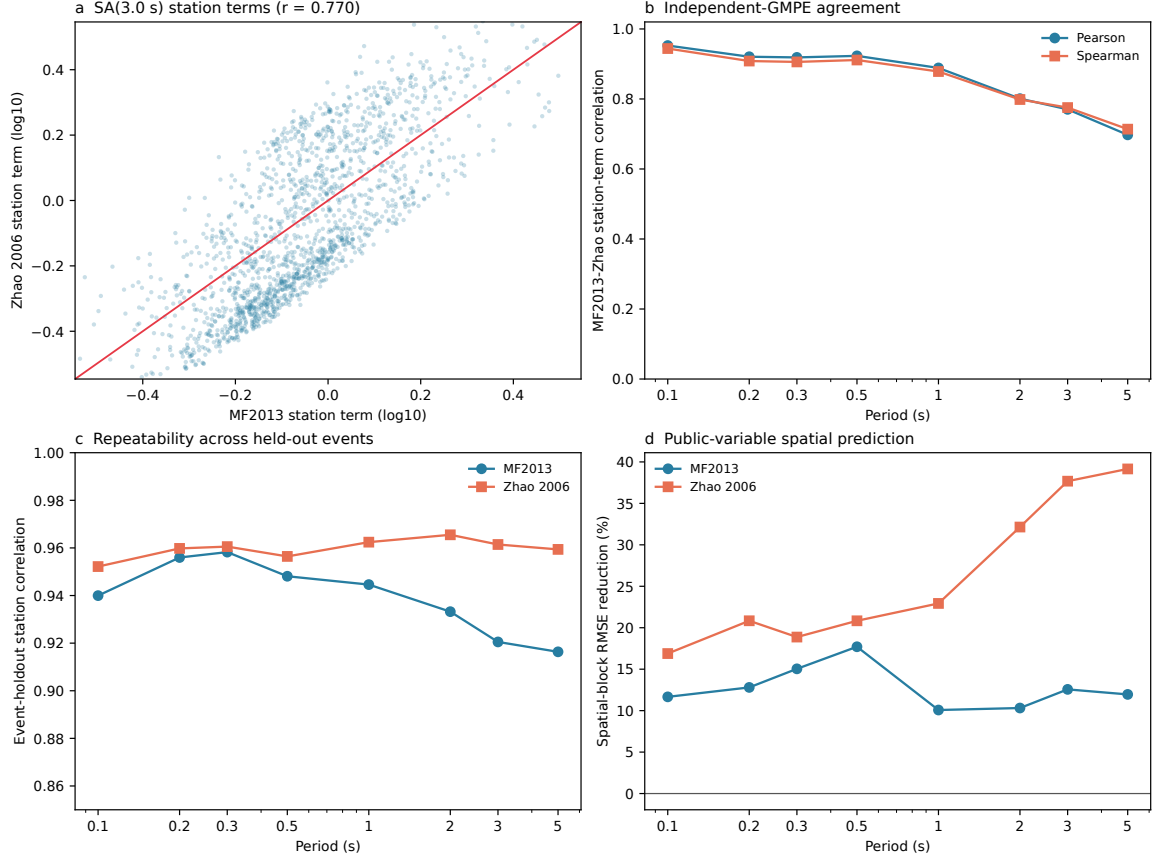


Figure 3. Ground-motion-model sensitivity of the station field. **a**, MF2013 and Zhao 2006 station terms at 3.0 s. **b**, station-term correlations across the eight direct periods. **c**, event-group repeatability for both residual models. **d**, spatial-block root mean squared error reduction for the site-and-location model. Both residual calculations use the same surface records.

Table 1. Direct period residual and prediction results

Period (s)	MAE gain (%)	D1400 correlation		Event holdout correlation	Spatial model RMSE gain (%)
		Basic	Site		
0.1	3.0	-0.112	0.004	0.940	11.7
0.2	1.4	0.118	0.044	0.956	12.8
0.3	1.9	0.225	0.059	0.958	15.0
0.5	4.9	0.411	0.106	0.948	17.7
1.0	14.0	0.627	0.198	0.945	10.1
2.0	20.0	0.731	0.192	0.933	10.3
3.0	21.4	0.751	0.194	0.921	12.6
5.0	16.2	0.733	0.125	0.916	12.0

residuals, while spatial information is required for out-of-block prediction.

The site-and-location model improves on the zero baseline at every direct period. Root mean squared error reductions are 10.1%, 10.3%, 12.6% and 12.0% at 1.0, 2.0, 3.0 and 5.0 s, respectively (Fig. 4b; Supplementary Fig. 2; Supplementary Table 4). A common-feature model that excludes VS20, VS30 and network identity also transfers between K-NET and KiK-net. At 3.0 s it reduces error by 8.7% when K-NET is held out and by 20.5% when KiK-net is held out. Fixed macroregion tests are less uniform: the full model improves all five regions by 5.4% to 28.9%, whereas the common-feature sensitivity changes from -5.2% to 27.5% (Supplementary

Fig. 3; Supplementary Table 5). Joint deletion of the ten highest-count events leaves station-term correlations above 0.9989 at every period and changes the 3.0 s field by 0.012 $\log_{10}$ units at its record-weighted 95th percentile (Supplementary Table 6).

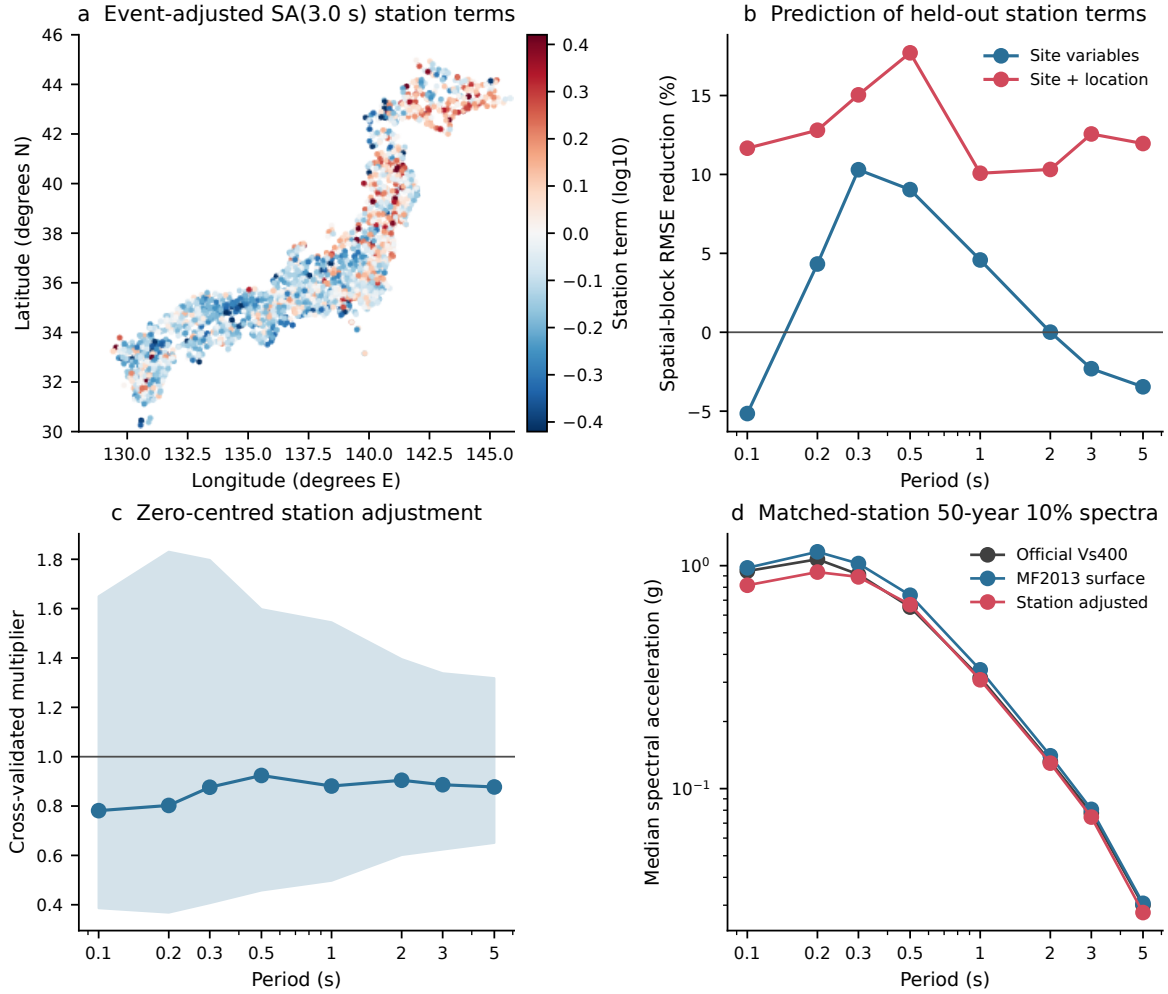


Figure 4. Prediction and response-spectrum propagation. **a**, event-adjusted SA(3.0 s) station terms at stations with at least 20 records. **b**, spatial-block root mean squared error reduction for models using site variables and site plus location variables. **c**, median and 5th–95th percentile range of zero-centred cross-validated station multipliers. **d**, matched-station median 50-year 10% response spectra on official $V_S = 400 \text{ m s}^{-1}$ engineering bedrock, after projection to the station surface condition, and after the station adjustment. All periods are calculated directly.

2.5 Path strata expose conditional transfer

Random event holdout preserves the broad path distribution seen by each station. We re-estimated station terms within four hypocentral-bearing sectors, four shortest-fault-distance bins and the three source classes. At 3.0 s, source-class fields correlate at 0.924–0.942 with the full field, and the 100–300 km distance fields correlate at 0.963–0.974. Directional-sector correlations span 0.280–0.886, while correlations within disjoint event halves of the same sectors span 0.762–0.967 (Fig. 5; Supplementary Table 7). High within-sector repeatability alongside low full-field agreement shows a systematic directional component.

Equal weighting across available path strata retains a weaker persistent component. At 1–3

s, models fitted to azimuth-, distance- and source-class-balanced fields reduce overall spatial-block error by 2.5%–9.6%. Several individual spatial blocks have negative gains, including the azimuth-balanced 3.0 s field (Supplementary Fig. 4; Supplementary Table 8). Public station variables predict an average component of the residual field, but their transfer is conditional on path coverage.

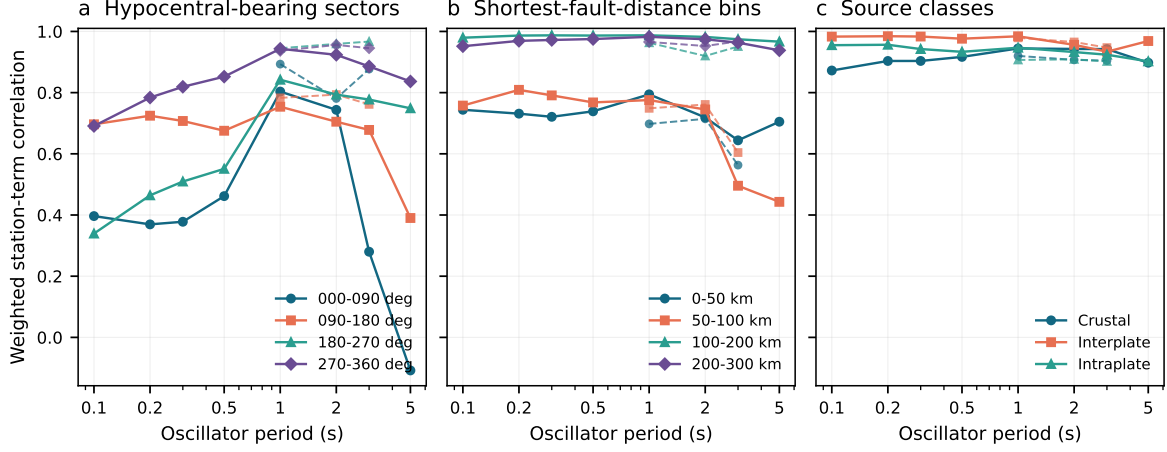


Figure 5. Path and source stratification of the station field. **a**, hypocentral-bearing sectors. **b**, shortest-fault-distance bins. **c**, source classes. Solid lines compare each stratum field with the full station field at all eight periods. Dashed lines show mean correlations between five pairs of disjoint event halves at 1.0, 2.0 and 3.0 s. Disconnected station-event graphs are solved and aligned by component before comparison.

2.6 Local spectra change in both directions

The predicted station terms are centred to zero in log space before propagation. At 3.0 s, their multipliers have 5th, 50th and 95th percentiles of 0.624, 0.886 and 1.338 (Fig. 4c). The corresponding local changes are -37.6% , -11.4% and $+33.8\%$. At 5.0 s, the 5th and 95th percentiles are 0.651 and 1.318.

Official J-SHIS response-spectrum ordinates are defined on engineering bedrock with $V_S = 400 \text{ m s}^{-1}$. At each matched station, we replace the MF2013 shallow-soil factor for 400 m s^{-1} with the factor for the station AVS30. For the 50-year 10% probability level at 3.0 s, the median official ordinate is 0.078 g and the median surface-reference ordinate is 0.081 g. Applying the cross-validated station multiplier changes the median to 0.075 g (Fig. 4d; Supplementary Fig. 5; Supplementary Table 9). The global MF2013 residual offset is excluded from this station correction.

Spatial-block errors provide a separate empirical prediction interval for each held block. At 3.0 s, the nominal 90% interval covers 89.0% of stations and 88.8% after record-count weighting; its median upper-to-lower multiplier span is 3.00 (Supplementary Fig. 6; Supplementary Table 10). These intervals quantify station-model error under the spatial validation design. They do not include source recurrence, ground-motion-model or J-SHIS logic-tree uncertainty.

City-nearest matched stations illustrate the bidirectional effect. At 3.0 s, the cross-validated changes are -2.5% near Tokyo, -11.5% near Osaka, $+31.2\%$ near Sapporo, -11.0% near Sendai and -25.2% near Fukuoka (Fig. 6; Supplementary Table 11). These values describe the nearest

analysed station, not a city-wide correction.

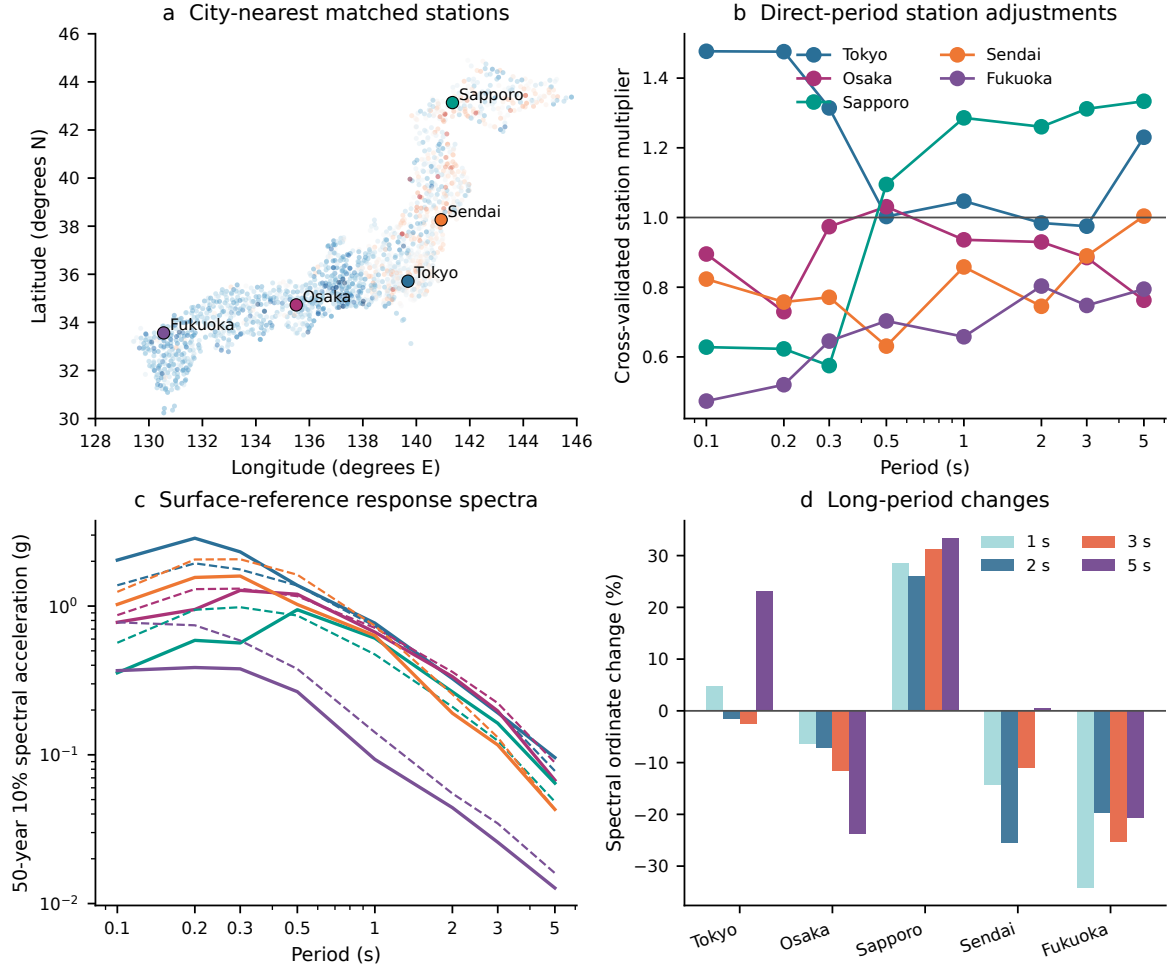


Figure 6. Illustrative city-nearest station cases. **a**, analysed stations nearest to five Japanese cities. **b**, direct-period cross-validated multipliers at the selected stations. **c**, 50-year 10% surface-reference response spectra before and after the station adjustment; dashed and solid lines denote the two spectra. **d**, percentage changes at 1.0, 2.0, 3.0 and 5.0 s. Distances to the selected stations are 2.4 km for Tokyo, 3.6 km for Osaka, 8.6 km for Sapporo, 5.0 km for Sendai and 14.1 km for Fukuoka.

3 Discussion

Fully nonergodic Japanese ground-motion models already separate spatially varying source, site and path terms, and three-dimensional simulations add physical constraints on basin response[6, 7]. The present results address the transfer of a simpler station field derived from public flatfile variables and its connection to an official response-spectrum product. MF2013 D1400 and AVS30 terms remove much of the 1–5 s sedimentary-depth trend, while the remaining field recurs across random event groups and retains a common ordering under Zhao 2006. Regional site-response models and residual-based basin analyses provide a complementary scale for interpreting the remaining spatial structure[22, 23].

The response-component audit separates amplitude coordinates from spatial structure. RotD100 matches the MF2013 horizontal-vector target. At 3.0 s, RotD50 and RotD100 sta-

tion fields correlate at 0.9986 and differ by 0.018 $\log_{10}$ units at the 95th percentile, although their record-level median ratio is 0.819 and their remainder dispersions differ. The station ordering is stable under component choice; absolute residual levels and variability require the model-compatible coordinate.

Random event holdout retains the broad path mixture and leaves path invariance untested. The 3.0 s field for the 000–090° sector is internally repeatable across disjoint event halves at 0.877, yet correlates with the full field at 0.280. Source-class fields are much more stable, and the 100–300 km distance fields closely follow the full ordering. These contrasts are consistent with station-specific path structure that changes with direction and distance, the mechanisms represented explicitly by path terms in fully nonergodic models[6]. The empirical quantity used here is a station-associated average over the observed source-path distribution.

Public site and location variables recover part of that average field. The 3.0 s spatial-block gain is 12.6%, all five primary folds improve, and the common-feature model transfers in both directions between K-NET and KiK-net. Equal-stratum fields remain predictable in aggregate, with 1–3 s gains of 2.5%–9.6%, but several individual spatial folds deteriorate. The model supports interpolation within well-sampled parts of the existing network. New regions and source-path distributions require local records or an explicit path model.

The spectrum calculation keeps the official $V_S = 400 \text{ m s}^{-1}$ ordinate, the MF2013 surface projection and the zero-centred station adjustment as separate quantities. At 3.0 s, the central 90% of point multipliers spans 0.624–1.338; the empirical station-model interval has a median upper-to-lower factor of 3.00. The matched-mesh calculation retains source recurrence, aleatory variability and logic-tree aggregation from the published J-SHIS product[24–30]. Its values describe an average-path sensitivity. Source-specific use would require hazard deaggregation and path-conditioned terms inside the hazard integral.

The flatfile covers events with $M_w \geq 5$ and fault distance no greater than 300 km. The anomalous-intensity term uses an approximate public rule because event plate membership is incomplete. Zhao receives shortest fault distance as rupture distance and AVS30 as VS30, and RotD50 serves as the closest available orientation-independent coordinate to its geometric-mean target. The two-event KiK-net waveform analysis confirms frequency-dependent surface-to-borehole response (Supplementary Fig. 7); its sample does not support calibration of a nonlinear transfer model.

Across eight direct periods, the Japanese surface-record archive contains a repeatable station-associated field that changes matched long-period response spectra in both directions. Its average component is partly predictable from public site and location variables. Directional and short-distance tests identify the missing path dependence and define the additional information required before source-specific hazard application.

4 Methods

4.1 Strong motion data

We used the public `sub1-v2024` subset of the J-SHIS/NIED Strong Ground Motion Flat File[8, 9]. It contains 333,808 records with moment magnitude $M_w \geq 5$ and shortest fault distance no greater than 300 km. Record, source and site tables were joined through `smrec_id`, `eq_source_id` and `site_id`. K-NET and KiK-net provide the observations and metadata[10–12]. The official installation code identifies ground-surface and borehole sensors separately. The primary residual and spectrum analyses use ground-surface installations only; KiK-net borehole records enter only the waveform comparison.

MF2013 predicts the maximum norm of the two horizontal linear-oscillator responses, which is equivalent to RotD100. The primary analysis reads 5%-damped RotD100 spectral acceleration at 0.1, 0.2, 0.3, 0.5, 1.0, 2.0, 3.0 and 5.0 s[19]. Every value comes from its corresponding flatfile column. Records require positive spectral acceleration and distance, finite magnitude and model inputs, an MF2013 source class, positive AVS30 and a ground-surface installation code. These criteria retain 222,664 records at each period. RotD50 residuals are retained for a component sensitivity. At 3.0 s, the RotD50 and RotD100 station fields correlate at 0.9986 and differ by 0.018 $\log_{10}$ units at the 95th percentile (Supplementary Table 12).

4.2 MF2013 residuals

The MF2013 magnitude-distance prediction follows the published coefficients[13, 14]. The site calculation adds

$$G_d(T) = p_d(T) \log_{10} \left[\frac{\max(D_{l\min}(T), D_{1400})}{300} \right] \quad (1)$$

and

$$G_s(T) = p_s(T) \log_{10} \left[\frac{\min(V_{S\max}(T), AVS30)}{350} \right]. \quad (2)$$

Residuals are $r_{ij}(T) = \log_{10} Y_{ij}(T) - \log_{10} \hat{Y}_{ij}(T)$ for station i and event j . The anomalous-intensity sensitivity follows the published northeastern and southwestern geographic and depth rules[31, 32]. It is labelled as a sensitivity because the flatfile does not provide an explicit plate-membership flag for every event. The Philippine Sea Plate correction is an event-level constant at a given period[33]; it is represented by the fitted event term for station-effect estimation.

4.3 Event and station decomposition

For each period and MF2013 variant, we fit

$$r_{ij}(T) = \mu(T) + \delta E_j(T) + \delta S_i(T) + \epsilon_{ij}(T), \quad (3)$$

where μ is the global intercept, δE_j is the event term, δS_i is the station term and ϵ_{ij} is the record remainder. Alternating grouped least squares estimates the event and station terms. Record-count-weighted means of δE and δS are constrained to zero. We fit three variants at each period: the magnitude-distance backbone, the D1400/AVS30 site model and the site model

with the anomalous-intensity sensitivity. Iteration stops when the largest parameter change is below $10^{-10} \log_{10}$ units or after 5,000 iterations. All 24 period-model combinations converged; the largest final change was 9.99×10^{-11} and the largest iteration count was 1,161. Stations require at least 20 records for association and prediction analyses.

For the event holdout, earthquakes are randomly assigned to five groups with a fixed seed. Each fold estimates a station term from the other four groups after subtracting the mean residual of each training event. The same operation is applied independently to the test events. Stations require at least 15 training records and five test records. We report the train-test station correlation and the record-weighted test root mean squared error reduction relative to zero.

4.4 Alternative ground-motion-model sensitivity

The Zhao et al. 2006 active-crustal, interface and intraslab equations are evaluated with OpenQuake Engine 3.25.1[20, 21]. Source type selects the equation branch, the documented shortest fault distance supplies rupture distance, AVS30 supplies VS30, and the flatfile hypocentral depth and crustal rake complete the required context. OpenQuake defines Zhao for the geometric mean of two horizontal components; RotD50 is the closest orientation-independent response coordinate available in the flatfile and is used for this calculation. Predictions are evaluated at the same eight periods and surface-record sample as MF2013. The event-station decomposition, event holdout and spatial-block prediction retain the same thresholds and folds. This calculation measures backbone sensitivity within one observational archive.

4.5 Spatial station prediction

Two histogram gradient-boosting regressors predict the event-adjusted station term. The physical model uses log-transformed VS10, VS20, VS30, AVS30, D1100, D1400, D1700, D2100 and basement depth, together with elevation, sensor depth and network. The site-and-location model adds longitude, latitude and the two volcanic-front distance fields. Missing numeric values are median-imputed within each training fold; network is mode-imputed and one-hot encoded.

Both models use squared-error loss, learning rate 0.04, 400 iterations, 15 maximum leaf nodes, 35 minimum samples per leaf and L2 regularisation 0.1. Five spatial blocks are formed by k -means clustering of standardised station coordinates. Each station is predicted only by the model trained on the other four blocks. Out-of-fold predictions are centred to zero using station record counts before conversion to multipliers $f_i(T) = 10^{\widehat{\delta S}_i(T)}$. The zero station term is the baseline. Reported errors are weighted by the number of records at each station.

4.6 Transfer and event-influence tests

Cross-network tests train on one surface network and evaluate the other. A common-feature variant excludes VS20, VS30 and network identity because their completeness differs between K-NET and KiK-net; it retains VS10, AVS30, sedimentary depths, elevation, sensor depth, coordinates and volcanic-front distances. Five fixed macroregions provide a second geographic leaveout test. Event influence is evaluated by removing each of the ten events with the largest

3.0 s record count and by removing all ten together at every period. Perturbed station terms are aligned to the full record-weighted zero reference before comparison.

4.7 Path and source stratification

The MF2013 RotD100 records are divided into four hypocentral-bearing sectors (000–090°, 090–180°, 180–270° and 270–360°), four shortest-fault-distance bins (0–50, 50–100, 100–200 and 200–300 km), and crustal, interplate and intraplate source classes. Bearing is the initial great-circle direction from the source horizontal coordinates to the station. Station-event graphs can become disconnected after stratification. Each connected component is solved by sparse least squares, and components with at least ten stations having ten records are aligned separately to the full station field. Five repeated event splits estimate within-stratum sampling reliability at 1.0, 2.0 and 3.0 s; each half requires five records per station.

For a persistent-field sensitivity, component-aligned station terms are averaged with equal weight across the available strata of each dimension. A station contributes when at least two azimuth sectors, distance bins or source classes are available. The physical and site-and-location models are refitted to each balanced field with the same five-block clustering procedure and hyperparameters used for the primary target. Strata receive equal weight in the target; prediction errors retain station record-count weights.

4.8 Station-model prediction intervals

For each held spatial block, signed out-of-fold errors from the other four blocks define record-weighted 5th and 95th percentiles. Adding these error quantiles to the held-block point prediction gives an empirical 90% station-term interval. Coverage is evaluated separately for each held block and then pooled by period. The lower and upper terms are converted to multipliers and propagated through the same response-spectrum calculation as the point estimate. These bounds cover station-model prediction error only.

4.9 Response spectrum propagation

We read official J-SHIS 2020 response-spectrum map ordinates at the same eight periods and at 50-year exceedance probabilities of 2%, 5%, 10% and 39% [27, 29, 30]. The maps define spectral acceleration on engineering bedrock with $V_S = 400 \text{ m s}^{-1}$. For station i , the surface-reference factor is

$$F_{\text{surf},i}(T) = 10^{G_s(AS30_i,T) - G_s(400,T)}. \quad (4)$$

The ergodic surface ordinate is $S_{\text{surf},i} = S_{400,i} F_{\text{surf},i}$, and the station-adjusted ordinate is

$$S_{\text{adj},i}(T) = S_{\text{surf},i}(T) 10^{\widehat{\delta S}_i(T)}. \quad (5)$$

Only out-of-fold station predictions enter this calculation. Quantiles are evaluated over the 1,628 matched surface stations. The correction represents the average source-path distribution in the strong-motion archive. City cases use the nearest matched station by great-circle distance and are reported as station examples.

4.10 KiK-net waveform check

An independent waveform check uses 460 paired KiK-net surface and downhole records from two earthquakes. Traces are demeaned and detrended, horizontal amplitudes are calculated from the two horizontal components, and surface-to-downhole Fourier amplitude ratios are summarised from 0.2 to 20 Hz. This analysis tests whether the observed network data contain frequency-dependent surface response; it does not enter the residual model or the response-spectrum propagation.

4.11 Artificial intelligence use

The manuscript and code were written by the authors. ChatGPT was used to assist language and formatting revision and code review. The authors executed the code, inspected the source data and outputs, verified the reported values and references, and take responsibility for the study and final manuscript. No generative-AI image is included.

4.12 Data availability

The strong-motion flatfile is available under DOI <https://doi.org/10.17598/NIED.0032>. MF2013 coefficients and documentation are available at <https://www.j-shis.bosai.go.jp/labs/mf2013/en/>. J-SHIS response-spectrum map products are available from <https://www.j-shis.bosai.go.jp/>. Raw third-party records and map archives are not redistributed. Derived tables used in the main figures and Supplementary Information are included in the project repository at <https://github.com/zhouhaoyiu/japan-strong-motion-site-terms>.

4.13 Code availability

Analysis and figure-generation code is available at <https://github.com/zhouhaoyiu/japan-strong-motion-site-terms>. The primary analysis, Zhao sensitivity, uncertainty propagation, transfer tests, path stratification and balanced-field sensitivity are implemented in `work/jshis_event_adjusted_station_model.py`, `work/jshis_independent_gmpe_replication.py`, `work/jshis_station_uncertainty_propagation.py`, `work/jshis_robustness_stress_tests.py`, `work/jshis_path_stratification_audit.py` and `work/jshis_balanced_station_model.py`. The repository includes environment requirements and relative-path commands for reproducing the derived tables after the public inputs are downloaded.

Author contributions

H.Z. designed the analysis, processed the public datasets, performed the computations, prepared the figures, and wrote the manuscript. Q.M. supervised the study and reviewed the manuscript.

Competing interests

The authors declare no competing interests.

Funding

No specific funding supported this work.

Acknowledgements

The authors thank the National Research Institute for Earth Science and Disaster Resilience for making K-NET, KiK-net and J-SHIS data products publicly available.

References

- [1] Anderson, J. G. & Brune, J. N. Probabilistic seismic hazard analysis without the ergodic assumption. *Seismol. Res. Lett.* **70**, 19–28 (1999). <https://doi.org/10.1785/gssrl.70.1.19>.
- [2] Stewart, J. P., Afshari, K. & Goulet, C. A. Non-ergodic site response in seismic hazard analysis. *Earthq. Spectra* **33**, 1385–1414 (2017). <https://doi.org/10.1193/081716EQS135M>.
- [3] Lavrentiadis, G. et al. Overview and introduction to development of non-ergodic earthquake ground-motion models. *Bull. Earthq. Eng.* **21**, 5121–5150 (2023). <https://doi.org/10.1007/s10518-022-01485-x>.
- [4] Kuehn, N. M., Abrahamson, N. A. & Walling, M. A. Incorporating nonergodic path effects into the NGA-West2 ground-motion prediction equations. *Bull. Seismol. Soc. Am.* **109**, 575–585 (2019). <https://doi.org/10.1785/0120180260>.
- [5] Kuehn, N. M., Bozorgnia, Y., Campbell, K. W. & Gregor, N. A regionalized partially nonergodic ground-motion model for subduction earthquakes using the NGA-Sub database. *Earthq. Spectra* **39**, 1625–1657 (2023). <https://doi.org/10.1177/87552930231180906>.
- [6] Sung, C.-H., Miyake, H., Abrahamson, N. & Morikawa, N. Nonergodic ground-motion models for subduction zone and crustal earthquakes in Japan. *Bull. Seismol. Soc. Am.* **114**, 1717–1738 (2024). <https://doi.org/10.1785/0120230258>.
- [7] Sung, C.-H., Morikawa, N., Iwaki, A., Abrahamson, N. & Miyake, H. Ground-motion models incorporating nonergodic effects from 3D numerical simulations in Japan. *Bull. Seismol. Soc. Am.* **115**, 1852–1875 (2025). <https://doi.org/10.1785/0120240239>.
- [8] National Research Institute for Earth Science and Disaster Resilience. Strong Ground Motion Flat File. NIED, <https://doi.org/10.17598/NIED.0032> (2025).
- [9] Morikawa, N. et al. Flat file of K-NET and KiK-net strong-motion records. In *Proceedings of the 18th World Conference on Earthquake Engineering* (Milan, 2024). <https://www.j-shis.bosai.go.jp/en/labs/ground-motion-flatfile/>.
- [10] Kinoshita, S. Kyoshin Net K-NET. *Seismol. Res. Lett.* **69**, 309–332 (1998). <https://doi.org/10.1785/gssrl.69.4.309>.
- [11] Aoi, S., Kunugi, T. & Fujiwara, H. Strong-motion seismograph network operated by NIED K-NET and KiK-net. *J. Jpn. Assoc. Earthq. Eng.* **4**, 65–74 (2004). https://doi.org/10.5610/jaee.4.3_65.
- [12] Aoi, S. et al. MOWLAS NIED observation network for earthquake tsunami and volcano. *Earth Planets Space* **72**, 126 (2020). <https://doi.org/10.1186/s40623-020-01250-x>.
- [13] Morikawa, N. & Fujiwara, H. A new ground motion prediction equation for Japan applicable up to M9 mega-earthquake. *J. Disaster Res.* **8**, 878–888 (2013). <https://doi.org/10.20965/jdr.2013.p0878>.
- [14] Morikawa, N. & Fujiwara, H. Ground motion prediction equation based on Morikawa and Fujiwara 2013. J-SHIS/NIED, <https://www.j-shis.bosai.go.jp/labs/mf2013/en/> (2023).

- [15] Koketsu, K. & Miyake, H. A seismological overview of long-period ground motion. *J. Seismol.* **12**, 133–143 (2008). <https://doi.org/10.1007/s10950-007-9080-0>.
- [16] Yoshimoto, K. & Takemura, S. A study on the predominant period of long-period ground motions in the Kanto Basin Japan. *Earth Planets Space* **66**, 100 (2014). <https://doi.org/10.1186/1880-5981-66-100>.
- [17] Takemura, S. et al. Long-period ground motions in a laterally inhomogeneous large sedimentary basin. *Earth Planets Space* **67**, 33 (2015). <https://doi.org/10.1186/s40623-015-0201-7>.
- [18] Furumura, T. & Hayakawa, T. Anomalous propagation of long-period ground motions recorded in Tokyo during the 23 October 2004 Niigata-ken Chuetsu earthquake. *Bull. Seismol. Soc. Am.* **97**, 863–880 (2007). <https://doi.org/10.1785/0120060166>.
- [19] Dohi, Y., Shigeno, N., Morikawa, N., Fujiwara, H., Nojima, N. & Iwata, T. Probabilistic seismic hazard analysis of response spectra: toward advanced national seismic hazard maps for Japan. *J. Jpn. Assoc. Earthq. Eng.* **24**, 124–147 (2024). https://doi.org/10.5610/jaee.24.1_124.
- [20] Zhao, J. X. et al. Attenuation relations of strong ground motion in Japan using site classification based on predominant period. *Bull. Seismol. Soc. Am.* **96**, 898–913 (2006). <https://doi.org/10.1785/0120050122>.
- [21] Pagani, M. et al. OpenQuake Engine: an open hazard and risk software for the Global Earthquake Model. *Seismol. Res. Lett.* **85**, 692–702 (2014). <https://doi.org/10.1785/0220130087>.
- [22] Parker, G. A. & Stewart, J. P. Ergodic site response model for subduction zone regions. *Earthq. Spectra* **38**, 841–864 (2022). <https://doi.org/10.1177/87552930211056963>.
- [23] de la Torre, C. A. et al. Analysis of site-response residuals from empirical ground-motion models to account for observed sedimentary basin effects in Wellington New Zealand. *Earthq. Spectra* **40**, 2475–2503 (2024). <https://doi.org/10.1177/87552930241270562>.
- [24] Abrahamson, N., Kuehn, N., Walling, M. & Landwehr, N. Probabilistic seismic hazard analysis in California using nonergodic ground motion models. *Bull. Seismol. Soc. Am.* **109**, 1235–1249 (2019). <https://doi.org/10.1785/0120190030>.
- [25] Cornell, C. A. Engineering seismic risk analysis. *Bull. Seismol. Soc. Am.* **58**, 1583–1606 (1968). <https://doi.org/10.1785/BSSA0580051583>.
- [26] McGuire, R. K. Probabilistic seismic hazard analysis and design earthquakes closing the loop. *Bull. Seismol. Soc. Am.* **85**, 1275–1284 (1995). <https://doi.org/10.1785/BSSA0850051275>.
- [27] Azuma, H., Kawai, S. & Fujiwara, H. Development of J-SHIS and applications using API. *J. Disaster Res.* **8**, 869–877 (2013). <https://doi.org/10.20965/jdr.2013.p0869>.
- [28] Fujiwara, H., Morikawa, N. & Okumura, T. Seismic hazard assessment for Japan reconsiderations after the 2011 Tohoku earthquake. *J. Disaster Res.* **8**, 848–860 (2013). <https://doi.org/10.20965/jdr.2013.p0848>.
- [29] Fujiwara, H. et al. Improved seismic hazard assessment after the 2011 Great East Japan earthquake part 2. *Technical Note of the National Research Institute for Earth Science and Disaster Resilience* **490**, 1–388 (2023). <https://doi.org/10.24732/NIED.00003934>.
- [30] Earthquake Research Committee Subcommittee for Strong Ground Motion Evaluation. Probabilistic seismic hazard analysis of response spectra provisional edition. https://www.jishin.go.jp/evaluation/seismic_hazard_map/sh_response_spectrum/ (2022).
- [31] Morikawa, N., Kanno, T., Narita, A., Fujiwara, H. & Fukushima, Y. New additional correction terms for attenuation relations of peak amplitudes and response spectra corresponding to anomalous seismic intensity in northeastern Japan. *J. Jpn. Assoc. Earthq. Eng.* **6**, 23–41 (2006). <https://doi.org/10.5610/jaee.6.23>.

- [32] Morikawa, N. & Fujiwara, H. Ground motion prediction equation based on observation records during the 2011 Great Tohoku earthquake and its application to the Nankai Trough mega-earthquake. In *Proceedings of the 14th Japan Earthquake Engineering Symposium* (2014).
- [33] Morikawa, N. & Fujiwara, H. An additional correction term of ground-motion prediction equation for intra-plate earthquakes. In *Japan Geoscience Union Meeting 2015*, SSS25-14 (2015). https://www2.jpgu.org/meeting/2015/session/PDF/S-SS25/SSS25-14_E.pdf.