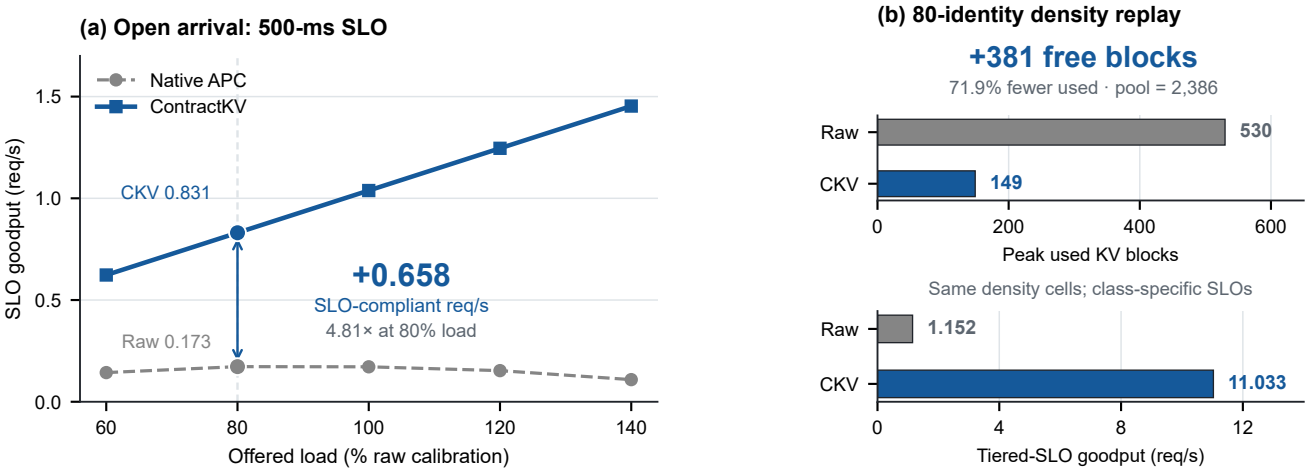
Deployment-template evaluation · open-arrival and density studies shown separately
(a) Open arrival: 500-ms SLO
Native APC
ContractKV
CKV 0.831
+0.658
SLO-compliant req/s
4.81× at 80% load
Raw 0.173
SLO goodput (req/s)
Offered load (% raw calibration)
(b) 80-identity density replay
+381 free blocks
71.9% fewer used · pool = 2,386
Raw
CKV
530
149
Peak used KV blocks
Same density cells; class-specific SLOs
1.152
11.033
Tiered-SLO goodput (req/s)