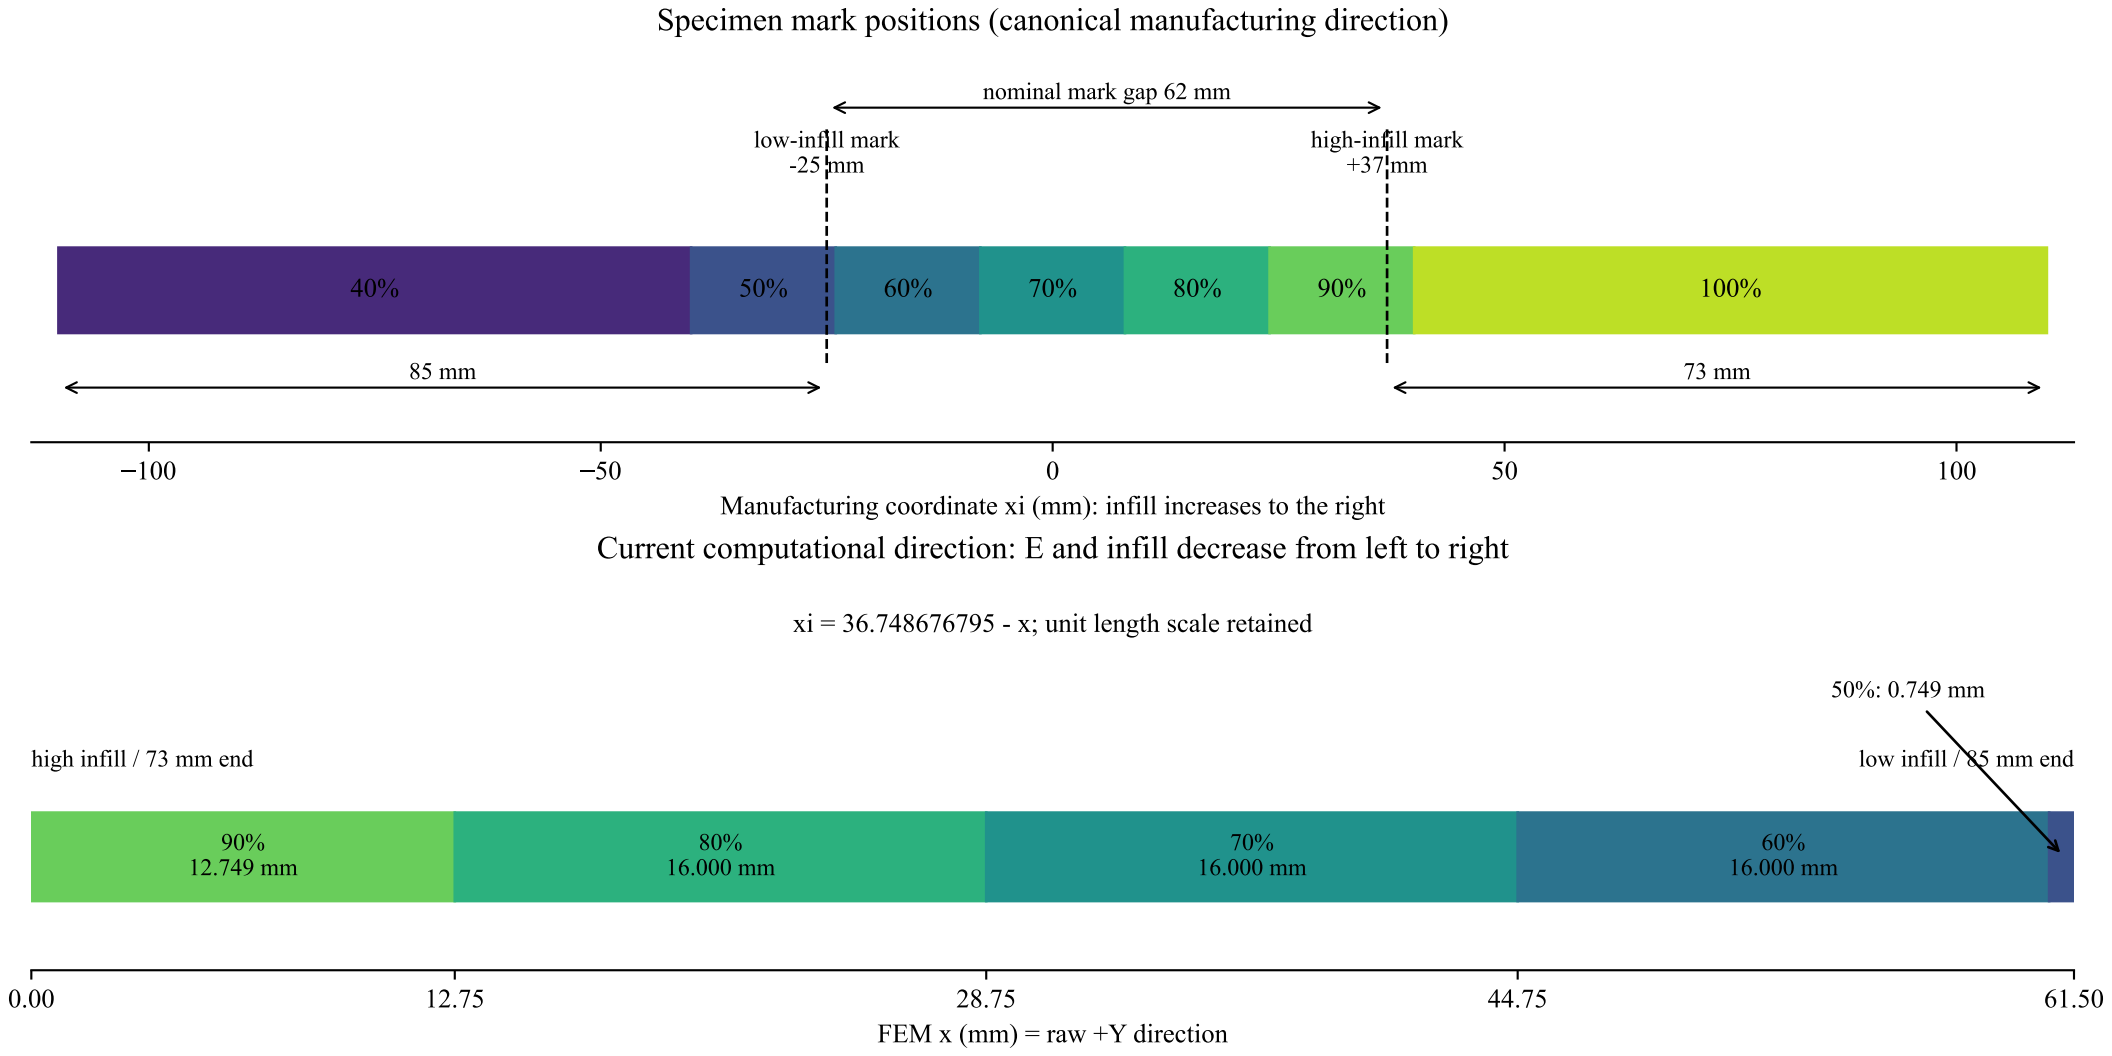
Specimen mark positions (canonical manufacturing direction)
nominal mark gap 62 mm
low-infill mark
-25 mm
high-infill mark
+37 mm
40%
50%
60%
70%
80%
90%
100%
85 mm
73 mm
−100
−50
0
50
100
Manufacturing coordinate xi (mm): infill increases to the right
Current computational direction: E and infill decrease from left to right
xi = 36.748676795 - x; unit length scale retained
50%: 0.749 mm
high infill / 73 mm end
low infill / 85 mm end
90%
12.749 mm
80%
16.000 mm
70%
16.000 mm
60%
16.000 mm
0.00
12.75
28.75
44.75
61.50
FEM x (mm) = raw +Y direction