


Methodology	TS 02795.11	MG Sample No.	S116202
Client	AECOM	MG Project No.	S26240-1
Address	Level 21/420 George St, Sydney NSW 2000	Date Sampled	24/03/2026
Project	Chowder Bay DFI (60740478)	Date Received	8/03/2026
Sample ID	ABH5_0.13-1.5	Date Tested	15/06/2026
Report No.	S116202-T_CBR		

Sampling Method	Sampled by Client - results apply to the sample as received
Preparation Method	Prepared in accordance with the test method

Sample Description Sandy Silty CLAY, trace of gravel

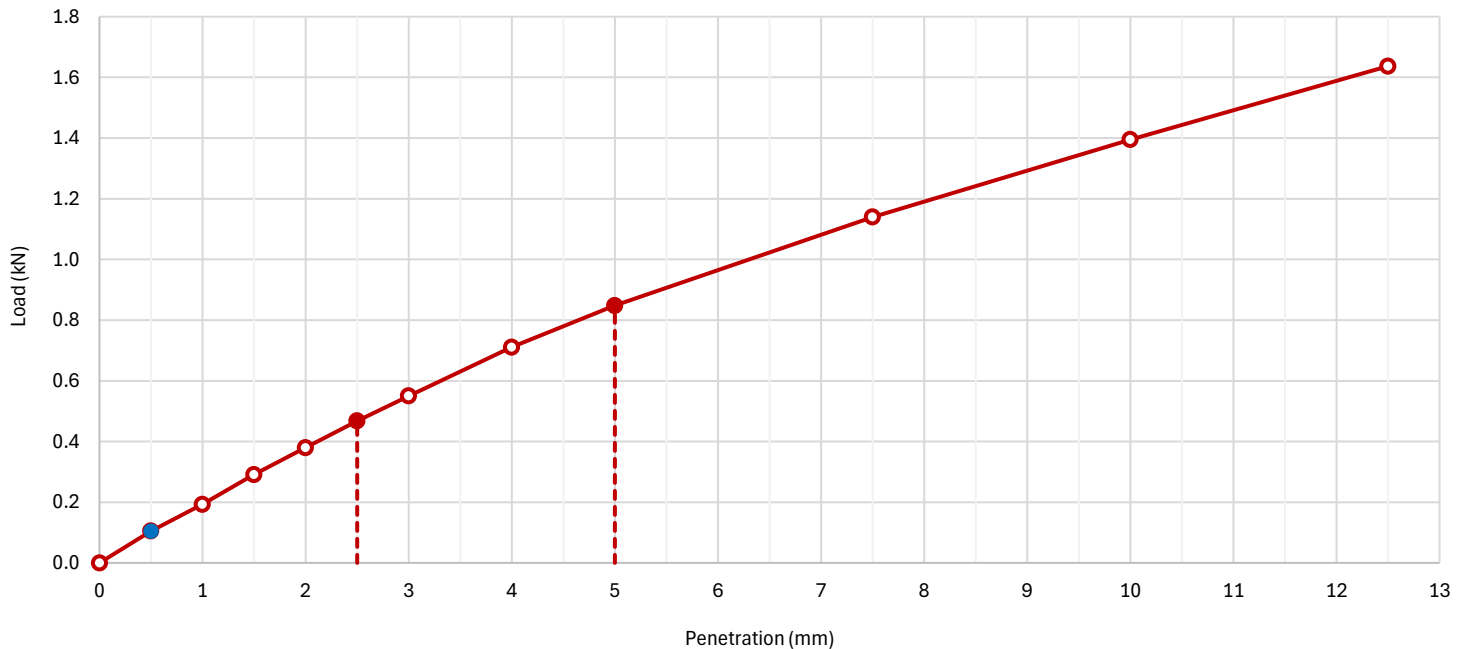

Preparation & Specification		Density & Moisture		Achieved	Target
Material Retained on 19.0 mm Sieve (%)	1	Lab Moisture Ratio - LMR (%)		102	100
Method of Establishing Plasticity Level	Technician Assessment	Lab Density Ratio - LDR (%)		100	100
Sample Curing Time (hrs)	74 hrs	Dry Density - At Compaction (t/m ³)		1.95	1.95
Compaction Hammer Used	Standard	Dry Density - After Soaking (t/m ³)		1.90	
Surcharge Mass Applied (kg)	4.5	Specimen Swell (%)		2.5	
Period of Soaking (days)	10	Moisture Content - At Compaction (%)		10.5	
Maximum Dry Density (t/m ³)	1.95	Moisture Content - Top 30 mm (%)		17.2	
Optimum Moisture Content (%)	10.3	Moisture Content - Full Depth (%)		14.1	
CBR Value (%) at 5.0 mm Penetration	4.5				

Notes



Accredited for compliance with ISO/IEC 17025 - Testing.
NATA Accredited Laboratory Number: 14874
Macquarie Geotechnical Pty Ltd
14 Carter Street, Lidcombe NSW 2141 (Sydney Laboratory)

Authorised Signatory

Raj Mani

Raj Mani

Date of Issue

17/06/2026

Results relate only to the samples tested.
This document shall not be reproduced, except in full.