

Client: Sydney Water Corporation
Project: Willoughby Submain Amplification Project
Location: Francis Street, Naremburn, NSW 2065

Project No: 60764076
Logged by: VT
Start Date: 29/06/26

Checked by: CJ
End Date: 03/06/26
Location Meth.: RTK

Driller: Terratest
Drill Rig: Comacchio GEO 305
Total Depth: 16.1 m

Hole Diameter: 200-96 mm
Inclination: 90°
Bearing: N/A

Easting: 332735.50
Northing: 6257093.20
Hor. Datum: MGA2020-56

RL: 58.05 m
Ver. Datum: AHD
Surface: Pavement (Asphalt)

METHOD	SUPPORT	SAMPLES & FIELD TESTS	GROUND WATER	RL (m AHD)	DEPTH (m)	GRAPHIC LOG	CLASSIFICATION SYMBOL	MATERIAL DESCRIPTION (plasticity/particle characteristics, colour, secondary and other minor components, structure)	MOISTURE CONDITION	CONSISTENCY / RELATIVE DENSITY	ADDITIONAL OBSERVATIONS (Geological Origin)
D T				58.0	0.0			ASPHALTIC CONCRETE: dark grey, 110 mm thick, aggregates up to 15 mm.			PAVEMENT
		PID=0.2 PPM PID=0.1 PPM D: 0.40-0.50 m						FILL - Gravelly SAND: fine - coarse grained, brown; gravel, fine to coarse, angular to sub-angular, igneous.	D		FILL
							CL	FILL - GRAVEL: fine to coarse grained, dark grey, asphalt cobbles, up to 60 mm. Sandy Silty CLAY: low plasticity, pale brown; sand, fine grained.			RESIDUAL SOIL
VE		D: 1.00-1.20 m		57.0	1.0		CH	Silty CLAY: high plasticity, pale grey mottled red-brown; with sand, fine to medium grained; trace gravel, fine to medium, sub-angular, shale; iron staining.			
		SPT: 1.50-1.95 m 5.6.7 N=13 D: 1.50-1.95 m PP=>500, >500, >500 kPa		56.0	2.0			from 2.00 m: trace ironstone gravels, fine to coarse, sub-angular to sub-rounded			
	U	SPT: 3.00-3.45 m 10,15,22 N=37 D: 3.00-3.45 m PP=>500, >500, >500 kPa	02/07/2026 08:25:00	55.0	3.0				w < PL	VSt - H	
ADV		SPT: 4.00-4.45 m 13,10,23 N=33 D: 4.00-4.45 m PP=>500, >500, >500 kPa		54.0	4.0			from 4.00 m: becomes low plasticity			
		SPT: 5.55-5.57 m 15/20 mm HB N=R		53.0	5.0						
				52.0	6.0		CL	Log continued on next page.			
				51.0	7.0						
				50.0	8.0						

Engineering log should be read in conjunction with AECOM soil and rock logging description sheets.

Client: Sydney Water Corporation
Project: Willoughby Submain Amplification Project
Location: Francis Street, Naremburn, NSW 2065

Project No: 60764076
Logged by: VT
Start Date: 29/06/26

Checked by: CJ
End Date: 03/06/26
Location Meth.: RTK
RL: 58.05 m
Ver. Datum: AHD
Surface: Pavement (Asphalt)

Driller: Terratest
Drill Rig: Comacchio GEO 305
Total Depth: 16.1 m
Hole Diameter: 200-96 mm
Inclination: 90°
Bearing: N/A

Easting: 332735.50
Northing: 6257093.20
Hor. Datum: MGA2020-56

METHOD	CORE RUN	GROUND WATER	SAMPLES & FIELD TESTS	RL (m AHD)	DEPTH (m)	GRAPHIC LOG	MATERIAL DESCRIPTION (colour, grain size, texture and fabric, structure, bedding dip, soil moisture, consistency/density)	WEATHERING	TCR (SCR) (RQD) (%)	INFERRED STRENGTH 20 x Is(50) A: $\bullet$ D: $\circ$ UCS: $\square$	DEFECT SPACING (mm)	ADDITIONAL OBSERVATIONS (Defect Descriptions)
				58.0	0.0					SOIL $\frac{200}{4}$ VL $\frac{2}{2}$ L $\frac{6}{6}$ M $\frac{20}{20}$ H $\frac{40}{40}$ VH $\frac{200}{200}$ EH	20 60 200 600 2000	
				57.0	1.0							
				56.0	2.0							
				55.0	3.0							
				54.0	4.0							
				53.0	5.0							

Client: Sydney Water Corporation
Project: Willoughby Submain Amplification Project
Location: Francis Street, Naremburn, NSW 2065

Project No: 60764076
Logged by: VT
Start Date: 29/06/26

Checked by: CJ
End Date: 03/06/26
Location Meth.: RTK
RL: 58.05 m
Ver. Datum: AHD
Surface: Pavement (Asphalt)

Driller: Terratest
Drill Rig: Comacchio GEO 305
Total Depth: 16.1 m
Hole Diameter: 200-96 mm
Inclination: 90°
Bearing: N/A

Easting: 332735.50
Northing: 6257093.20
Hor. Datum: MGA2020-56

METHOD	CORE RUN	GROUND WATER	SAMPLES & FIELD TESTS	RL (m AHD)	DEPTH (m)	GRAPHIC LOG	MATERIAL DESCRIPTION (colour, grain size, texture and fabric, structure, bedding dip, soil moisture, consistency/density)	WEATHERING	TCR (SCR) (RQD) (%)	INFERRED STRENGTH 20 x Is(50) A: • D: o UCS: □ Soil: VL L M H VH EH	DEFECT SPACING (mm)	ADDITIONAL OBSERVATIONS (Defect Descriptions)
HQ3	3		Is(50) A=0.74 MPa	50.0			SANDSTONE: fine to medium grained, pale yellow-brown mottled red-brown, thinly bedded at 0-5°; iron staining.	SW to FR				8.30 m: J, 0°, RF, IR, SN Fe 8.32 m: J, 40°, RF, PR, CN 8.45 m: P, 0°, RF, PR, CN 8.47 m: P, 0°, RF, PR, CT CI 8.55 m: J, 55°, RF, PR, SN Fe
			Is(50) D=0.71 MPa Is(50) A=0.72 MPa	49.0	9.0		SANDSTONE: fine to medium grained, pale grey, thinly bedded to laminated at 0°	SW to FR	100 (100) [95]			9.22 m: P, 0°, RF, PR, CN 9.32 m: P, 0°, RF, PR, CN 9.40 m: P, 5°, RF, PR, CN
			Is(50) A=0.9 MPa Is(50) D=1.42 MPa	48.0	10.0		from 9.75 to 12.00 m: massive	FR				9.69 m: P, 0°, RF, PR, CN
			C: 10.40-10.69 m UCS=24 MPa Is(50) D=1.49 MPa Is(50) A=1.59 MPa	47.0	11.0							
			Is(50) D=1.33 MPa Is(50) A=1.68 MPa C: 12.00-12.50 m UCS=23 MPa	46.0	12.0				100 (100) [100]			11.79 m: P, 0°, RF, PR, CN
4			Is(50) D=1.76 MPa Is(50) A=2.05 MPa	45.0	13.0							12.95 m: HB
			Is(50) D=1.96 MPa Is(50) A=2.51 MPa	44.0	14.0							13.83 m: P, 0°, RF, PR, CN 14.10 m: P, 0°, RF, PR, CN 14.19 m: P, 0°, RF, PR, CN 14.32 m: P, 0°, RF, PR, CN
			Is(50) D=2.84 MPa Is(50) A=2 MPa	43.0	15.0				100 (100) [95]			14.57 m: P, 0°, RF, PR, CN 14.91 m: P, 0°, RF, PR, CN
5			C: 15.52-15.82 m UCS=27 MPa	42.0	16.0							15.24 m: P, 0°, RF, PR, CN 15.26 m: P, 0°, RF, PR, CN 15.49 m: P, 0°, RF, PR, CN 15.52 m: P, 0°, RF, PR, CN

Engineering log should be read in conjunction with AECOM soil and rock logging description sheets.

Client: Sydney Water Corporation

Project: Willoughby Submain Amplification Project

Location: Francis Street, Naremburn, NSW 2065

Driller: Terratest

Drill Rig: Comacchio GEO 305

Total Depth: 16.1 m

Hole Diameter: 200-96 mm

Inclination: 90°

Bearing: N/A

Project No: 60764076

Logged by: VT

Start Date: 29/06/26

Checked by: CJ

End Date: 03/06/26

Location Meth.: RTK

Easting: 332735.50

Northing: 6257093.20

Hor. Datum: MGA2020-56

RL: 58.05 m

Ver. Datum: AHD

Surface: Pavement (Asphalt)

METHOD	CORE RUN	GROUND WATER	SAMPLES & FIELD TESTS	RL (m AHD)	DEPTH (m)	GRAPHIC LOG	MATERIAL DESCRIPTION (colour, grain size, texture and fabric, structure, bedding dip, soil moisture, consistency/density)	WEATHERING	TCR (SCR) (RQD) (%)	INFERRED STRENGTH 20 x IS ₍₅₀₎ A: • D: o UCS: □ SOIL ₀₋₆ VL ₂ L ₆ M ₂₀ H ₆₀ VH ₂₀₀ EH	DEFECT SPACING (mm)	ADDITIONAL OBSERVATIONS (Defect Descriptions)
HQ3			Is(50) A=1.96 MPa Is(50) D=2.91 MPa	42.0			SANDSTONE: fine to medium grained, pale grey, thinly to medium bedded at 0-10° , trace dark grey thin laminations at 0-10°, trace black flecks. Terminated at 16.10 m. Vibrating wire piezometer installed.	FR				
					41.0							
					40.0							
					39.0							
					38.0							
					37.0							
					36.0							
					35.0							
					24.0							

CORE PHOTO REPORT

ID NO. : WSM_BH15

PROJECT : Willoughby Submain Amplification Project


PROJECT NO. : 60764076

LOCATION : Francis Street, Naremburn, 2065

Sheet 1 of 1



Core Tray - 5.57 to 9.00 m

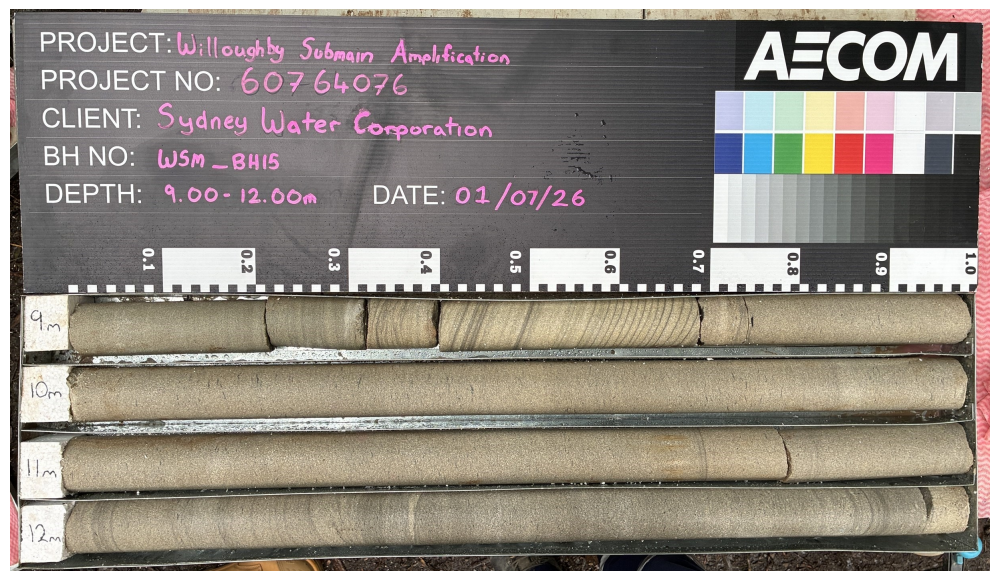

Core Tray - 9.00 to 13.00 m



Core Tray - 13.00 to 16.10 m

AECOM