

Speed · Security · Stability · Simplicity



## ER605 Edge Router

· 5G

· SD-WAN

· Cloud-Managed

· Gigabit Ethernet

# 1. Product Overview

The InHand ER605 is a versatile edge access router that connects stores and offices to the network through 5G/4G cellular or wired broadband to ensure uninterrupted operations and productivity. Equipped with gigabit Ethernet and gigabit Wi-Fi LAN access, the ER605 supports network access for various digital terminals with excellent performance and high availability.

## Features and Advantages:


- **SD-WAN:** Combined with InCloud Manager, quickly builds SD-WAN networking for branch interconnection with flexibility and cost efficiency
- **Flexible Connectivity:** Wired broadband, 4G/5G, and Wi-Fi with link backup and load balancing
- **Centralized Management:** InCloud Manager for zero-touch deployment, remote upgrades, and visualized monitoring
- **Gigabit Access:** 5 × GbE with WAN/LAN switching and dual WAN; Wi-Fi 802.11 ac, up to 1200 Mbps
- **Cost-Effective:** All-in-one solution for retail, office, and branch networking

## Core Technical Specifications

| Technical Item     | Specification                                                                           |
|--------------------|-----------------------------------------------------------------------------------------|
| Cellular           | 5G/4G; 5G DL up to 2 Gbps (Sub-6)                                                       |
| Cloud Management   | InCloud Manager                                                                         |
| SD-WAN / VPN       | SD-WAN (Spoke); IPsec, L2TP, VXLAN, GRE, SSL VPN                                        |
| Network & Security | IPv4/IPv6; VLAN, DHCP, routing (static/OSPF/BGP/RIP); NAT; 3L firewall; PPPoE; dual-SIM |
| Wi-Fi              | 802.11ac dual-band (2.4/5 GHz), 1200 Mbps; multi-SSID, VLAN, guest, portal              |

| Technical Item           | Specification                                                                                       |
|--------------------------|-----------------------------------------------------------------------------------------------------|
| Throughput / Users       | 500 Mbps; IPsec 30–50 Mbps; 50–100 users                                                            |
| SIM                      | Dual Nano SIM                                                                                       |
| Ethernet                 | 5 × GbE (WAN/LAN, dual WAN)                                                                         |
| Antennas                 | 4G: SMA ×2; 5G: SMA ×4; Wi-Fi: RP-SMA ×2; ≤5 dBi                                                    |
| Power                    | 12 V / 2 A; peak ≤24 W                                                                              |
| Dimensions / Environment | 198 × 137 × 25 mm; 848 g; bracket / wall; -10 °C ~ +50 °C op.; -40 °C ~ +85 °C stg.; 5–95% RH; IP30 |
| EMC / Certification      | EMC Level 2; CE, T-Mobile, Verizon, AT&T                                                            |

## 2. Product Dimensions

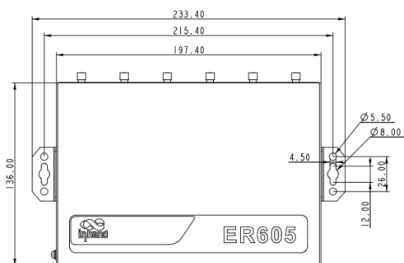

Front View



Side View



Interface

### Note:

1. All dimensions are in millimeters (mm).
2. Dimensions (L × W × H): 198 × 137 × 25 mm.
3. All dimensions are approximate, for reference only.
4. Dimensions shown shall not be used for production.

### 3. Hardware Specifications

| Category/Parameter         | Specification                                                  |
|----------------------------|----------------------------------------------------------------|
| <b>Performance Metrics</b> |                                                                |
| Throughput                 | 500 Mbps                                                       |
| IPsec VPN Throughput       | 30–50 Mbps                                                     |
| Recommended Users          | 50–100                                                         |
| RAM                        | 256 MB                                                         |
| Flash                      | 128 MB                                                         |
| <b>Interfaces</b>          |                                                                |
| Cellular                   | 5G, downlink 2 Gbps, Sub-6 (450 MHz–6 GHz); 4G                 |
| Ethernet                   | 5 × 10/100/1000 Mbps, WAN/LAN switching, dual WAN              |
| SIM Card                   | Dual Nano SIM                                                  |
| Reset                      | Pinhole reset button                                           |
| Antenna                    | 4G: SMA × 2, Wi-Fi: RP-SMA × 2; 5G: SMA × 4, Wi-Fi: RP-SMA × 2 |
| <b>Wi-Fi</b>               |                                                                |
| Standard                   | 802.11 a/b/g/n/ac                                              |
| Max Rate                   | 1200 Mbps                                                      |
| TX Power                   | 2.4 GHz: 18 dBm; 5 GHz: 17 dBm                                 |
| Antenna Gain               | ≤ 5 dBi                                                        |

| Category/Parameter    | Specification                 |
|-----------------------|-------------------------------|
| <b>Power</b>          |                               |
| Input                 | 12 V / 2 A                    |
| Peak Power            | ≤ 24 W                        |
| <b>LEDs</b>           |                               |
| LED                   | Power, Network, Signal, Wi-Fi |
| <b>Mechanical</b>     |                               |
| Dimensions            | 198 × 137 × 25 mm             |
| Weight                | 848 g                         |
| Installation          | Bracket mount, wall mount     |
| Protection            | IP30                          |
| <b>Environment</b>    |                               |
| Operating Temperature | -10 °C ~ +50 °C               |
| Storage Temperature   | -40 °C ~ +85 °C               |
| Humidity              | 5–95 % RH (non-condensing)    |
| <b>EMC</b>            |                               |
| EMC                   | Level 2                       |
| <b>Certification</b>  |                               |
| Certification         | CE, T-Mobile, Verizon, AT&T   |

## 4. Software Specifications

| Category/Parameter      | Specification                                                                                                                                                                                              |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Cloud Management</b> |                                                                                                                                                                                                            |
| Platform                | InCloud Manager                                                                                                                                                                                            |
| Features                | Unified device access, centralized configuration, zero-touch remote deployment, bulk upgrades, remote configuration deployment, SD-WAN networking, connector remote maintenance, two-factor authentication |
| Dashboard               | WAN/access/application visibility, traffic statistics, cellular signal, interface status, client analysis                                                                                                  |
| <b>Network Features</b> |                                                                                                                                                                                                            |
| Access                  | 5G/4G, wired, Wi-Fi                                                                                                                                                                                        |
| Dialing                 | PPPoE, cellular auto redial, dual SIM switching, APN configuration                                                                                                                                         |
| Intelligent Links       | Real-time link detection                                                                                                                                                                                   |
| IP Protocols            | IPv4, IPv6                                                                                                                                                                                                 |
| Protocols               | VLAN, DHCP (Server/Client), DHCP Snooping, DNS, URL Filtering, DDNS, Fixed Address allocation, IP Passthrough, STP, ARP, ICMP, SNMP                                                                        |
| VPN                     | IPSec VPN, L2TP VPN, VXLAN, GRE, SSL VPN                                                                                                                                                                   |
| SD-WAN                  | SD-WAN (Spoke)                                                                                                                                                                                             |
| Routing                 | Static routing, OSPF, BGP, RIP                                                                                                                                                                             |
| <b>Wi-Fi</b>            |                                                                                                                                                                                                            |

| Category/Parameter | Specification                                                        |
|--------------------|----------------------------------------------------------------------|
| Features           | Multi-SSID, SSID VLAN, SSID hidden, guest mode, custom splash portal |
| Encryption         | WPA, WPA2, WPA-PSK, WPA2-PSK                                         |
| <b>Security</b>    |                                                                      |
| Firewall           | 3L inbound/outbound rules, port forwarding, SNAT, DNAT               |
| Access Control     | Black/white list, domain filtering                                   |
| Authentication     | Portal authentication, 802.1X                                        |
| <b>Reliability</b> |                                                                      |
| Traffic Shaping    | QoS based on link, IP, and protocol                                  |
| Upgrades           | Scheduled upgrades                                                   |
| Logs               | Runtime logs, diagnostic logs                                        |
| Events             | User logins, connection disconnects, device reboots                  |
| Alarms             | Local email; platform SMS and email                                  |
| <b>Diagnostic</b>  |                                                                      |
| Tools              | ICMP, packet capture, traceroute                                     |

## 5. Ordering Information

### Model Code

Model code: ER605-\u003cWMNN\u003e-\u003cWLAN/NA\u003e

\u003cWMNN\u003e: Cellular Type & Module

\u003cWLAN/NA\u003e: WLAN = Wi-Fi; NA = no Wi-Fi

## Product Models

| Model                    | Region               | Cellular | Specification                                                                                                                      |
|--------------------------|----------------------|----------|------------------------------------------------------------------------------------------------------------------------------------|
| ER605-NRF2-<br><WLAN/NA> | China                | 5G       | 5G NR<br>n1/n3/n5/n8/n28/n41/n78/n79;<br>LTE-FDD B1/B3/B5/B7*/B8;<br>LTE-TDD B34/B38/B39/B40/B41;<br>WCDMA B1/B5/B8                |
| ER605-NRQ2-<br><WLAN/NA> | China                | 5G       | 5G NR<br>n1/n3/n5/n8/n28/n41/n77/n78/n79;<br>LTE-FDD B1/B3/B5/B8;<br>LTE-TDD B34/B38/B39/B40/B41;<br>WCDMA B1/B5/B8                |
| ER605-NRF4-<br><WLAN/NA> | EU &<br>APAC         | 5G       | 5G NR<br>n1/3/5/7/8/20/28/n38/40/41/66/71/77<br>/78;<br>LTE-FDD B1/3/5/7/8/20/28/66/71;<br>LTE-TDD B38/40/41;<br>WCDMA B1/B3/B5/B8 |
| ER605-LQ20-<br><WLAN/NA> | China                | CAT4     | LTE-FDD B1/B3/B5/B8;<br>LTE-TDD B34/B38/B39/B40/B41;<br>WCDMA B1/B5/B8;<br>GSM/EDGE B3/B8                                          |
| ER605-FF39-<br><WLAN/NA> | North<br>Ameri<br>ca | CAT6     | LTE-FDD<br>B2/B4/B5/B7/B12/B13/B25/B26/B29<br>/B30/B66;<br>WCDMA B2/B4/B5                                                          |
| ER605-FQ58-<br><WLAN/NA> | EU &<br>APAC         | CAT4     | LTE-FDD B1/B3/B5/B7/B8/B20/B28;<br>LTE-TDD B38/B40/B41;<br>WCDMA B1/B5/B8;<br>GSM/EDGE B3/B8                                       |



|                          |              |              |                                                                                             |
|--------------------------|--------------|--------------|---------------------------------------------------------------------------------------------|
| ER605-FQ59-<br><WLAN/NA> | EU &<br>APAC | CAT6         | LTE-FDD<br>B1/B3/B5/B7/B8/B20/B28/B32;<br>LTE-TDD B38/B40/B41/B42/B43;<br>WCDMA B1/B3/B5/B8 |
| ER605-EN00-<br><WLAN/NA> | —            | No<br>Module | No cellular module                                                                          |

## 6. Contact Us

- Website: [InHand Networks](https://www.inhandnetworks.com)
- Copyright: © InHand Networks. All rights reserved.