

Share happiness with your friends



FV680 AI Vending Machine

· 24/7 Operation

· AI Recognition

· Grab & Go

· Remote Management

1. Product Overview

FV680 AI vending machine for Grab & Go smart retail with cloud remote management.


Key features:

- **24/7 Operation:** Fully automated; cuts labor cost
- **AI Recognition:** Proprietary algo; boosts conversion
- **Grab & Go:** Card swipe open; auto-checkout on close
- **Remote Management:** Cloud monitor, price, promotions
- **HealthLock:** Auto door-lock; keeps items fresh

Core Technical Specifications

Specification Item	Value
AI Recognition	Proprietary algorithm; boosts sales conversion
Privacy	Face blurring for compliance and privacy
Grab & Go	Card swipe to open; auto-checkout on door close
Remote Management	Cloud monitoring, pricing, and promotions
Cellular Connectivity	LTE module (FQ09 variant, model dependent)
Analytics	Sales trends, customer behavior
Dimensions	775 × 788 × 1982 mm
Capacity	680 L (24 cu.ft); 6 open shelves
Power Supply	115 V AC, 60 Hz, 10 A; NEMA 5-15P
Compressor	1/3 HP
Door Glass	Double-pane low-e tempered
Ship Weight	164 kg (362 lbs)

2. Product Dimensions

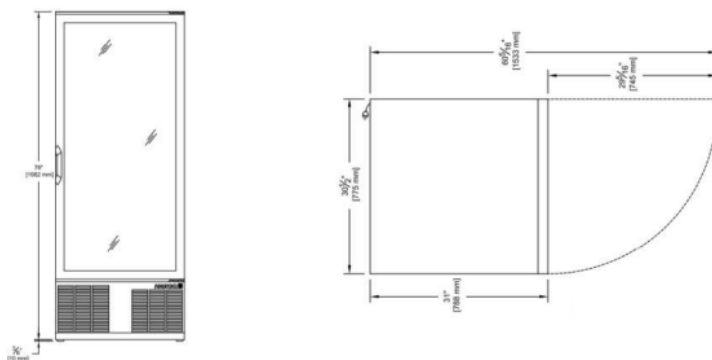

Front Elevation and Plan View (door swing)

Note:

1. All dimensions are in millimeters (mm); imperial units shown on drawing for reference.
2. Body dimensions (W × D × H): 775 × 788 × 1982 mm.
3. Door width: 745 mm; depth with door open 90°: 1533 mm.
4. Base clearance: 10 mm (3/8").
5. All dimensions are approximate, for reference only.
6. Dimensions shown shall not be used for production.
7. Dimensions are subject to part and manufacturing tolerances.
8. Specifications may change without prior notice.

3. Hardware Specifications

Category/Parameter	Specification
Cabinet & Insulation	
Insulation	Foamed-in-place polyurethane
Door Glass	Double-pane low-e tempered glass, argon filled
Shelving	6 shelves; open shelves with flexible placement
Capacity	680 L (24 cu.ft); ~2× traditional machine volume
Refrigeration	
Compressor	1/3 HP
Ventilation	Directed airflow ventilation
Smart Interface	
POS	Integrated POS with screen (Grab & Go)

Category/Parameter	Specification
Door Access	Swipe card to open door; auto-checkout upon door closing
Payment Method	POS (per model configuration)
Connectivity	
Cellular	LTE module (FQ09 variant, model dependent)
Electrical	
Voltage	115 V AC, 60 Hz
Current	10 A
NEMA Configuration	5-15P
Mechanical	
Dimensions (W × D × H)	775 × 788 × 1982 mm
Door Width	745 mm
Depth (door open 90°)	1533 mm
Ship Weight	164 kg (362 lbs)
Ship Cube	1.39 m ³ (49 cu.ft)
Base Clearance	10 mm

4. Software Specifications

Category/Parameter	Specification
AI Vending Machine Management System	
AI Recognition	Proprietary recognition algorithm to boost sales conversion
Privacy	Face blurring for compliance and privacy protection
Checkout	Grab & Go: swipe card to open; auto-checkout on door close
Operations & Monitoring	
Remote Management	Real-time cloud monitoring and control

Category/Parameter	Specification
Remote Configuration	Adjust settings, pricing, and promotions remotely
Machine Monitoring	Real-time monitoring for continuous operation
Workflow	Intuitive interface; simplified operational workflow
Analytics	
Reporting	Sales trends and customer behavior reports
Decision Support	Data-driven decisions for smarter retail operations

5. Ordering Information

Model Rule

Model code: FV680-PS02-<WMNN>

<WMNN>: Cellular Type & Module (remote connectivity)

Configurable options per ordering guide:

- <BBB>: Capacity
- <XXX>: Payment Method
- <C><E>: Other options

Model List

Model	Region	<WMNN>: Cellular Type & Module	Capacity	Payment Method	Other
FV680 -PS02- FQ09	Global	FQ09	680 L (24 cu.ft)	POS	—

6. Contact Us

- Website: [InHand Networks](https://www.inhandnetworks.com)
- Copyright: © InHand Networks. All rights reserved.