

Compact Industrial LTE Router



InRouter315 Industrial Cellular Router

· 5G/4G

· Wi-Fi

· Security

· Cloud-Managed

1. Product Overview

InRouter315 is a compact industrial cellular router that combines 5G/4G, Wi-Fi, and VPN capabilities for secure, resilient, and scalable IoT networking.

Positioning: Industrial multi-access router for secure data links and cloud-managed distributed deployments.


Key features:

- **Multi-network access:** Cellular, wired, and Wi-Fi access options for complex field scenarios
- **Always-on reliability:** Multi-link backup, dual SIM switching, VRRP, and layered link detection
- **Industrial interfaces:** 5×FE, optional serial/IO, optional GNSS, dual Nano-SIM
- **Enterprise-grade security:** Firewall, ACL, VPN suite, 802.1X, and certificate support
- **Cloud O&M at scale:** Device Manager for remote monitoring, batch management, and diagnostics


Core Technical Specifications

Technical Item	Specification
Cellular Network	5G NR (by SKU), LTE Cat6/Cat4/Cat1, dual SIM failover
VPN	PPTP, L2TP, GRE, IPSec, OpenVPN, DMVPN, WireGuard, ZeroTier
Wi-Fi	IEEE 802.11b/g/n, 2.4 GHz, up to 300 Mbps, AP/Client mode
Security	SPI firewall, DoS defense, ACL, URL filtering, 802.1X, CA certificates
Reliability	VRRP, heartbeat link detection, embedded watchdog
Cloud Management	Device Manager, SNMP v1/v2c/v3 + TRAP
Dimensions (W x D x H)	127 x 108.2 x 35 mm
Weight	454 g
Ethernet Ports	5 x 10/100Mbps FE RJ45 (WAN/LAN/VLAN), 1.5kV isolation
Serial/IO Interfaces	1 x RS232 + 1 x RS485 or 4 x IO (model-dependent)
Power Input	9-36V DC, industrial terminal, over-current and anti-reverse protection
Operating Temperature	Normal: -35°C to +70°C Extended: -40°C to +75°C


2. Product Dimensions

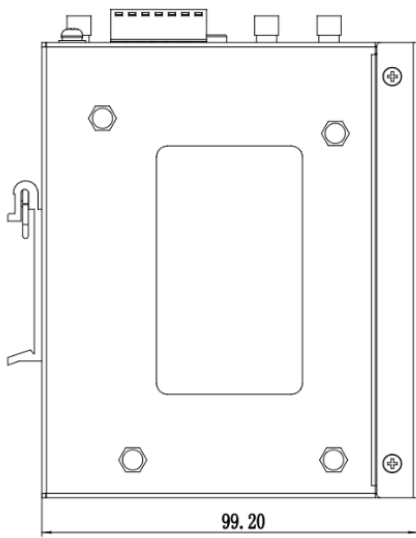

Front View

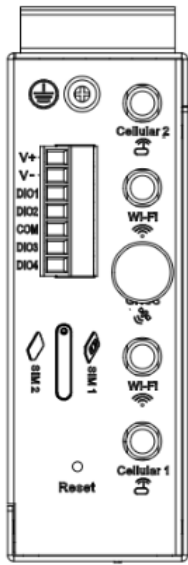

Side View

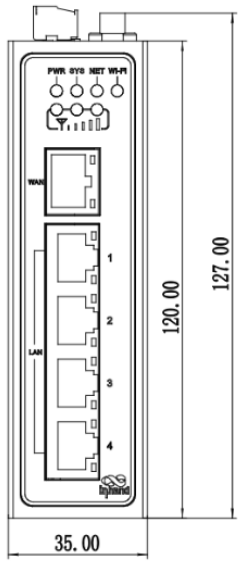

Interface Diagram

Note:

1. All dimensions are in millimeters (mm).
2. All dimensions are approximate and for reference only.
3. Dimensioned drawings are not intended for machining.
4. Dimensions are subject to part and manufacturing tolerances.
5. Specifications may change without prior notice.

3. Hardware Specifications

Category/Parameter	Specification
CPU and Storage	
CPU	580MHz
RAM	128MB
Flash	64MB SPI flash
Connectivity and Interfaces	
Ethernet Ports	5 x 10/100Mbps FE RJ45 (WAN/LAN/VLAN), 1.5kV isolation
Power Interface	DC 9~36V, 2-pin industrial terminal, over-current and anti-reverse protection
I/O Port	Optional 4 x IO (model-dependent)



Category/Parameter	Specification
Serial Port	Optional 1 x RS232 + 1 x RS485 (model-dependent)
Reset Button	Supported
SIM Slot	1 x drawer dual-Nano SIM slot
Antenna Connectors	2 x SMA (LTE), 2 x RP-SMA (Wi-Fi), 1 x SMA (GNSS, optional)
Wi-Fi	
Radio Frequency	2.4GHz
Max Transmission Bandwidth	Up to 300Mbps
Transfer Protocol	IEEE 802.11b/g/n
Transmission Distance	Up to 80m line-of-sight (Actual transmission distance depends on environment of the site.)
Power Rate	
Standby Power	120mA-200mA@12V
Working Power	150mA-320mA@12V
Peak Power	320mA@12V
Mechanical Specifications	
Product Dimensions	127 x 108.2 x 35 mm
Product Weight	454g
Mounting Method	DIN-rail and wall mounting
Protection Rating	IP30
Housing and Cooling	Fanless metal housing
Environment and Compliance	
Storage Temperature	-40~85°C
Operating Temperature	Normal: -35°C to +70°C Extended:-40°C to +75°C
Ambient Humidity	5~95% RH, non-condensing

Category/Parameter	Specification
Physical Characteristics	IEC60068-2-27 shock resistance; IEC60068-2-6 vibration resistance; IEC60068-2-32 drop resistance
EMC Standard	EN61000-4-2, level 3, Static EN61000-4-3, level 3, Radiation Electric Field EN61000-4-4, level 3, Pulsed Electric Field EN61000-4-5, level 3, Surge EN61000-4-6, level 3, Conducted Disturbance Immunity EN61000-4-8, Power Frequency Field Resistance, horizontal / vertical 400A/m (>level 2) EN61000-4-12, level 3, Shock Wave Resistance
Certifications	CE/E-MARK/IMDA/RCM/FCC/IC/PTCRB/Verizon/AT&T/T-Mobile/MIC&JATE/UL/C1D2/IEC62443-4-2/EN18031

4. Software Specifications

Category/Parameter	Specification
Network Features	
Network Access	APN, VPDN
Access Authentication	CHAP/PAP
Network Type	GSM/GPRS/EDGE, UMTS/HSPA+/EVDO/TD-SCDMA, TDD/FDD LTE, 5G SA (by SKU)
LAN protocol	Ethernet
WAN protocol	PPP, static IP, DHCP, PPPoE
IP Applications	IPv4, Ping, Trace, DHCP server/relay/client, DNS relay, DDNS, Telnet, IP passthrough
IP Routing	Static routing and OSPF dynamic routing
NAT Functions	NAT
Security	
Security	SPI firewall, DoS defense, ACL, URL filter, port/virtual IP mapping, IP-MAC binding, 802.1X



Category/Parameter	Specification
Data Security	PPTP/L2TP/GRE/IPSec/OpenVPN client/server/DMVPN/WireGuard/ZeroTier
CA Certificates	Supported
Reliability	
Link Detection	Heartbeat detection with auto-redial
Embedded Watchdog	Supported
Hot Backup Mechanism	VRRP hot backup
Dual-SIM Switching	Dual SIM failover
WLAN	
Operating Mode	AP/Client mode
Security Features	WPA/WPA2, WEP/TKIP/AES
Intelligence	
DTU Function	TCP/UDP transparent mode, TCP server mode, DCUDP/DCTCP, DTU status monitoring
Bridge	Modbus RTU-to-TCP bridge
Network Management	
QoS Management	Bandwidth limit, IP speed limit
Configuration Methods	Telnet/Web/SSH/Console
Upgrade Methods	Web/Device Manager updates
Log	Local system log, remote log, and serial export of log.Power down saving of important logs.
SMS Function	Status query, restart
Dial-on-demand	Dial-on-demand, data / SMS activation
Network Management Function	Device Manager, batch management

Category/Parameter	Specification
SNMP Function	SNMP v1/v2c/v3 + TRAP
Traffic Management	Traffic threshold, Traffic statistics management
Alarm	System restart alarm, LAN port online/offline alarm, data traffic alarm, SIM card failure alarm ,etc.
Maintenance Tools	Ping, route tracking, network speed test
Status Query	System status, modem status, network connection status, and routing status

5. Ordering Information

Model Rule

Model code: IR315-<WMNN>-<WLAN/NA>-<S/NA>-<G/NA>

<WMNN>: Cellular Type & Module

<WLAN/NA>: Wi-Fi option

<S/NA>: Optional interface (S =1×RS232+1×RS485, NA =4×IO)

<G/NA>: GNSS option

Model List

Model Pattern	Region	<WMNN>: Cellular Type & Module	<WLAN/NA>	<S/NA>	<G/NA>
IR315-FQ58- <WLAN/NA>- <S/NA>	Europe/APAC/Australia/NZ (CAT4)	FDD B1/B3/B5/B7/B8/B20/B28; TDD B38/B40/B41; WCDMA B1/B5/B8; GSM B3/B8	WLAN or NA	S or NA	NA
IR315-FQ58- WLAN- <S/NA>-G	Europe & APAC (CAT4)	FDD B1/B3/B7/B8/B20/B28A; TDD B38/B40/B41; WCDMA B1/B8; GSM B3/B8	WLAN	S or NA	G



Model Pattern	Region	<WMNN>: Cellular Type & Module	<WLAN/NA>	<S/NA>	<G/NA>
IR315-FQ68- <WLAN/NA>-S	Latin America (CAT4)	FDD B1/B2/B3/B4/B5/B7/B8/B28/B66; TDD B40; WCDMA B1/B2/B4/B5/B8; GSM B2/B3/B5/B8	WLAN or NA	S	NA
IR315-FQ78- <WLAN/NA>- <S/NA>	Australia & Latin America (CAT4)	FDD B1/B2/B3/B4/B5/B7/B8/B28; TDD B40; WCDMA B1/B2/B5/B8; GSM B2/B3/B5/B8	WLAN or NA	S or NA	NA
IR315-FQ78- WLAN-G	Australia & Latin America (CAT4)	FDD B1/B2/B3/B4/B5/B7/B8/B28; TDD B40; WCDMA B1/B2/B5/B8; GSM B2/B3/B5/B8	WLAN	NA	G
IR315-FF39- <WLAN/NA>- <S/NA>	North America (CAT6)	LTE FDD B2/B4/B5/B7/B12/B13/B14/B17/B25 /B26/B29/B30/B66/B71; LTE TDD B41/B42/B43/B46/B48; WCDMA B2/B4/B5	WLAN or NA	S or NA	NA
IR315-FF39- WLAN-S-G	North America (CAT6)	LTE FDD B2/B4/B5/B7/B12/B13/B14/B17/B25 /B26/B29/B30/B66/B71; LTE TDD B41/B42/B43/B46/B48; WCDMA B2/B4/B5	WLAN	S	G
IR315-FQ38- <WLAN/NA>- <S/NA>	North America (CAT4)	LTE FDD B2/B4/B5/B12/B13/B17/B66/B71; WCDMA B2/B4/B5	WLAN or NA	S or NA	NA
IR315-FQ88- <WLAN/NA>-S	Japan (CAT4)	LTE FDD B1/B3/B8/B18/B19/B26; LTE TDD B41; WCDMA B1/B6/B8/B19	WLAN or NA	S	NA
IR315-EN00- <WLAN/NA>-S	Global (No Cellular)	No cellular module	WLAN or NA	S	NA



Model Pattern	Region	<WMNN>: Cellular Type & Module	<WLAN/NA>	<S/NA>	<G/NA>
IR315-LQ20- <WLAN/NA>-S	China (CAT4)	FDD B1/B3/B5/B8; TDD B34/B38/B39/B40/B41; WCDMA B1/B5/B8; GSM B3/B8	WLAN or NA	S	NA

6. Contact Us

- Website: [InHand Networks](#)
- Copyright: © InHand Networks. All rights reserved.