


Installation Guide (Part 1)


Size: 150*120*60



Place the top plate, bottom plate, left side plate and right side plate as shown in the figure. Please pay attention to the position of the labels, and the arrow on the labels should point as shown in the figure.

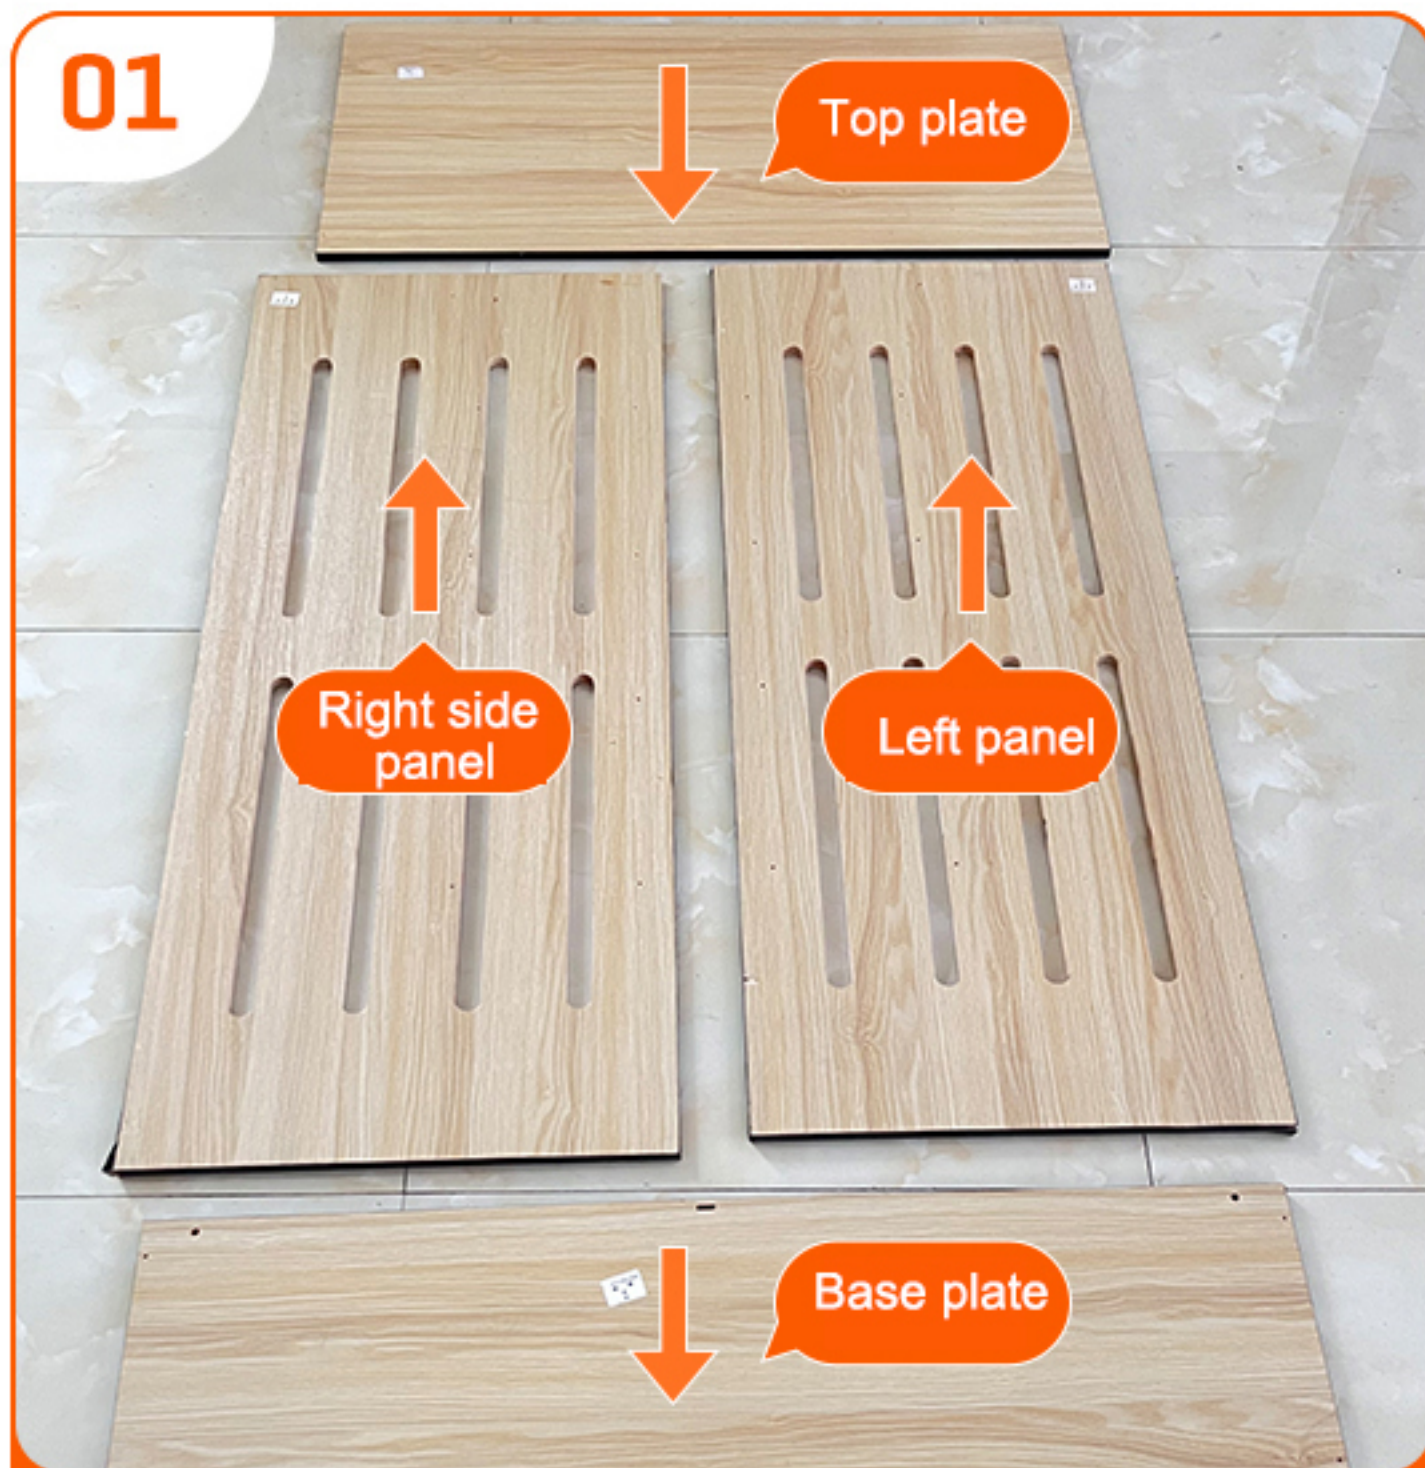

Turn the base plate as shown in the picture over. The label is on the bottom and the arrow points upwards.

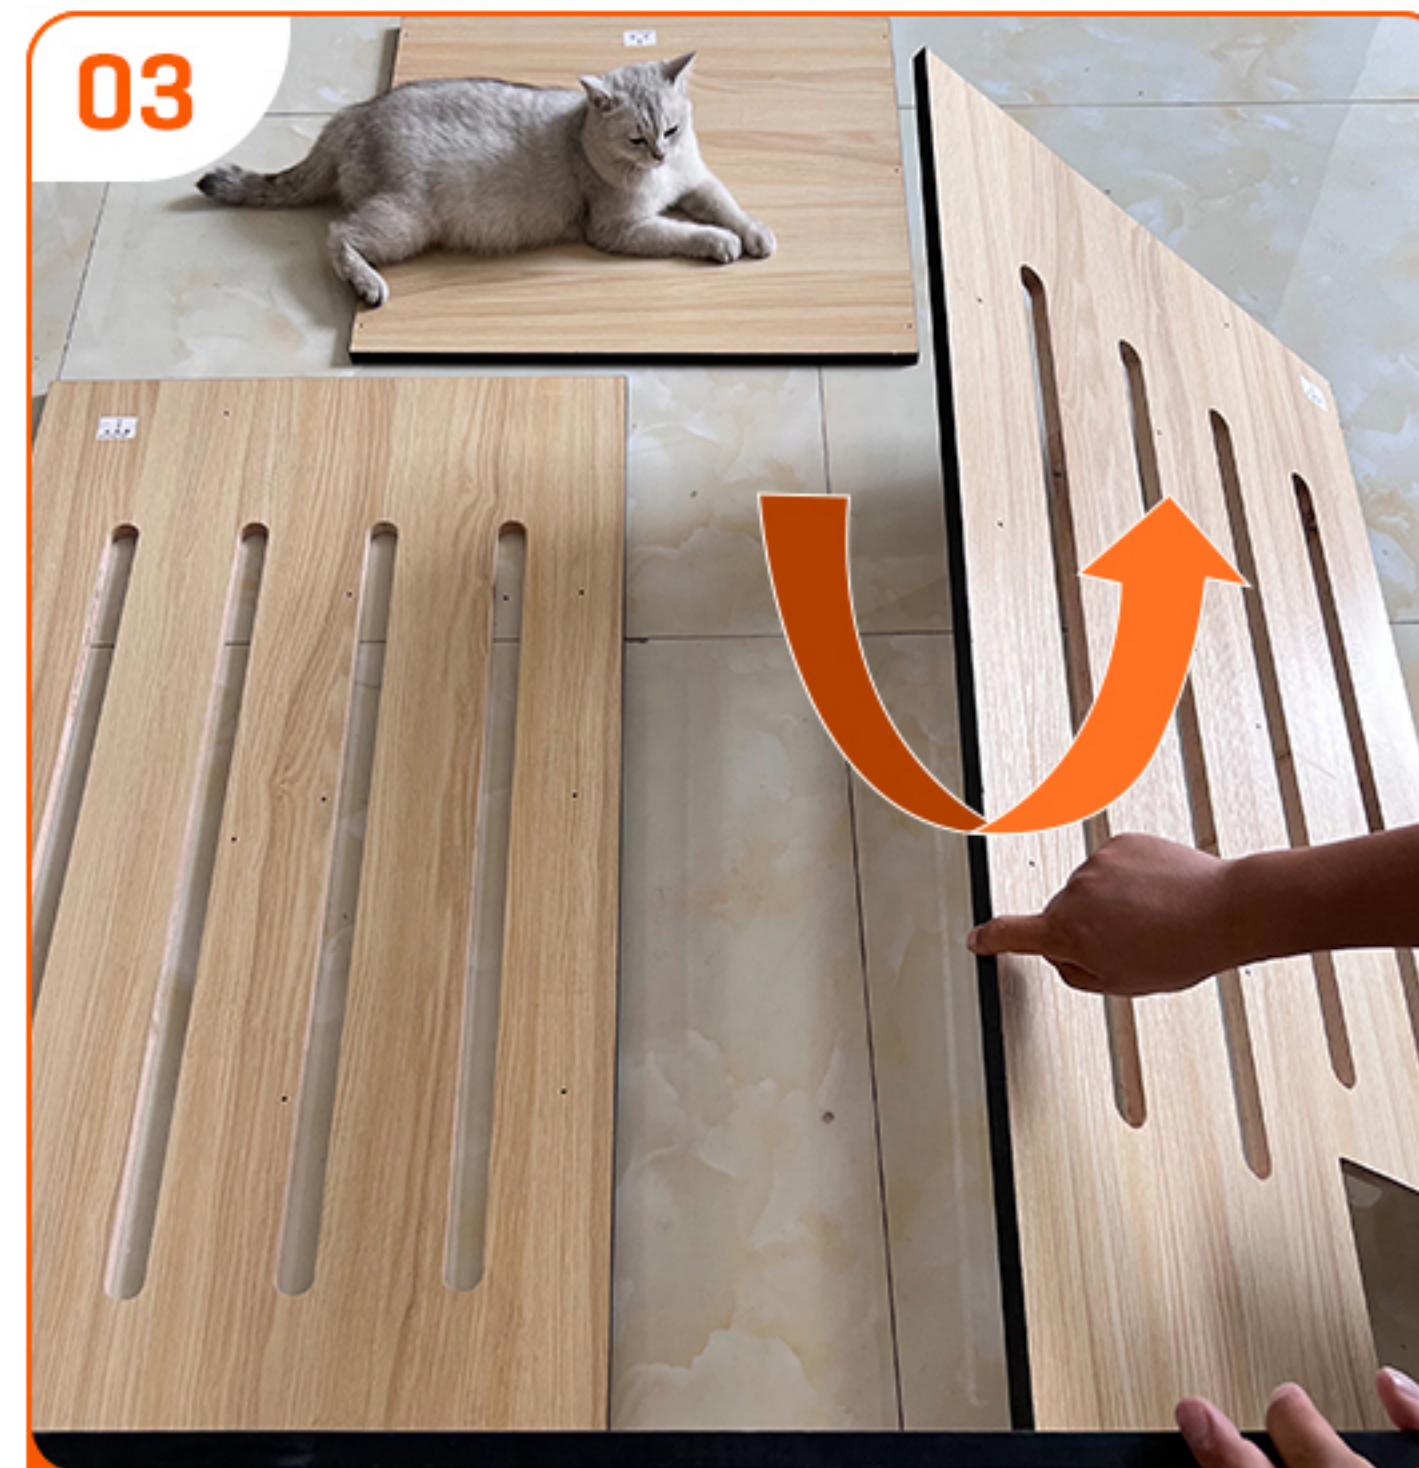

Turn the left panel as shown in the picture upside down. The label is on the bottom and the arrow points upwards.



Use 4CM long yellow screws and tighten the screws from the bottom plate to the side plate.



Turn the right panel as shown in the picture upside down. The label is on the bottom and the arrow points upwards. Use a 4CM yellow long nail to tighten the screws from the base plate to the side plate.



Turn the top plate as shown in the picture. The label is on the bottom and the arrow points upwards. Use a 4CM yellow long nail to tighten the screws from the top plate to the side plate.



After the frame is assembled, the labels of the top plate and the side plates are located at the lower part on the outside. The hinge holes and the lock holes are located at the lower part on the inside.



Standing at the base position, the back panel is divided into left and right parts and is fixed to the frame. The back panel is fastened with medium-sized screws. Since there are no pre-drilled holes on the side panel, pre-drilling might cause the installation to be unstable. Instead, use screws directly.



The wheels are fitted with the smallest screws and there are no pre-drilled holes on the base plate. Pre-drilling holes might cause the installation to be unstable. Simply use screws to attach them to the four corners of the base plate.



Take out two cat heads and two square cover plates. One cover plate is fixed at the lower end of the cat head, and the other is fixed at the upper end of the cat head. These form two different cat nests.




First, connect the middle small jump platform and the support, then fix it on the cat head board.



Fix the brackets at both ends of the cat scratching post with 4CM yellow nails. After that, it will look like the picture below.



Use 4CM nails to fix the upper and lower boards. The upper board is circular on the right side. The lower board has an arrow pointing towards the backboard, and there are two vertical nail holes on the right side (for installing the stairs). The upper and lower boards are fixed to the reserved holes on the side board and the backboard using 4CM long nails.

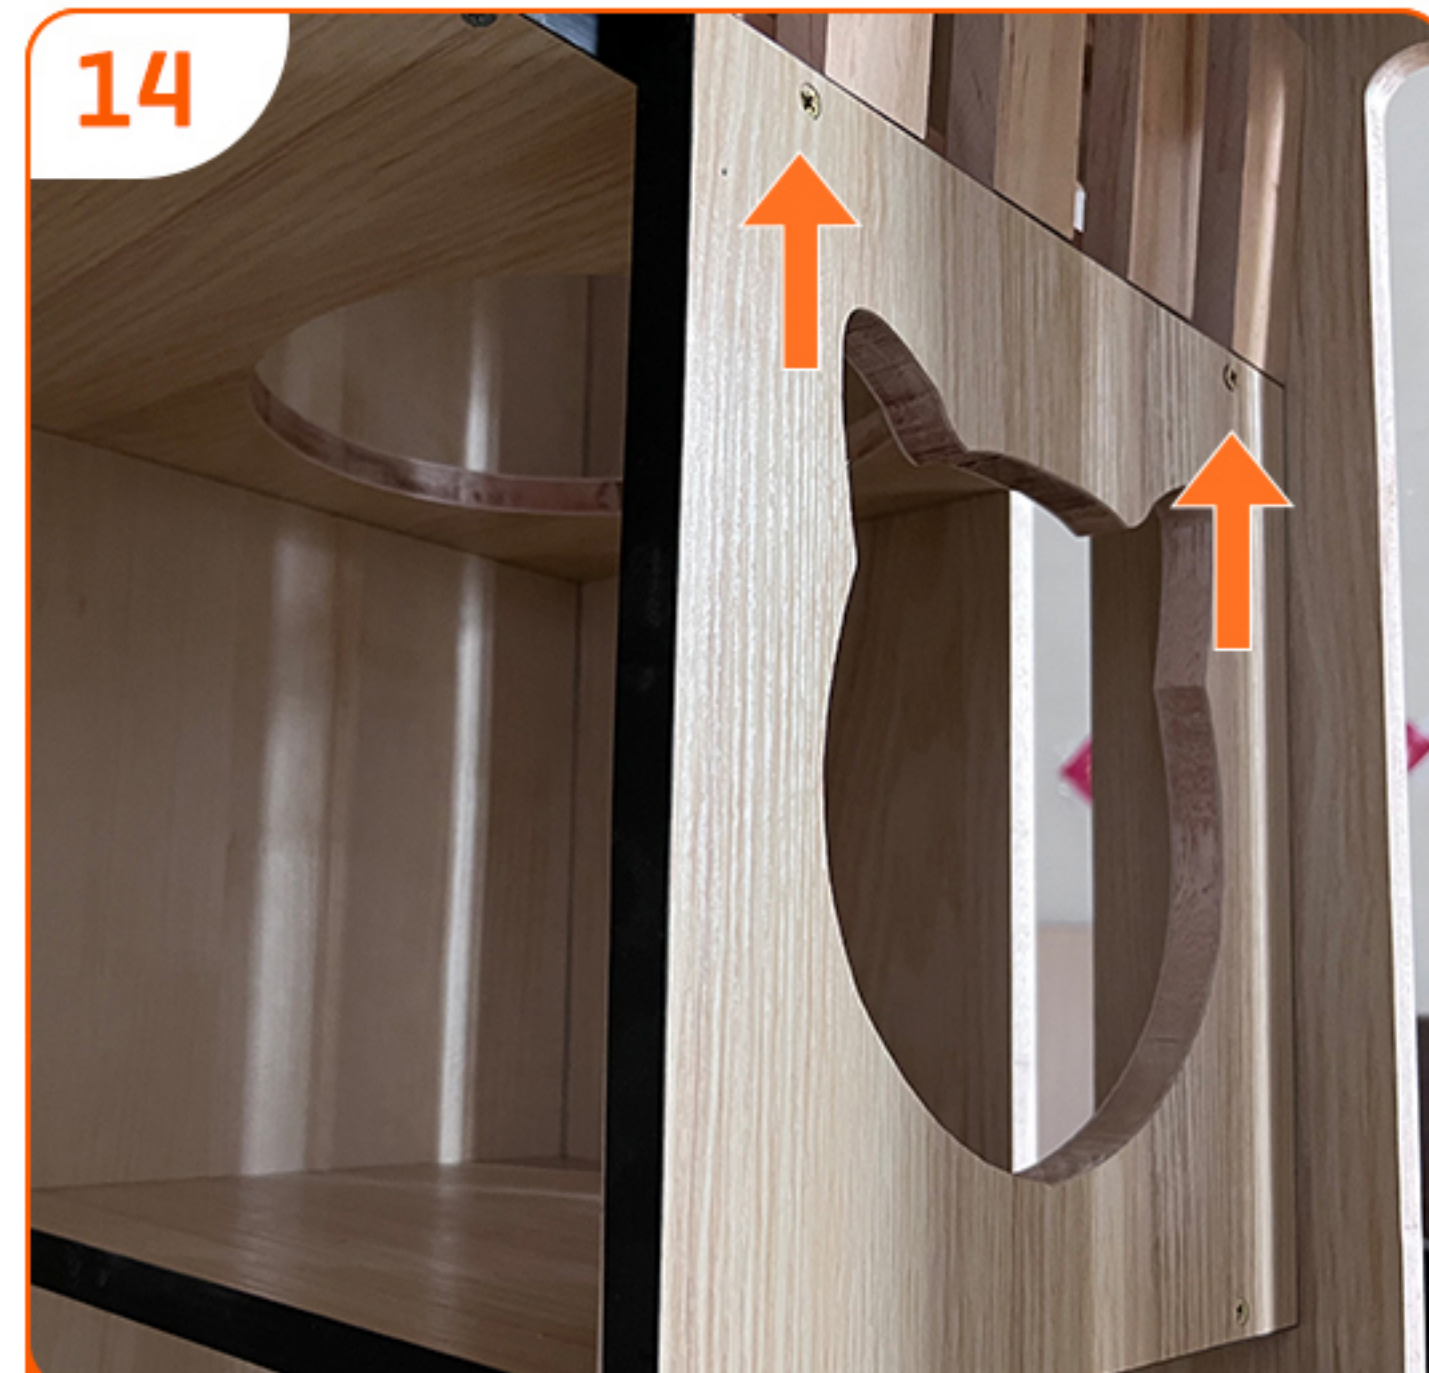

Using 4CM nails, fix the cover plate at the lower end of the cat bed on the upper board below the round hole. Fix the reserved holes on the top board, side boards and back board.



Using 4CM nails, fix the cover plate at the upper end of the cat's bed onto the left upper position of the lower board. Secure the reserved holes on the side board and the back board.



Use the smallest nails to drive four nails from the outside of the back panel to fix the cat head of the small diving platform.

Installation Guide (Part 2)

Size: 150*120*60

17



Fix the cat scratching post with 2.5CM nails at any position on the side panel. Installation can be done according to personal preference.

18



Fix the fence to the side of the board using 4CM nails. Use 4CM screws to pass through the board and fix the bottom from the top of the ladder. The bottom can be fixed with 2.5CM custom screws, or it can be left unfixed.

19




For safety reasons, it is best to wear gloves during installation. First, use the smallest screws to install the hinges in the round holes on the door frame.

20



When installing the door, you can use cardboard to pad underneath, leaving some space for movement below.

21

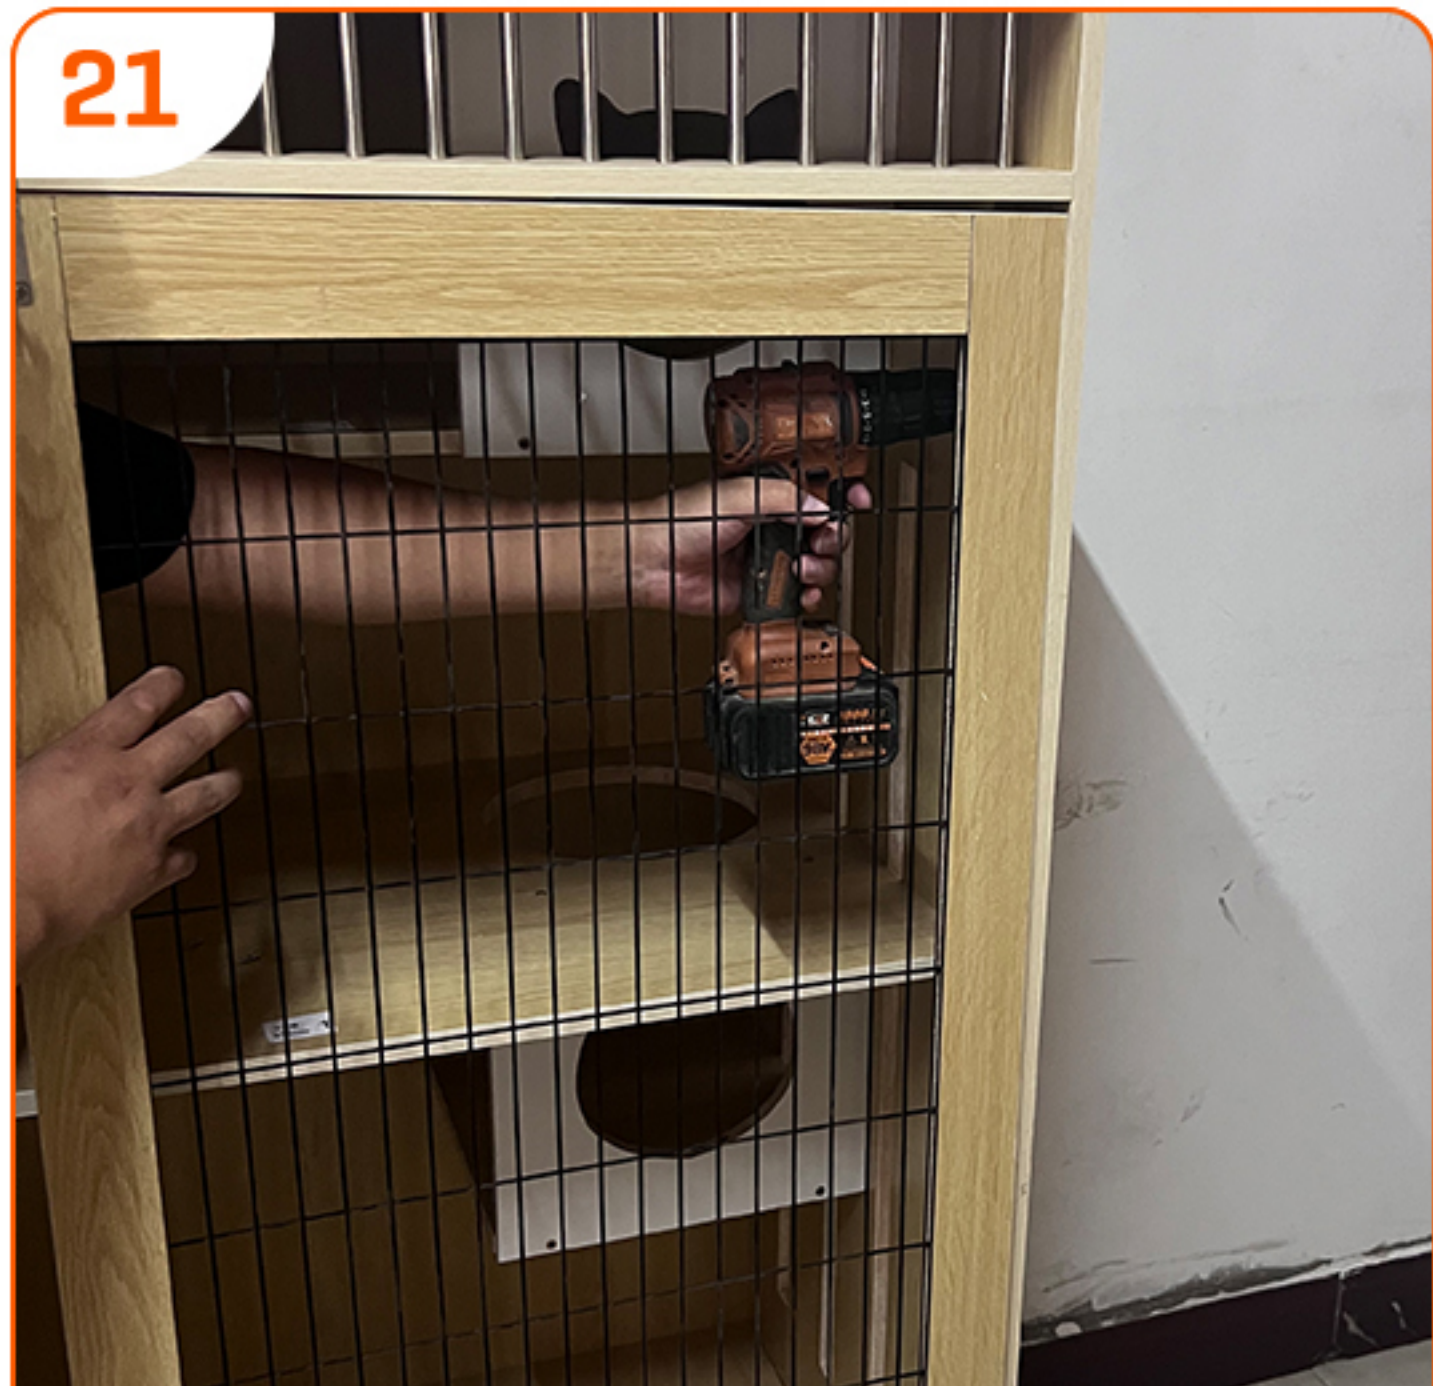


The iron net door is in a closed position. Ensure that the iron net door is level with the door opening. Use the smallest screws to fix the door to the side panel.

22



After the two doors are installed, if there is any warping of the doors, you can adjust the screws in the middle of the hinges and observe the condition of the doors while doing so.

23

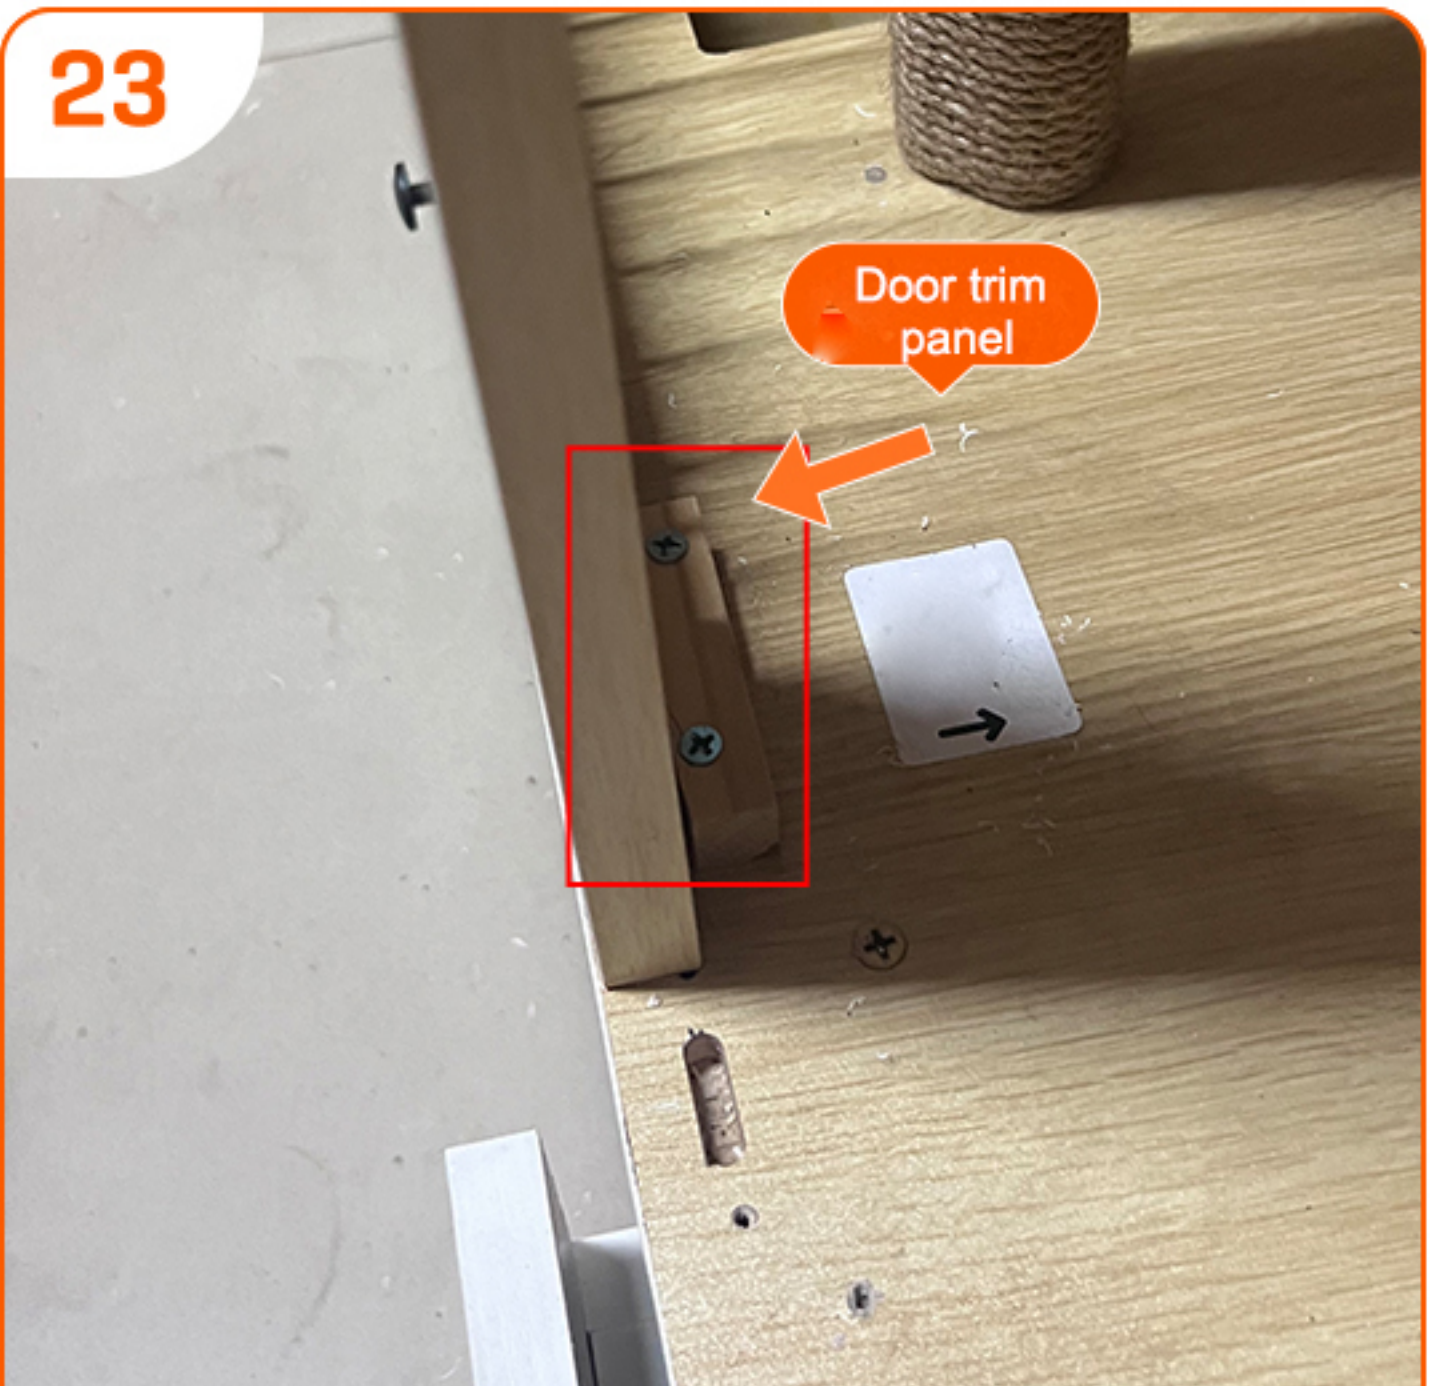

Door trim panel

After adjusting the position of the door, install the lower door stop first.

24



Then install the upper door stopper. The door stopper can be placed in the middle of the two doors to prevent the door from being pushed in.

25



After closing the door, install the bolt with the smallest screws.

26



Remove the adhesive tape on the back of the handle and stick it onto the cabinet door.

27



The cabinet has been installed successfully.

