

Parking Assistance for Trailer-Truck Transport Vehicles Using Sensor Fusion and Motion Planning

George Alenchery, Tova Quinones, Thomas Jeske, Tristan Lindo-Slones,
Amber Jones, Jordan Fletcher, Lentz Fortune

*Software Engineering Department
Florida Gulf Coast University*

{gaalenchery6113, tdquinones135, trjeske5899, talindoslones4387,
anjones4463, jbfletcher0803, lgfortune9567}@eagle.fgcu.edu

Sudip Dhakal

*Software Engineering Department
Florida Gulf Coast University
sdhakal@fgcu.edu*

Abstract—Autonomous driving technology has rapidly evolved over the past decade, offering significant improvements in transportation efficiency, safety, and cost reduction. While much of the progress has focused on highway driving and obstacle avoidance, low-speed maneuvers such as parking remain among the most difficult challenges for autonomous systems. This challenge is especially pronounced in trailer-truck transport vehicles due to their articulated motion and environmental constraints. This paper presents a proposed framework for autonomous truck parking that integrates perception, motion planning, control systems, and infrastructure awareness. By combining sensor fusion, Hybrid A* path planning, nonlinear model predictive control (NMPC), and data-driven parking systems, this work highlights the importance of system-level coordination for reliable and scalable autonomous parking solutions. As a proof-of-concept implementation, we adapted an open-source A* path planning simulation to incorporate a tractor-trailer kinematic model, demonstrating articulated vehicle path planning within a command-line simulation environment, with jackknife prevention identified as an area requiring further development.

Index Terms—Autonomous driving, truck parking, Hybrid A*, sensor fusion, motion planning, articulated vehicles, model predictive control, tractor-trailer kinematics

I. INTRODUCTION

Autonomous driving technology has rapidly evolved over the past decade, offering significant improvements in transportation efficiency, safety, and cost reduction. While much of the progress has focused on highway driving and obstacle avoidance, low-speed maneuvers such as parking remain among the most difficult challenges for autonomous systems.

This challenge is especially pronounced in trailer-truck transport vehicles, where the complexity of articulated motion and environmental constraints introduces significant difficulties. Unlike standard passenger vehicles, semi-trucks operate as articulated systems composed of a tractor and a trailer connected by a hitch. This structure creates nonlinear dynamics that make reversing and parking far more difficult than forward motion. The trailer introduces additional degrees of freedom that must be actively managed, and failure to do so risks dangerous conditions such as jackknifing or trailer swing.

Beyond vehicle control challenges, the problem extends to infrastructure limitations. Safe and accessible parking spaces for large vehicles are scarce, particularly in urban environ-

ments. As automation increases within the trucking industry, the need for intelligent, infrastructure-aware parking systems becomes critical.

This paper makes two distinct contributions. First, it proposes a unified system architecture for autonomous truck parking by synthesizing existing research across perception, planning, control, and infrastructure awareness into a single cohesive design. This proposed architecture was not fully implemented; it represents a design target informed by the literature review. Second, we describe a proof-of-concept simulation in which an open-source A* path planning codebase was adapted to include a truck-trailer kinematic model, providing an initial implementation baseline for future development. The remainder of this paper is organized as follows: Section II provides relevant background, Section III surveys the related literature, Section IV presents the proposed system architecture, Section V describes our implementation and results, Section VI discusses findings and challenges, and Section VII concludes the paper.

II. BACKGROUND

Autonomous driving systems are typically divided into several functional layers: sensing, perception, localization, planning, and control. Each layer contributes to safe and reliable vehicle operation, and a failure at any layer can compromise the entire system.

Parking differs fundamentally from general driving tasks because it prioritizes precision over speed. Vehicles must navigate tight spaces, avoid static and dynamic obstacles, and align accurately with designated parking areas. These requirements demand higher positional accuracy than highway or urban driving scenarios.

For trucks, these challenges are compounded by large vehicle dimensions and articulated motion dynamics. The tractor-trailer configuration behaves differently depending on whether the vehicle is moving forward or reversing. During reversing maneuvers, the trailer responds inversely to steering inputs, making path following significantly more difficult. Additionally, the extended length of the combined vehicle increases the swept area during turns, raising the risk of collision with infrastructure or other vehicles. Understanding these dynamics

is essential context for the system design decisions discussed in subsequent sections.

III. LITERATURE REVIEW

The development of an autonomous truck parking system requires integration across multiple research domains, each contributing a critical layer to the overall architecture. This section synthesizes the key findings from the reviewed literature into a unified system-level perspective.

Motion planning forms the foundation of any autonomous parking solution. Hybrid A* path planning is particularly well-suited for articulated vehicles because it incorporates non-holonomic vehicle kinematics directly into the search process, producing trajectories that are both collision-free and physically realizable [3]. This is complemented by Nonlinear Model Predictive Control (NMPC), which refines trajectories in real time by minimizing a cost function subject to constraints such as obstacle avoidance, steering limits, and hitch angle bounds [4]. A Linear Quadratic Regulator (LQR) can then be applied as a tracking layer to minimize deviation from the planned path with computational efficiency.

Reliable perception underpins safe parking execution. Transformer-based sensor fusion architectures, such as TransFuser, extend beyond local geometric alignment by enabling global attention across camera and LiDAR inputs [2]. This allows the system to reason about spatially distributed features, such as parking boundaries and dynamic obstacles, within a unified environmental representation. Bird's Eye View (BEV) projections further simplify downstream planning by providing a structured, sensor-agnostic top-down scene description.

Infrastructure awareness is equally essential, as the availability and legality of parking locations directly constrain the planning problem. Data-driven classification frameworks leveraging GPS trajectories and geospatial datasets enable systematic identification of viable truck parking areas, evaluated along dimensions of accessibility, legality, and roadside status [5]. Shared mapping systems extend this capability by aggregating real-time contributions from multiple vehicles, enabling dynamic updates to parking availability.

Deep reinforcement learning (DRL) offers a complementary, policy-based perspective on parking [6]. By learning control strategies directly from environmental interaction using BEV state representations, DRL methods can produce adaptive behaviors without explicit trajectory computation. However, their high training demands and limited interpretability suggest they are best deployed in concert with classical planners rather than as standalone solutions.

Lastly, through the coordination of various agents, the foundations for future scalable deployment are laid out. Reservation-based architectures allow vehicles to negotiate and secure parking spots in advance, while dynamic conflict resolution mechanisms reduce congestion in shared environments.

Taken together, the reviewed literature points toward a layered architecture comprising sensor fusion, infrastructure modeling, Hybrid A* or NMPC-based trajectory planning,

LQR control, and multi-agent coordination as the most promising framework for autonomous truck parking. Our work builds directly on this foundation: we adopt Hybrid A* as the core planning algorithm based on its demonstrated suitability for nonholonomic articulated vehicles, and we use the infrastructure classification framework of "*A data driven systematic approach for identifying and classifying long haul truck parking locations*" [5] as the basis for our proposed parking space identification layer. Where the reviewed systems primarily address passenger vehicle parking or single-body vehicle dynamics, our contribution specifically targets the tractor-trailer kinematic coupling that makes truck parking a qualitatively harder problem. Table I in Section IV summarizes how our approach compares to the reviewed methods at a feature level.

IV. PROPOSED SYSTEM ARCHITECTURE

It is important to note that the architecture described in this section is a *proposed design* synthesized from the reviewed literature. It represents the full system that would be required for production-ready autonomous truck parking. The components that were actually implemented as part of this project are described separately in Section V. The proposed architecture is included here to situate our proof-of-concept within a complete system context and to serve as a roadmap for future development.

The proposed system is organized as a layered pipeline in which each stage processes the output of the stage above it and passes its result downstream. Figure 1 illustrates the full architecture. At the top, raw sensor data from LiDAR, cameras, radar, and GPS/IMU units are fused into a unified environmental model. The perception layer produces a Bird's Eye View scene representation, while the localization layer maintains a continuous pose estimate of both the tractor and the trailer. These outputs feed into the motion planning stage, which queries a parking infrastructure database to identify candidate spaces and then generates a collision-free trajectory using Hybrid A* search. A secondary NMPC layer refines that trajectory before it is passed to the control system, which issues low-level steering, throttle, and braking commands to the vehicle. A hitch-angle safety constraint is enforced at the control layer at all times to prevent jackknifing.

The following subsections describe each proposed layer and the design rationale behind the algorithmic choices.

A. Perception and Sensor Fusion

Accurate perception is fundamental to autonomous parking. Vehicles rely on multiple sensors, including cameras, LiDAR, radar, and GPS, each of which provides complementary information about the environment.

Cameras capture rich semantic details such as lane markings, signage, and pedestrians, but lack reliable depth estimation. LiDAR provides precise 3D spatial point clouds but does not capture semantic context. Radar offers robust performance in adverse weather but at lower spatial resolution. Combining these modalities through sensor fusion produces

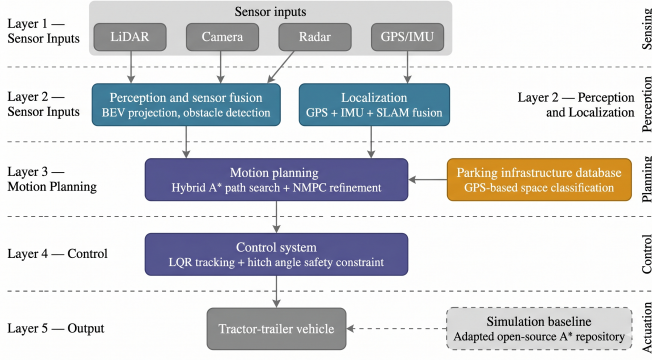


Fig. 1. Proposed layered architecture for autonomous truck parking. Sensor inputs flow through perception and localization into motion planning, which queries a parking infrastructure database before generating a trajectory. The control system executes the trajectory subject to a hitch-angle safety constraint. Note that this is a proposed design; only the path planning and kinematic modeling components were implemented in this work.

a more complete and reliable environmental model than any single sensor alone [1].

The proposed architecture uses a transformer-based fusion approach, motivated by architectures such as TransFuser [2], which enables global attention across all sensor inputs simultaneously. Fused sensor data is projected into a Bird’s Eye View (BEV) representation, which provides a structured, top-down perspective of the environment and simplifies downstream planning by decoupling spatial layout from sensor-specific viewing angles. This component was not implemented in the current work.

B. Localization

Localization determines the vehicle’s precise position and orientation within its environment. For parking, localization must be accurate to within centimeters, as small positional errors can result in misalignment with the parking target or collision with nearby obstacles.

GPS alone is insufficient for this level of accuracy, particularly in urban environments where signal multipath and occlusion from buildings degrade positioning quality. The proposed architecture fuses GPS with inertial measurement units (IMUs), wheel odometry, and LiDAR-based simultaneous localization and mapping (SLAM) techniques. For truck parking specifically, localization must also account for the relative pose between the tractor and trailer, as the hitch angle directly affects trajectory planning. This component was not implemented in the current work.

C. Motion Planning

Motion planning generates a feasible, collision-free path from the vehicle’s current state to the desired parking position. For articulated vehicles, this involves satisfying complex kinematic and dynamic constraints simultaneously.

The proposed architecture uses Hybrid A* as the primary planning algorithm because it extends the classical A* graph search with a continuous vehicle state representation [3]. By

incorporating the vehicle’s steering and motion model directly into the search, Hybrid A* guarantees that generated paths respect the nonholonomic constraints of the tractor-trailer system, including minimum turning radius and maximum hitch angle.

To refine and optimize these trajectories, NMPC is applied as a secondary planning layer. NMPC solves the following optimization problem at each time step:

$$\min_u \sum_{k=0}^N ((x_{ref,k} - x_k)^2 + \lambda u_k^2) \quad (1)$$

where x_k is the vehicle state, $x_{ref,k}$ is the reference trajectory, u_k is the control input, and λ is a regularization weight. This formulation penalizes both tracking error and excessive control effort, producing smooth and feasible parking trajectories [4]. The NMPC layer was not implemented in the current work; path planning in our proof-of-concept uses A* search with B-spline smoothing as provided by the baseline repository.

D. Control System

The proposed control system executes the planned trajectory by generating low-level actuator commands for steering, throttle, and braking. We propose using a Linear Quadratic Regulator (LQR) as the trajectory tracking controller due to its computational efficiency and well-understood stability properties. The LQR minimizes the following cost functional:

$$J = \sum_{k=0}^{\infty} (x_k^T Q x_k + u_k^T R u_k) \quad (2)$$

where Q and R are positive semi-definite weighting matrices that balance state deviation against control effort. A critical safety constraint is the hitch angle limit: if the angle between the tractor and trailer exceeds a threshold during reversing, the vehicle enters a jackknifing condition. The control system must enforce a hard constraint on the hitch angle at all times. In our proof-of-concept, trajectory control is handled by the MPC controller provided in the baseline repository rather than a separately implemented LQR layer.

E. Parking Infrastructure and Data Systems

The proposed architecture includes a data-driven infrastructure layer that builds spatial databases of parking locations from GPS trajectory data and geospatial datasets [5]. Each candidate location is evaluated against attributes such as physical dimensions, surface type, legal status, proximity to roadways, and accessibility for large vehicles. This component was not implemented in the current work; parking spot selection in our simulation is handled by a fixed 24-spot grid environment.

F. Comparison with Related Work

Table I summarizes how the proposed architecture compares to the key systems reviewed in the literature across five feature dimensions.

TABLE I
FEATURE COMPARISON: PROPOSED ARCHITECTURE VS. RELATED WORK

Feature	Hybrid A* [3]	Trans-Fuser [2]	DRL [6]	Infra. [5]	Ours
Articulated vehicle support	Yes	No	No	No	Yes
Sensor fusion	No	Yes	No	No	Proposed
Infrastructure awareness	No	No	No	Yes	Proposed
Real-time trajectory refine.	No	No	No	No	Proposed
Trailer kinematic model	No	No	No	No	Yes
Simulation validated	Yes	Yes	Yes	No	Partial

V. IMPLEMENTATION AND RESULTS

This section describes what was actually built and tested as part of this project, distinct from the proposed architecture in Section IV.

A. Simulation Environment Selection

Our implementation process went through several environment evaluations before arriving at a working baseline. We initially planned to develop the system within CARLA, a high-fidelity autonomous driving simulator. However, CARLA’s large installation footprint made it impractical to run on team members’ personal machines, and scheduling conflicts limited consistent access to the university lab environment where it was available. This made iterative development within CARLA unsustainable for our project timeline.

We subsequently considered Gazebo and MATLAB as alternatives. Gazebo was unfamiliar to the team and would have required significant ramp-up time before any truck-specific work could begin. MATLAB, while familiar in other contexts such as linear algebra, was not an area of experience for the team in the context of visual simulation or vehicle modeling, and again, consistent lab access was a limiting factor.

Given these constraints, we pivoted to an open-source command-line A* parking simulation [7] as a lean implementation baseline. This approach was well-suited to the team’s existing strengths: the repository was cloneable and runnable locally using standard tools (Git, Python, and the command line), and the codebase was accessible enough to modify without requiring deep familiarity with a large simulation framework. This allowed us to direct our effort toward the core technical problem of extending single-body path planning to an articulated tractor-trailer system, rather than simulator configuration.

B. Trailer Extension and Kinematic Modeling

The core implementation contribution of this project is the modification of the open-source baseline to incorporate trailer dynamics. In the original codebase, path planning operates over a single rigid vehicle body. We extended this to a two-body model by adding a trailer unit connected to the tractor

at a hitch point, with the trailer’s heading governed by the following kinematic relationship:

$$\dot{\psi}_t = \frac{v}{L_t} \sin(\psi - \psi_t) \quad (3)$$

where ψ is the tractor heading, ψ_t is the trailer heading, v is the vehicle speed, and L_t is the trailer length. This formulation captures the inverse steering response of the trailer during reversing maneuvers and enforces the geometric coupling between the two bodies throughout path execution.

Figure 2 illustrates the full pipeline of the adapted simulation, from script initialization through to vehicle actuation and real-time visualization.

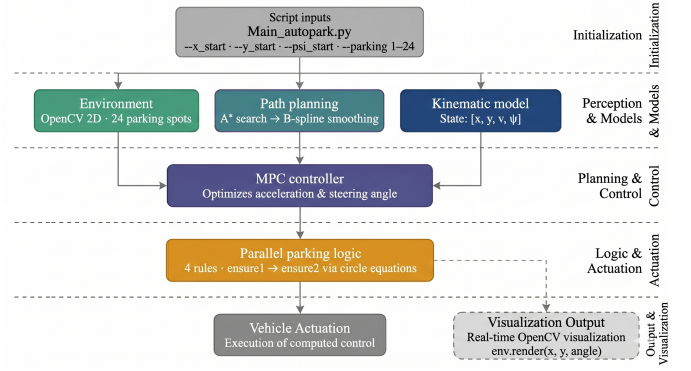


Fig. 2. Architecture of the adapted open-source simulation baseline, showing the pipeline from script inputs through path planning, kinematic modeling, and MPC control to vehicle actuation and visualization output.

C. Results

Table II summarizes the outcomes of our implementation effort across the environments and configurations we evaluated, including basic high-level metrics collected from the simulation run.

TABLE II
IMPLEMENTATION OUTCOME SUMMARY

Component / Task	Status	Notes
CARLA simulation setup	Not adopted	Hardware access and scheduling constraints
Gazebo / MATLAB evaluation	Not adopted	Unfamiliar tooling; lab access limitations
A* baseline integration	Complete	Simulation runs in command-line environment
Trailer kinematic model	Complete	Tractor-trailer two-body model implemented
Path planning (fixed route)	Successful	Vehicle and trailer navigate target path
Dynamic / arbitrary paths	In progress	Current paths are fixed; generalization is future work
Full sensor fusion pipeline	Planned	Architecture designed; not yet implemented

The adapted simulation successfully plans and executes a parking path for a tractor-trailer vehicle, correctly modeling

the motion of both the tractor and the trailer throughout the maneuver. The trailer heading updates in real time as the tractor navigates the path. Path computation completes within a short planning phase before vehicle motion begins, after which the MPC controller executes the trajectory in real time. During testing, jackknifing behavior was observed in certain configurations, indicating that while the trailer kinematic model is functional, hitch angle constraint enforcement is not yet robust across all maneuver conditions. This is consistent with the current state of the implementation as a proof-of-concept rather than a production system, and addressing jackknife prevention is identified as a priority for future work. The primary limitation beyond jackknifing is path generalizability: the simulation produces a consistent result for the fixed tested route, and work remains to support arbitrary start-goal configurations and dynamic obstacle avoidance.

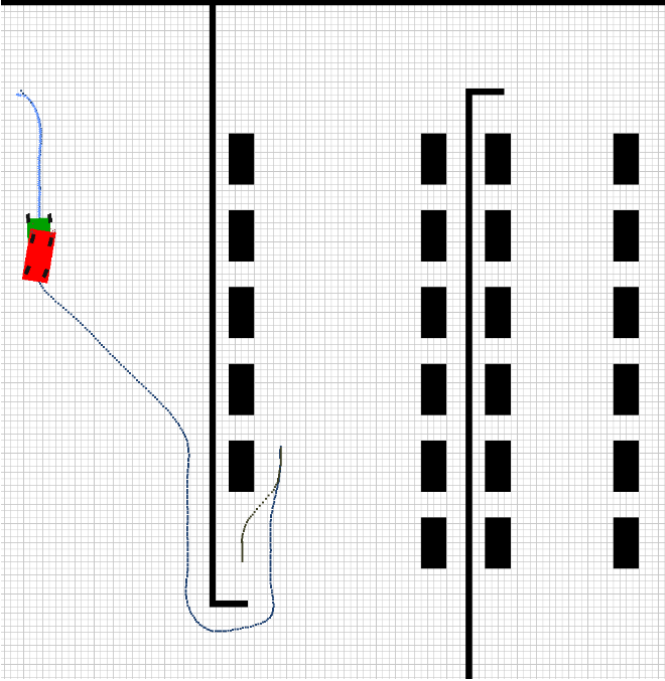


Fig. 3. Command-line simulation showing the tractor-trailer vehicle navigating toward the target parking space. The trailer unit is rendered behind the tractor and its heading updates dynamically throughout the maneuver.

VI. DISCUSSION AND CHALLENGES

Autonomous truck parking is a multi-layered problem that cannot be solved by any single technique in isolation. The framework presented in this paper demonstrates that effective solutions require tight integration across perception, planning, control, and infrastructure awareness. Each layer depends on the others: accurate perception enables reliable planning, feasible plans enable safe control, and infrastructure data enables the system to identify actionable parking targets in the first place.

Our implementation experience reinforced this dependency. The decision to pivot away from high-fidelity simulators was ultimately driven by the realization that the vehicle kinematic

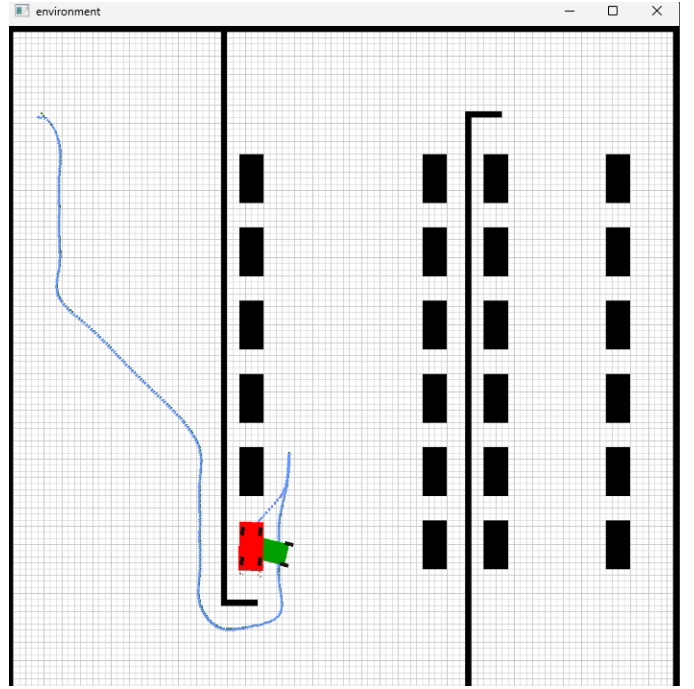


Fig. 4. Simulation output after completion of the parking maneuver, showing the tractor-trailer vehicle aligned with the target parking space. The trailer heading has not yet fully converged to match the tractor orientation in our implementation.

model, specifically the articulated tractor-trailer coupling, was the foundational challenge that had to be addressed before any higher-level system integration would be meaningful. Getting the kinematics right in a simpler environment first provides a validated model that can later be ported into a more capable simulation platform.

The incorporation of shared mapping in the broader proposed architecture introduces an important collaborative dimension, allowing the system to benefit from the collective experience of a fleet rather than relying solely on onboard sensing. This is particularly valuable for truck parking, where infrastructure conditions are highly variable and difficult to capture in static maps.

Several significant challenges arose during this project and remain in any effort to realize a fully autonomous truck parking system:

- **Simulation environment accessibility:** High-fidelity simulators such as CARLA posed practical barriers including large installation size and the need for dedicated lab hardware, while Gazebo and MATLAB required domain expertise the team did not have in visual vehicle simulation. These constraints collectively made iterative development in those environments infeasible within the project timeline, motivating the pivot to a locally-runnable open-source baseline.
- **Computational requirements:** Real-time NMPC and transformer-based fusion impose substantial processing demands that must be met within the latency constraints

of a live control loop. These demands were not addressed in the current proof-of-concept but will be central in any production system.

- **Limited truck-specific datasets:** Most publicly available autonomous driving datasets are collected from passenger vehicles, limiting the availability of training and evaluation data specific to articulated truck dynamics.
- **Complex articulated dynamics:** The nonlinear coupling between tractor and trailer motion, particularly during reversing, makes trajectory planning and control significantly more difficult than for single-body vehicles. This was the central technical challenge of our implementation work.
- **Path generalizability:** The current simulation produces consistent results for a fixed route but does not yet generalize to arbitrary parking targets. Extending A* search over the full configuration space of the articulated vehicle is required to address this.
- **Hitch angle constraint enforcement:** While the trailer kinematic model correctly captures articulated vehicle dynamics, jackknifing was observed during certain tested configurations. Robust enforcement of the hitch angle safety constraint across arbitrary maneuvers remains an open problem for future implementation work.

VII. CONCLUSION

This paper presented a research synthesis and proof-of-concept implementation for autonomous truck parking, addressing one of the most mechanically demanding problems in autonomous vehicle systems. Our primary contributions are threefold. First, we conducted a systematic survey of the algorithmic components required for a full autonomous truck parking pipeline, including sensor fusion, localization, Hybrid A* motion planning, NMPC trajectory refinement, LQR control, and data-driven parking infrastructure, and synthesized them into a proposed unified system architecture. Second, we evaluated multiple simulation environments (CARLA, Gazebo, MATLAB) for truck-specific applicability and identified the critical gap in articulated vehicle support that limits their use for this problem. Third, we adapted an open-source A* path planning simulation to incorporate a tractor-trailer kinematic model, producing a working proof-of-concept that models trailer motion throughout a parking maneuver, though robust jackknife prevention across all configurations remains future work.

The key finding of our implementation work is that the articulated kinematic model is the irreducible foundation of any truck parking system: until the two-body dynamics are correctly represented, higher-level planning and control layers cannot meaningfully be integrated or evaluated. Our adapted simulation validates this model in a controlled environment and provides a baseline for future development.

Future work will focus on three areas. First, extending the path planner to support arbitrary start-to-goal configurations rather than fixed routes, enabling generalized parking in varied environments. Second, integrating the validated kinematic

model into a more capable simulation platform such as Gazebo or MATLAB for higher-fidelity testing. Third, incrementally adding the perception, sensor fusion, and infrastructure layers described in the proposed architecture, working toward a full end-to-end implementation.

ACKNOWLEDGMENT

The authors would like to thank Florida Gulf Coast University for its support.

REFERENCES

- [1] A. Farag and Z. Saleh, "Processing Bare LiDAR Data for Direct Use in Autonomous Vehicle Applications," *Electronics*, vol. 8, no. 11, p. 1238, 2019.
- [2] K. Chitta, A. Prakash, B. Jaeger, Z. Yu, K. Renz, and A. Geiger, "TransFuser: Imitation with Transformer-Based Sensor Fusion for Autonomous Driving," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 45, no. 11, pp. 12878–12895, 2023.
- [3] D. Dolgov, S. Thrun, M. Montemerlo, and J. Diebel, "Practical Search Techniques in Path Planning for Autonomous Driving," in *Proc. AAAI Workshop on AI in Autonomous Vehicles*, Chicago, IL, 2008.
- [4] M. Werling, J. Ziegler, S. Kammel, and S. Thrun, "Optimal Trajectory Generation for Dynamic Street Scenarios in a Frenet Frame," in *Proc. IEEE International Conference on Robotics and Automation (ICRA)*, Anchorage, AK, 2010, pp. 987–993.
- [5] E. A. Nevland, K. Gingerich, and P. Y. Park, "A data driven systematic approach for identifying and classifying long haul truck parking locations," *Transport Policy*, vol. 96, pp. 48–59, 2020.
- [6] Z. Du, M. Chen, and Y. Liu, "Autonomous Parking via Deep Reinforcement Learning with Bird's Eye View Representations," *IEEE Access*, vol. 10, pp. 45123–45134, 2022.
- [7] Pandas-Team, "Automatic-Parking: A simulation of automatic parking using A* path planning and MPC control," GitHub repository, 2020. [Online]. Available: <https://github.com/Pandas-Team/Automatic-Parking>. [Accessed: Apr. 2026].

APPENDIX

The work described in this paper reflects the following team member contributions.

George Alenchery: Conducted research on autonomous parking systems for articulated vehicles, investigated the Hybrid A* algorithm as the proposed planning method, and identified the open-source A* simulation GitHub repository used as the implementation baseline [7].

Thomas Jeske: Researched and reported on current limitations the trucking sector faces and proposed solutions regarding parking. Investigated the usability of the Viper Lab. Assisted in the discovery of a key GitHub repository that helped show what was possible for the project's implementation, and suggested the trailer edit for a final output closer to the project goals.

Lentz Fortune: Added an inheritance class called "Trailer Dynamics" and edited the Environment.py file in the Automatic Parking GitHub repository in order to render a trailer to the back of the car parking simulation, allowing the repository to better reflect the project goals.

Jordan Fletcher: Researched sensor fusion and how systems like TransFuser combine LiDAR and camera data to improve environmental understanding in autonomous vehicles. Helped with writing the paper and kept progress updates organized.

Amber Jones: Researched real-time object detection techniques using LiDAR-camera fusion integrated with adaptive dynamic programming for autonomous truck-trailer driving, contributing to the understanding of how perception and control strategies are combined.

Tristan Lindo-Slones: Researched two-layered architecture for autonomous parking, including deep reinforcement learning combined with a kinematic model for accurate alignment. This research informed the approach to managing complex articulated surroundings during reversing and docking.

Tova Quinones: Contributed to the research and conceptual design of the system by investigating motion planning and sensor fusion, focusing on trajectory planning, control systems, and multi-source data fusion in limited parking environments.