


# Shortening to L=1.800 mm suppresses persistent opposing-wall bridge | synchronized fixed camera


## Long baseline | actual L~2.9 mm

t=0.0000 ms  
directed/folded=167.3/12.7 deg  
gap=+269.39  $\mu\text{m}$  | contact=off  
bridge20=no | delta s=+0.000 mm

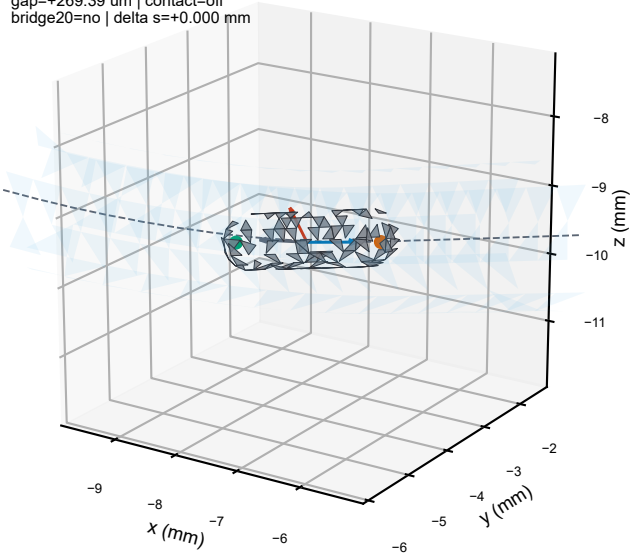

## Old scaled mesh | L=1.800 mm

t=0.0000 ms  
directed/folded=167.7/12.3 deg  
gap=+281.70  $\mu\text{m}$  | contact=off  
bridge20=no | delta s=+0.000 mm

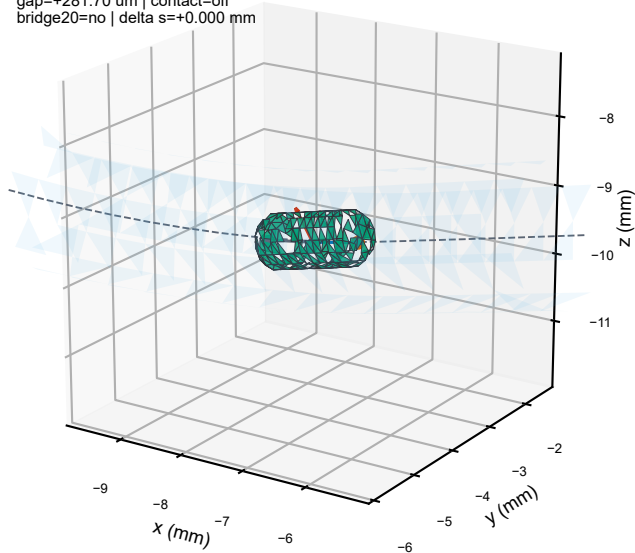

## Exact FreeCAD circular head | L=1.800 mm

t=0.0000 ms  
directed/folded=166.7/13.3 deg  
gap=+268.01  $\mu\text{m}$  | contact=off  
bridge20=no | delta s=+0.000 mm

